

2







2.60

H"
HEIGHT







DETAIL D
DRYWALL BEAD DETAIL
SCALE 1:4

**ROUGH OPENING:** W + 0.25" x H + 0.25" **CLEAR OPENING:** W - 2.375" x H - 1.125"

**DEGREE OF OPENING: 120°** 

NOTES:

1> FRAME: Cold Rolled Steel 16 ga, Drywall Bead

2 DOOR: Cold Rolled Steel, 14 ga

(3) **FINISH:** White Powder Coat

4 HINGE: Concealed Pin Hinge

 $\overline{(5)}$  **SECONDARY LATCH:** Varies


 $\overline{(6)}$  **LOCK:** Knurled Knob/Keyed Slam Latch

PROJECT: ARCHITECT: CONTRACTOR: QTY: PART#: DWK TITLE: Access Door, Non-Rated WxH, Uninsulated CRS, Flush Dr, Drywall Flg 9300 73rd Avenue North Brooklyn Park, MN 55428 NAME DATE SIZE DWG. NO. REV DWK ShpDr Α DRAWN RELEASED WEIGHT: VARIES SHEET 1 OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

2

1

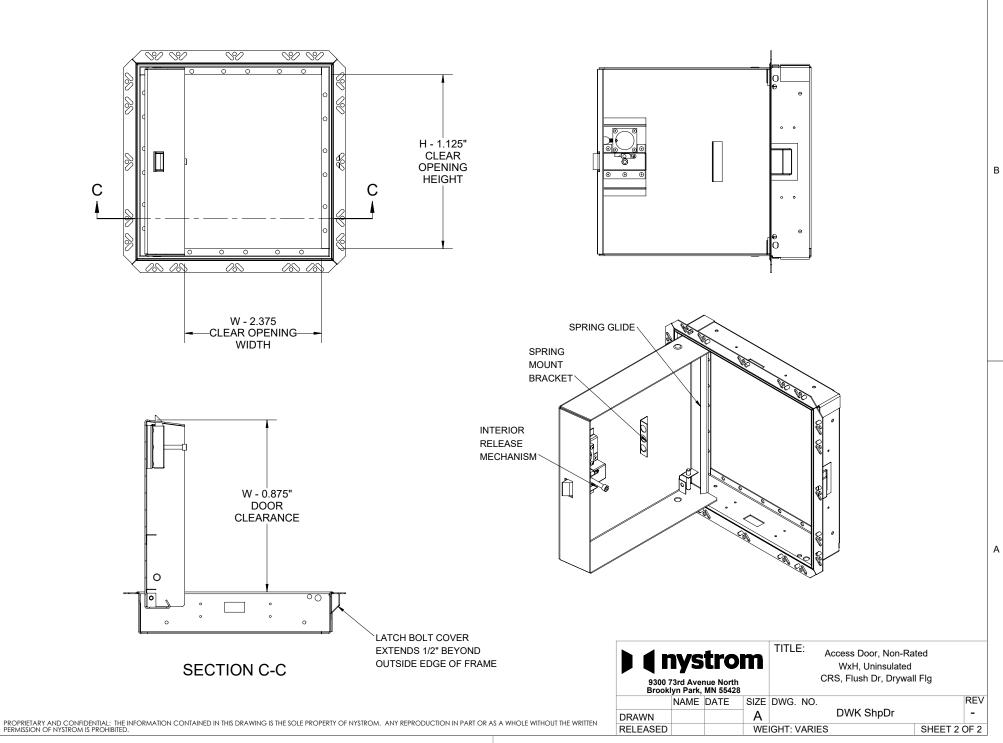

В