


| QUANTITY | LENGTH |
|----------|--------|
|          |        |
|          |        |
|          |        |
|          |        |

| COLOR |
|-------|
|       |

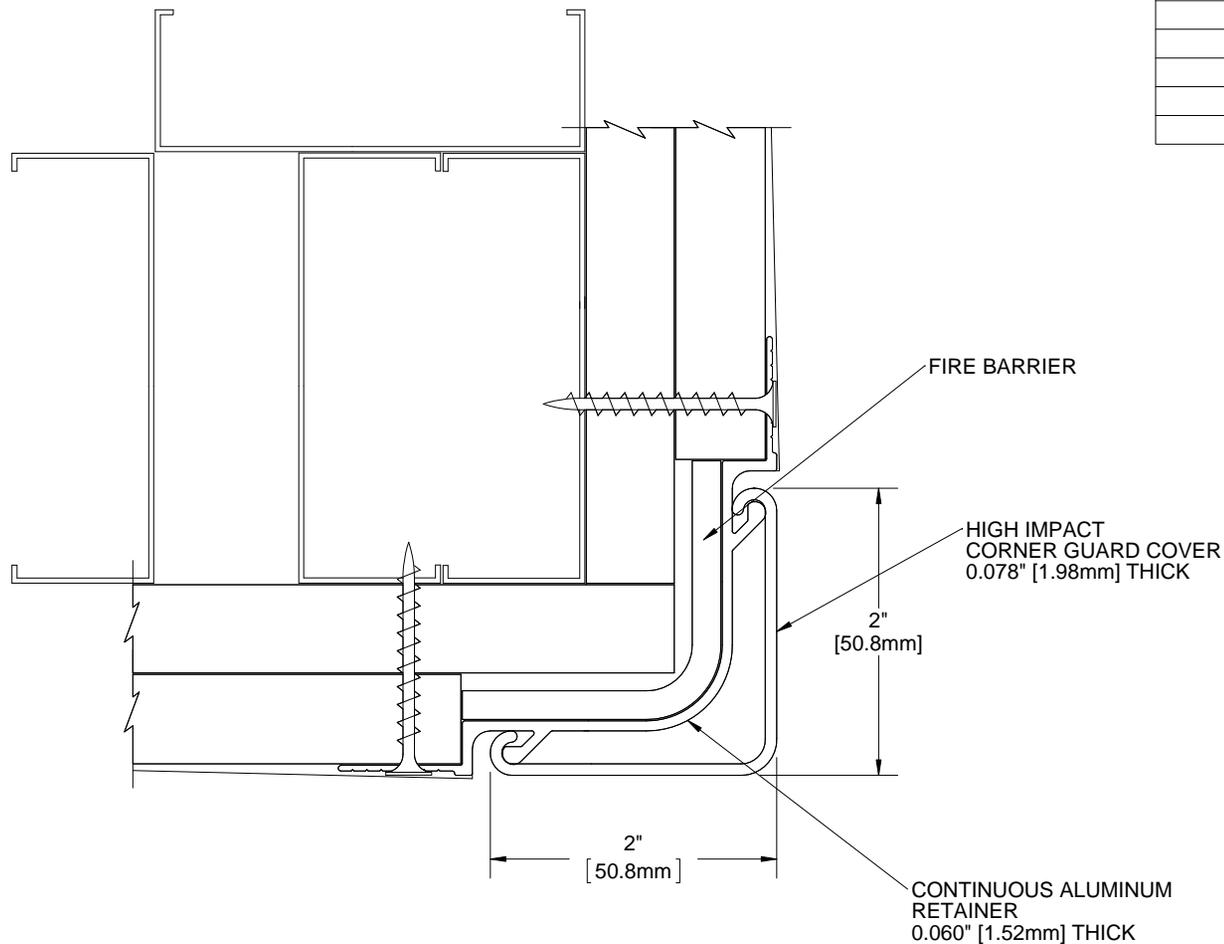

**NOTES:**

- PROFILE:** HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK
- CLASS A FIRE RATING, 2 HOUR, TESTED TO ASTM E84**
- RETAINER:** CONTINUOUS 6063 T-5 ALUMINUM, NOMINAL 0.060" (1.52mm) THICK
- EXTRUSION:** PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- MAXIMUM LENGTH:** VINYL CORNER GUARDS 20'
- HARDWARE:** #6 X 1-5/8" DRYWALL SCREWS INCLUDED
- 6063-T5 ALUMINUM COVE BASE INCLUDED, 4" STANDARD HEIGHT
- PARTITION COMPONENTS PROVIDED BY OTHERS. FINISHED LENGTH INCLUDES COVE BASE.

|  |     |   |                     |              |          |
|--|-----|---|---------------------|--------------|----------|
| PROJECT:   |     |   |                     |              |          |
| ARCHITECT:   |     |   |                     |              |          |
| CONTRACTOR:  |     |   |                     |              |          |
| <br>9300 73rd Avenue North<br>Minneapolis, MN 55428 |     | TITLE: 2" VINYL CORNER GUARD<br>RECESS MOUNT<br>2 HOUR FIRE BARRIER |                     |              |          |
|  |     | NAME  | DATE                | SIZE         | DWG. NO. |
| DRAWN  | MDS | 24APR13   | A                   | CGVF2S       | A        |
| RELEASED   | PGE | 01MAY13   | WEIGHT: 1.24 lbs/ft | SHEET 1 OF 1 |          |