

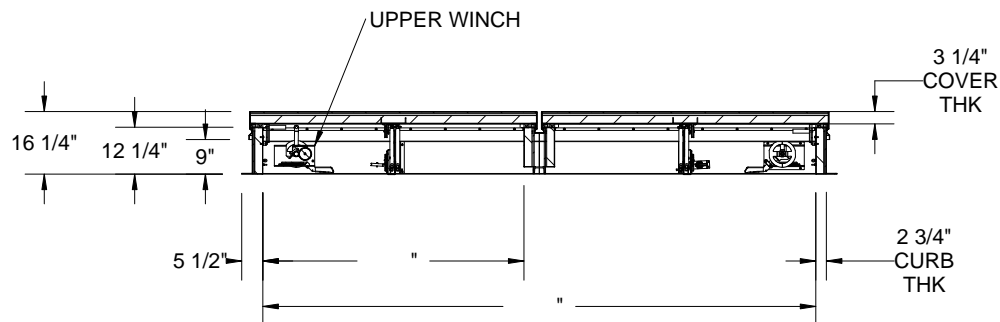


SECTION B-B



SECTION A-A

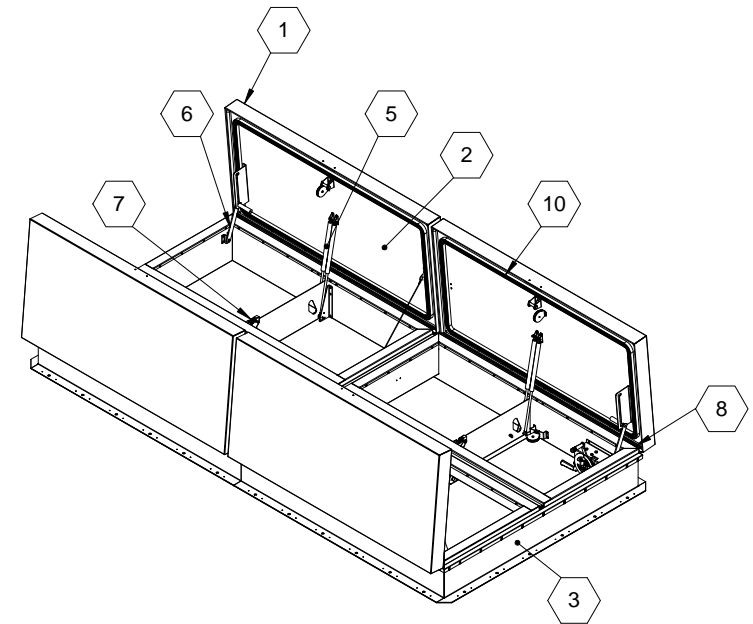

LOWER WINCH

SPECIFICATIONS:

① **COVER:** 14 GAUGE GALVANNEAL COVER STIFFENED TO WITHSTAND A LIVE LOAD OF 40 PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN

② **LINER:** 14 GAUGE GALVANNEAL

③ **CURB AND COUNTERFLASH W/ EZ TAB:**

DBL WALL CURB, 14 GAUGE GALVANNEAL

④ **FINISH: COVER -**

POWDER COAT, GRAY EXTERIOR, BLACK INTERIOR

CURB - POWDER COAT, BLACK

⑤ **GAS SPRING WITH DAMPER:** DESIGNED TO OPEN AGAINST A 10PSF SNOW LOAD IN NOT LESS THAN 2 SECONDS

⑥ **HOLD OPEN ARM:** LOCKS COVER IN FULLY OPEN POSITION - ZINC PLATED STEEL

⑦ **LATCH:** ZINC PLATED ROTARY LATCH ASSEMBLY DESIGNED TO HOLD COVERS CLOSED AGAINST 90 PSF WIND UPLIFT ZINC PLATED STEEL LATCH STRIKERS ON COVERS

⑧ **HINGES:** 304 STAINLESS STEEL BUTT HINGE WITH 1/4" PIN

⑨ **INSULATION:** MINERAL WOOL W/ SOUND MAT, R-VALUE 10

⑩ **GASKETS:** ADHESIVE BACKED EPDM RUBBER EXTRUSION ON CURB AND COVER

⑪ **THERMAL RELEASE MECHANISM:** VENT COVERS OPEN THERMALLY BY HEAT AT FUSIBLE LINK TEMPERATURE 165F °F

⑫ **MANUAL OPERATION:** VENT COVERS OPEN WITH EXTERNAL MANUAL PULL HANDLE, 1/16" DIA SST CABLE AND VENT COVERS OPEN AND CLOSE WITH MANUAL WINCH, 100FT 1/8" DIA CABLE

⑬ **ELECTRICAL RELEASE:** NONE

⑭ **BURGLAR BARS:** NONE


⑮ **SOUND RATING:** STC48 PER ASTM E90, OITC 36 PER ASTM E1332

SMOKE VENT SIZE "(WIDTH) x "(LENGTH)
EFFECTIVE VENTING AREA 80%




PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:			
<p>9300 73rd Avenue North Minneapolis, MN 55428</p>			TITLE: Smoke Vent, Acoustical STC48,
			Galvn Steel, Black Pwd, Gray Pwd Cvr Ext, Dbl Wall Curb,
NAME	DATE	SIZE	DWG. NO.
ELW	4/15/14	A	
RELEASED	ELW	4/15/14	WEIGHT: VARIES


SHEET 1 OF 2

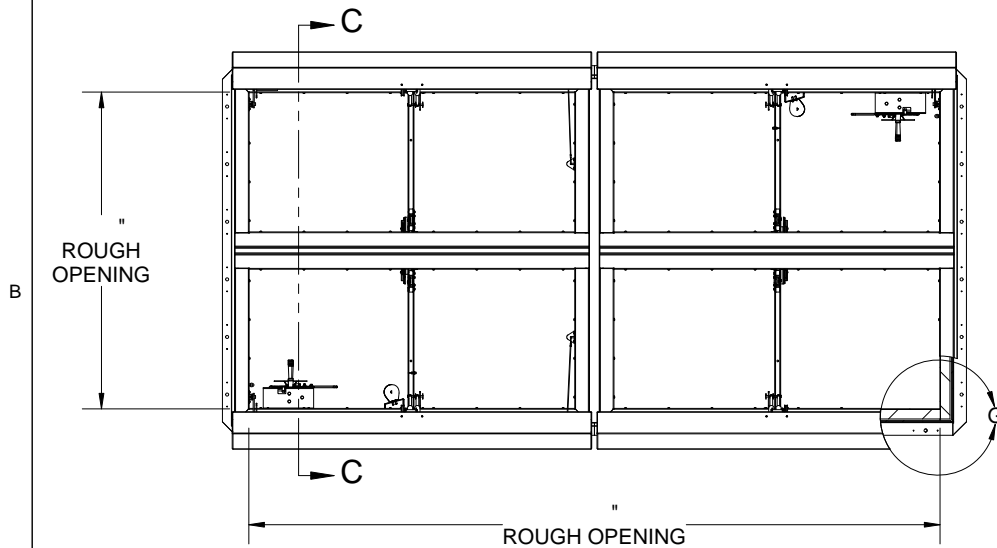


FUSIBLE LINK

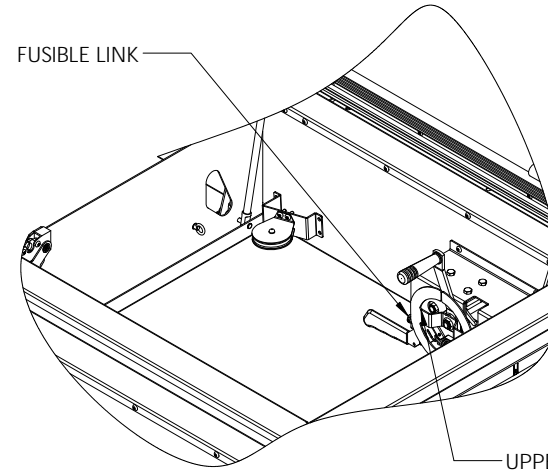


UPPER WINCH ASSEMBLY
TO FACILITATE RESETTING AFTER
THERMAL/EXTERNAL/ELECTRICAL
MANUAL RELEASE

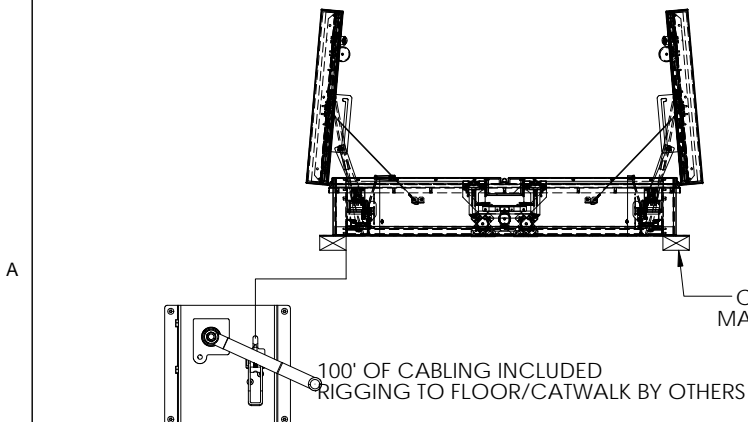

CONCRETE/WOOD/OTHER
MATERIAL PROVIDED BY OTHER
NIC

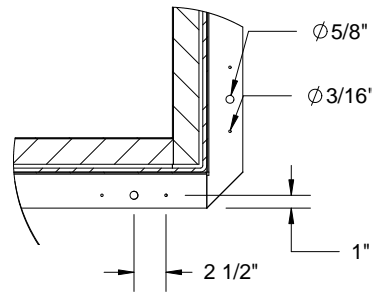

DETAIL G
SCALE 1 : 15



LOWER WINCH ASSEMBLY TO MANUALLY
OPEN AND CLOSE SMOKE VENTS

SECTION C-C

				TITLE: Smoke Vent, Acoustical STC48,	
9300 73rd Avenue North Minneapolis, MN 55428				Galvn Steel, Black Pwd, Gray Pwd Cvr Ext, Dbl Wall Curb,	
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	ELW	4/15/14	A		A
RELEASED	ELW	4/15/14		WEIGHT: VARIES	SHEET 2 OF 2