

Wing Flooring Infill System


SINGLE WING (SA) AND DOUBLE WING (DA)

BENEFITS


COORDINATE WITH FLOORING Seamless integration with existing VCT, carpet and tile flooring.

ADA COMPLIANT This system is not a trip hazard as the no bump design provides a finished flush floor transition.

SINGLE WING FLOORING INFILL SYSTEM

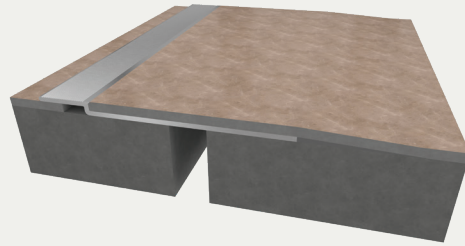

DOUBLE WING FLOORING INFILL SYSTEM

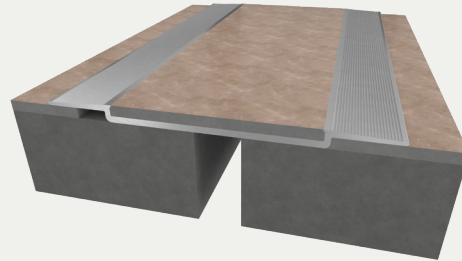

DETAILS

MATERIAL 6063-T6 Aluminum, Meets ASTM B221

FINISH Mill

MOVEMENT Thermal: Horizontal

MOUNTING Surface

JOINT SIZE Up to 2 inches

LENGTH 10 Linear Feet


LOAD Pedestrian and Light Cart

INSTALLATION Floor


OPTIONS Moisture Barrier, Fire Barrier, Additional materials, sizes, and finishes available upon request.

INSTALLATION

SINGLE WING FLOORING INFILL SYSTEM

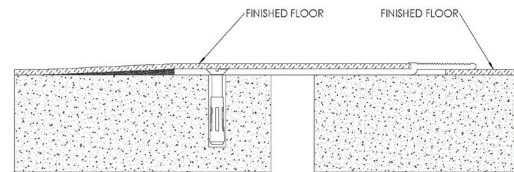

DOUBLE WING FLOORING INFILL SYSTEM

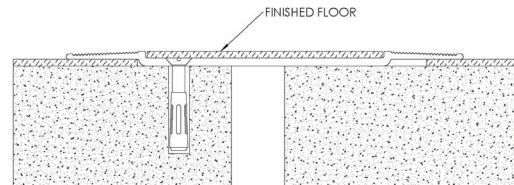

AS BUILT CONDITIONS MAY VARY. For more information, download our Installation and Operation Manuals (IOM) and Shop Drawings on nystrom.com

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	INFILL HEIGHT	TOTAL MOVEMENT
EJN-SA150-125	Floor to Floor	2" (51mm)	1.5" (38mm)	0.125" (3mm)	1.25" (32mm)
EJN-SA150-250	Floor to Floor	2" (51mm)	1.5" (38mm)	0.25" (6mm)	1.25" (32mm)
EJN-SA150-375	Floor to Floor	2" (51mm)	1.5" (38mm)	0.375" (10mm)	1.25" (32mm)
EJN-DA150-125	Floor to Floor	2" (51mm)	3" (76mm)	0.125" (3mm)	1.25" (32mm)
EJN-DA150-250	Floor to Floor	2" (51mm)	3" (76mm)	0.25" (6mm)	1.25" (32mm)
EJN-DA150-375	Floor to Floor	2" (51mm)	3" (76mm)	0.375" (10mm)	1.25" (32mm)

Additional sizes available, email info@nystrom.com for more information.