

## Seismic Aluminum Flooring System

### NO BUMP BLOCKOUT APPLICATION (SFP/SFPw)

#### BENEFITS

**SEISMIC TECHNOLOGY** The cover plate stays centered over openings before, during and after a seismic event with the use of the seismic centering bar.

**ADA COMPLIANT** Heavy pedestrian traffic requirements are met while maintaining an ADA compliant transition and no bump transition.



#### DETAILS

##### MATERIAL

6063-T5 Aluminum, Meets ASTM B221  
6061-T6 Aluminum, Meets ASTM B209  
5052 H32 Aluminum, Meets ASTM B209

**FINISH** Mill

##### MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

**MOUNTING** Blockout

**JOINT SIZE** 2-12"

**LENGTH** 10 Linear Feet

**APPLICATION** Interior


**LOAD** Pedestrian and Light Cart

**INSTALLATION** Floor


**OPTIONS** Moisture Barrier, Fire Barrier, additional materials, sizes, infill and finishes upon request

#### INSTALLATION

##### FLOOR-TO-FLOOR

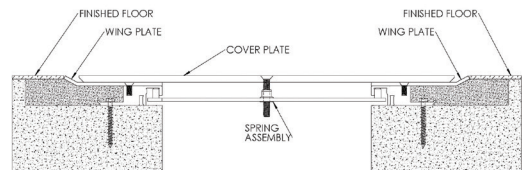

##### FLOOR-TO-WALL/CORNER

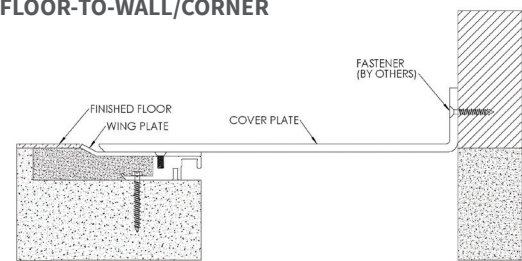

AS BUILT CONDITIONS MAY VARY. For more information, download our Installation and Operation Manuals (IOM) and Shop Drawings on [nystrom.com](http://nystrom.com)

#### ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	INFILL	TOTAL MOVEMENT
EJN-SFP-200	Floor to Floor	2" (51mm)	6" (152mm)	N/A	2" (51mm)
EJN-SFP-400	Floor to Floor	4" (102mm)	8" (203mm)	N/A	4" (102mm)
EJN-SFP-600	Floor to Floor	6" (152mm)	10.87" (276mm)	N/A	6" (152mm)
EJN-SFP-800	Floor to Floor	8" (203mm)	15.5" (394mm)	N/A	8" (203mm)
EJN-SFP-1000	Floor to Floor	10" (254mm)	18.5" (470mm)	N/A	10" (254mm)
EJN-SFP-1200	Floor to Floor	12" (305mm)	21.5" (546mm)	N/A	12" (305mm)
EJN-SFP-200W	Floor to Wall	2" (51mm)	4" (102mm)	N/A	1" (25mm)
EJN-SFP-400W	Floor to Wall	4" (102mm)	6" (152mm)	N/A	2" (51mm)
EJN-SFP-600W	Floor to Wall	6" (152mm)	8.43" (214mm)	N/A	3" (76mm)
EJN-SFP-800W	Floor to Wall	8" (203mm)	11.75" (298mm)	N/A	4" (102mm)
EJN-SFP-1000W	Floor to Wall	10" (254mm)	14.25" (362mm)	N/A	5" (127mm)
EJN-SFP-1200W	Floor to Wall	12" (305mm)	16.75" (425mm)	N/A	6" (152mm)

Additional options available, email [info@nystrom.com](mailto:info@nystrom.com) for more information.