


QUANTITY

COLOR

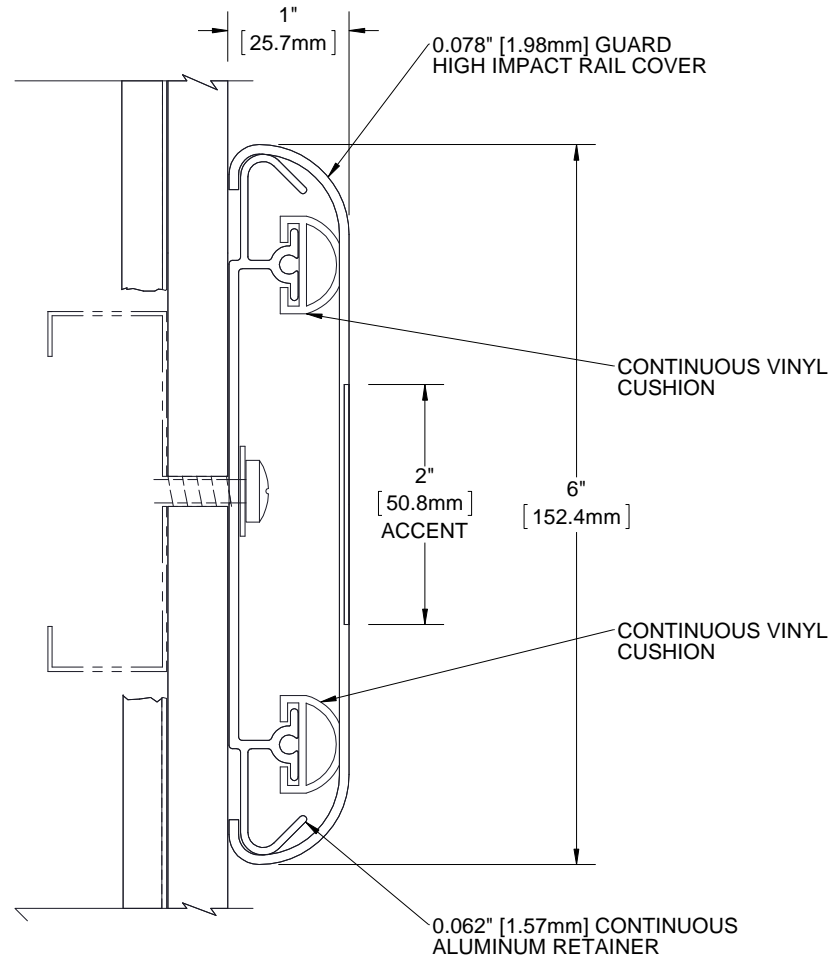

NOTES:

1. **PROFILE:** HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK
2. CLASS A FIRE RATING, TESTED TO ASTM E84
3. **RETAINER:** CONTINUOUS 6063 T-5 ALUMINUM RETAINER, NOMINAL 0.062" (1.57mm) THICK
4. **EXTRUSION:** PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
5. **VINYL CRASH RAIL LENGTH:** PROVIDED IN 20' CONTINUOUS SECTIONS
6. END CAP: #CRVS6C-EC, OUTSIDE CORNER: #CRVS6C-OC, 135 DEG OUTSIDE CORNER: #CRVS6C-OC135, SPLICE KIT: #CRVS6C-SK
7. FASTENERS AND PARTITION COMPONENTS PROVIDED BY OTHERS.

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE: 6" VINYL CRASH RAIL ACCENT STRIP SURFACE MOUNT, CONTINUOUS RETAINER	
		DWG. NO. CRVS6C-AS	
NAME	DATE	SIZE	REV
DRAWN MDS	23APR13	A	A
RELEASED	PGE	01MAY13	WEIGHT: 1.13 lbs/ft

SHEET 1 OF 1