



QUANTITY

COLOR

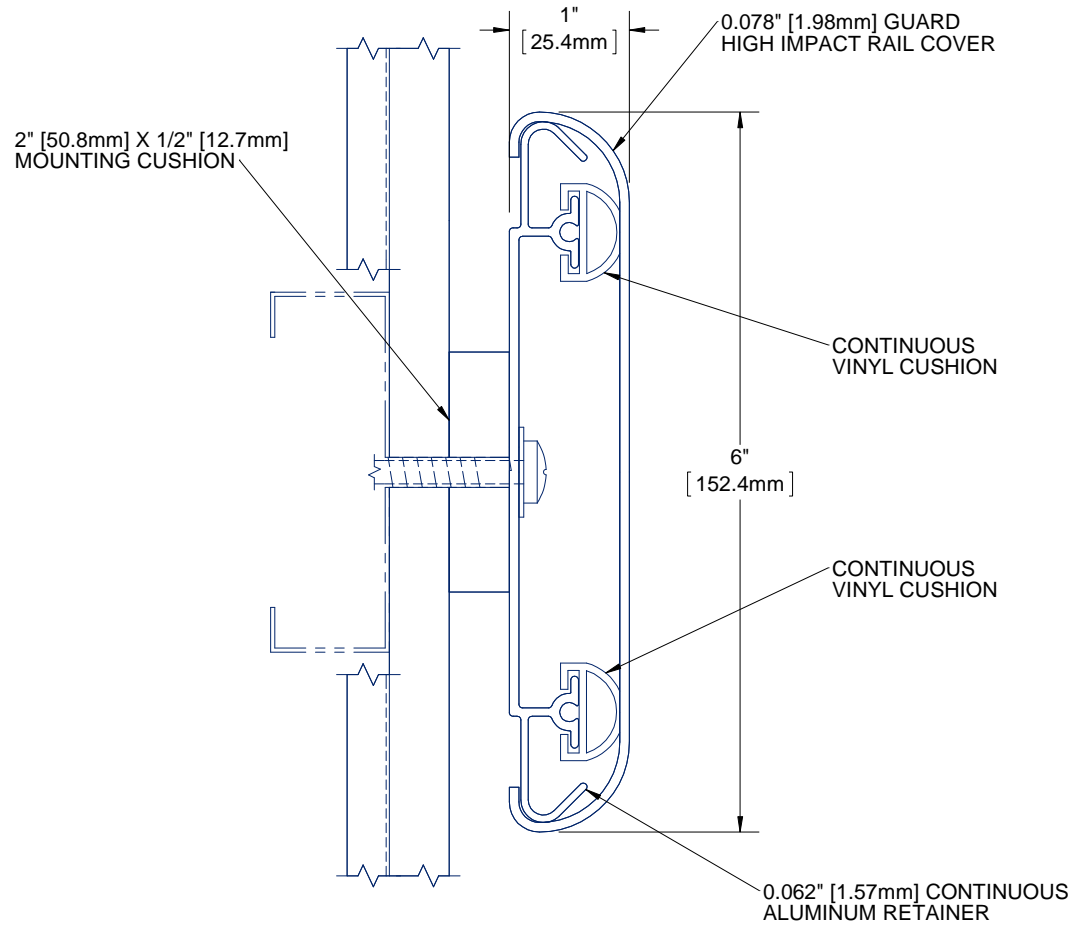

**NOTES:**

1. **PROFILE:** HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK
2. CLASS A FIRE RATING, TESTED TO ASTM E84
3. **RETAINER:** CONTINUOUS 6063 T-5 ALUMINUM RETAINER, NOMINAL 0.062" (1.57mm) THICK
4. **EXTRUSION:** PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
5. **VINYL CRASH RAIL LENGTH:** PROVIDED IN 20' CONTINUOUS SECTIONS
6. END CAP: #CRVS6C-EC, OUTSIDE CORNER: #CRVS6C-OC, 135 DEG OUTSIDE CORNER: #CRVS6C-OC135, SPLICE KIT: #CRVS6C-SK
7. FASTENERS AND PARTITION COMPONENTS PROVIDED BY OTHERS.

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE: 6" VINYL CRASH RAIL SURFACE MOUNT 1/2" CUSHION, CONTINUOUS RETAINER	
NAME	DATE	SIZE	DWG. NO.
DRAWN	MDS 24APR13	A	CRVS6C-C05
RELEASED	PGE 01MAY13	WEIGHT: 1.16 lbs/ft	SHEET 1 OF 1