



Direct Service Done Right

DIV 5 STAIR TREADS + NOSINGS 05 5000



FALL PROTECTION 05 5213 / 07 7200



For over 70 years Nystrom has been the go to manufacturer for specialty building products.

Today we provide a wide range of floor, roof and safety related access products that help create safer, more accessible buildings.

DIV 7 ROOF HATCHES 07 7200



SMOKE VENTS 07 7200



PREFORMED JOINT SEALS + EXPANSION JOINT SYSTEMS 07 9100 + 07 9513



DIV 8 ACCESS DOORS + PANELS 08 3100



FLOOR DOORS + HATCHES 08 3483



DIV 10 LUMINOUS EGRESS PRODUCTS 10 1443



FIRE PROTECTION CABINET + FIRE EXTINGUISHERS 10 4413 + 10 4416



ENTRANCE MATS + FRAMES ENTRANCE FLOOR GRILLES 12 4813 + 12 4816



DIV 12



Poly. Carpet

Vinyl Grid

15

16

17

18

19

18-19

QuietFLEX®

MATdesign®

VINYL MATS

MAXtread™

MAXgrid™

MATrac™


23

23

Direct Service Done Right

Nystrom offers a broad line of specialty building products to better serve construction professionals and architects.

We have customer focused professionals and hassle-free processes that directly serve and simplify the building process.

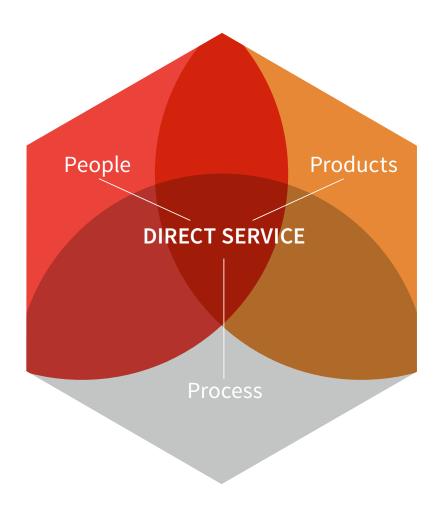

PROCESS

architects, engineers, designers, estimators, construction professionals, and service specialists

PRODUCTS

estimating & bid design support, tech support, logistics support, installation support, cad, revit/ bim

standard & custom designs, warehousing, quality assurance, exceptional warranties, leed certification, labeling & tagging

TIME

EFFICIENCY

SERVICE



By giving architects, designers and contractors open access to our expert team, we simplify the process of specifying and procuring access products from design through delivery and installation.



DESIGN TOOLS 📦 вімsmith° CAD

Shop Drawings



Approved Continuing Education

EDUCATION COURSES

Roof Hatch & Smoke Vents



SPEC AUTOMATION



MasterSpec* 3-Part Specifications



DOCUMENTATION

LEED/HPD INSTALL & Operation Manual Replacement Product Warranty Support



PRODUCT EXPERTS

Design Engineer Sales & Technical Support **Specification Consultants**



INSPIRATION

Project Profiles & Gallery

SYSTEM SELECTION GUIDE


A well designed system uses a two or three zone approach with a minimum of 18 feet of traffic length to stop 90% of dirt and moisture from infiltrating the building.

The main purpose of an entrance system is to stop dirt, sand and moisture at a building entrance; however, a well-designed system will accomplish more than removal.

Exterior
The outside entrance requires an aggressive *scraping*product that requires as little maintenance as possible.

Vestibule
Between the exterior and interior doors, choose a product that *scrapes* off soil and *absorbs* moisture.

Interior
In lobby areas, nylon fibers offer optimal performance for additional moisture absorption.

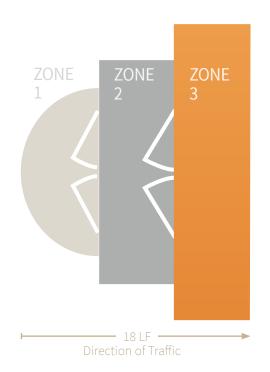

| PRODUCT | TRAFFIC LOAD | DUAL TREAD OPTION | ZONE 1^{\dagger} | zone 2 vestibule | ZONE 3 |
|-----------------------------------|-----------------------------------|----------------------|--------------------|---------------------|--------|
| MATrac™ Roll-Up Mat | Light | • | | • | • |
| MATdesign® Roll-Up Mat | Light | • | • | • | • |
| QuietFLEX® Roll-Up Mat | Light | • | • | • | • |
| GRATEdesign® Roll-Up Grille | Medium | • | • | • | • |
| MAXgrid™ Vinyl Mat | Medium - Heavy | | | • | • |
| MAXtread™ Vinyl Mat | Medium - Heavy | | • | • | • |
| EnvIRONtread II® Rigid Grille | Light - Medium, Medium - Heavy | | | • | • |
| GRATEdesign® Rigid Grille | Heavy | • | • | • | • |
| GRATEdesign® Architectural Grille | Heavy | | • | • | • |
| alumaGRIL™ Architectural Grille*‡ | Medium - Heavy | • | • | • | • |
| eleGRIL® Stainless Steel Grille* | Light, Medium | | • | • | • |
| proGRIL™ Architectural Grille* | Medium, Heavy | | • | • | • |

^{*}Not recommended for exterior snowy climates.

[†]Tread insert must also be rated for exterior use.

[‡]Dual tread available on plank and serrated only.

USGBC LEED Credit Contributions

ENTRANCE MATS + GRILLES



MR CREDIT 4, RECYCLED CONTENT

Post-consumer + ½, Pre-consumer content

MR CREDIT 5, REGIONAL MATERIAL

Use building materials or products that have been extracted, harvested or recovered, as well as manufactured, within 500 miles of the project site.

MR CREDIT 5, RAPIDLY RENEWABLE MATERIALS

Use rapidly renewable building materials and products for 2.5% of the total value of all building materials and products used in the project, based on cost. Rapidly renewable building materials and products are made from agricultural products that are typically harvested within a 10-year or shorter cycle.


IEQ CREDIT 4.3, LOW-EMITTING MATERIALS - FLOORING SYSTEMS

All carpet installed in the building interior must meet the testing and product requirements of the Carpet and Rug Institute Green Label Plus 1 program. All carpet adhesives must meet the requirements of IEQ Credit 4.1: Adhesives and Sealants, which includes a volatile organic compound (VOC) limit of 50 g/L.

IEQ CREDIT 5, POLLUTANT SOURCE CONTROL

Employ permanent entryway systems at least 10 feet long in the primary direction of travel to capture dirt and particulates entering the building at regularly used exterior entrances.

Acceptable entryway systems include: permanently installed grates, grilles and slotted systems that allow for cleaning underneath. Roll-out mats are acceptable only when maintained on a weekly basis by a contracted service organization.

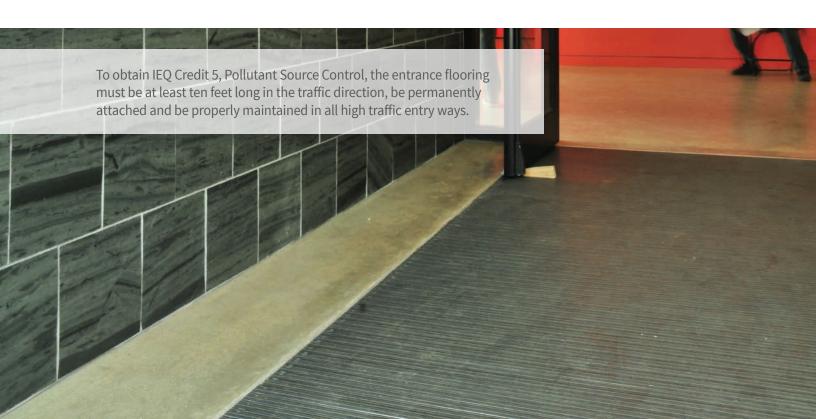



proGRIL™

STAINLESS STEEL ARCHITECTURAL GRILLE

Nystrom's new stainless steel proGRIL offers top-of-the-line elegance and symmetry that will make a statement of grandeur in any entry.

FEATURES

PREMIER PRODUCT Top-of-the-line stainless steel design for high-end buildings with entrances that make a statement of grandeur.

MECHANICALLY INTERLOCKED Design with a u-clip construction.

ARCHITECTURAL CURVES Available with optional curved wires for revolving doors and column designs.

ZONES 1+2

DETAILS

MATERIAL Stainless Steel, Type 304 or 316

DEPTH 3/4 inch or 1-1/8 inch

TREAD SPACING .3275 inch on center
TREAD DESIGN .140 inch profile bar
TREAD OPTIONS Straight or Curved Wire

FRAMES Level Bed

ROLLING LOAD 500 lbs/wheel

TREADS







Curved Wire

FRAMES



Level Bed, Mech. Fastened

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|---------------|----------|--------|---------|
| GP34S | Straight Wire | Scraping | 3/4" | Medium |
| GP34C | Curved Wire | Scraping | 3/4" | Medium |
| | | | | |
| GP98S | Straight Wire | Scraping | 1-1/8" | Heavy |
| GP98C | Curved Wire | Scraping | 1-1/8" | Heavy |

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|------------------------------|-----------------|---------|--------|
| FP34LBM | Level Bed, Mech. Fastened | Stainless Steel | 1/8" | 7/8" |
| FP98LBM | Level Bed, Mech. Fastened | Stainless Steel | 1/8" | 1-1/4" |

eleGRIL®

STAINLESS STEEL GRILLE


Nystrom's line of eleGRIL Stainless Steel Grilles are elegant and durable. This grille is most often used in high traffic venues as they stand up to extremely heavy pedestrian and rolling traffic.

FEATURES

GREAT SCRAPING ABILITY The grille treads scrape off debris from foot wear, the particles drop through the rails and is captured beneath.

WELDED V WIRE CONSTRUCTION All eleGRIL grilles are electronically welded to ensure strength and durability.

BEST FOR DRY AREAS Metals become slippery when wet. These grilles should be specified for interiors only in snowy climates.

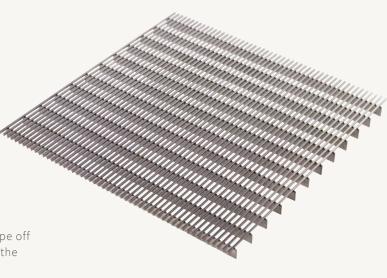

ZONES 1+2

DETAILS

MATERIAL Stainless Steel, Type 304 or 316

DEPTH % inch, % inch or 1-% inch **TREAD SPACING** .235 inch on center **TREAD** .090 inch welded "v" wire

FRAMES Level Bed, Deep Pit or Surface Mount

ROLLING LOAD 1000 lbs/wheel

TREADS







1-1/8 inch

FRAMES

3/8 inch



Surface



Level Bed, Cast-In



Level Bed, Mech. Fastened



Deep Pit, Mech. Fastened

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|--------|--------------------|----------|--------|---------|
| GE38SH | Stainless Steel | Scraping | 3/8" | Low |
| GE58SH | Stainless Steel | Scraping | 5/8" | Medium |
| GE98SH | Stainless Steel | Scraping | 1-1/8" | Heavy |

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|----------|---------------------------|-----------------|---------|---------|
| FE38SAMH | Surface | Aluminum | 1-5/8" | 15/32" |
| FE38LBCH | Level Bed, Cast-In | Stainless Steel | 1/8" | 9/16" |
| FE38LBMH | Level Bed, Mech. Fastened | Stainless Steel | 1/8" | 9/16" |
| | | | | |
| FE58LBCH | Level Bed, Cast-In | Stainless Steel | 1/8" | 3/4" |
| FE58LBMH | Level Bed, Mech. Fastened | Stainless Steel | 1/8" | 3/4" |
| | | _ | _ | _ |
| FE98LBCH | Level Bed, Cast-In | Stainless Steel | 1/8" | 1-1/4" |
| FE98LBMH | Level Bed, Mech. Fastened | Stainless Steel | 1/8" | 1-1/4" |
| FE98DAMH | Deep Pit, Mech. Fastened* | Stainless Steel | 1/8" | 3" - 7" |
| • | • | ••••• | • | |

alumaGRIL™

ARCHITECTURAL GRILLE

Nystrom's all aluminum Architectural Grille adds a sleek, clean and modular look to entrances. At a fraction of the price of stainless steel entrance grilles, these modular sections add style to any entrance.

FEATURES

ARCHITECTURAL BEAUTY Design a breathtaking entrance at a fraction of the cost of stainless steel.

EASY INSTALLATION Installation is a breeze as no tie downs are required. Simply place the modular sections into the frame.

MODULAR SECTIONS Each section is framed (as shown) for a stylish, modern design.



ZONES 1 - 3

DETAILS

MATERIAL Aluminum

DEPTH 1 inch

TREAD SPACING 3/16 inch between treads

TREAD DESIGN Waffle, Plank, Rectangular, Serrated

FRAMES Level Bed Cast-In or Drilled **ROLLING LOAD** 1200 lbs/wheel*

*Maximum grille section is 48 inches by 48 inches.

TREADS



Plank





Waffle

Rectangle





Serrated

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|-------------------|----------|-------|-----------------|
| | ½" Plank | Scraping | | Medium to Heavy |
| GL10S | ½" Serrated Plank | Scraping | 1" | Medium to Heavy |
| | ½" Waffle | Scraping | | Medium to Heavy |
| | ½" Rectangle | Scraping | | Medium to Heavy |
| | ³/16" Bar | | 1" | Medium to Heavy |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|-----------------------|----------|---------|--------|
| FL10LBC | Level Bed, Cast-In | Aluminum | 3/8" | 1-1/8" |
| FL10LBM | Level Bed, Drilled In | Aluminum | 3/8" | 1-1/8" |



Level Bed. Cast-In



Level Bed. Mech. Fastened



Nystrom's GRATEdesign Aluminum Architectural Grille offers a serrated tread that looks sleek and offers slip resistance.

FEATURES

STRONG AND SILENT This durable grille is constructed with I-beams for added strength and cushions to deaden sound.

STOP THE DIRT AT THE DOOR Protect your building floors from dirt and moisture with the use of entrance mats and grilles.

GREAT SCRAPING ABILITY The serrated treads scrape off debris from foot wear, the particles drop between the rails and are captured beneath.



1-1/2" serrated tread

shown

DETAILS

MATERIAL Aluminum

DEPTH 1-3/4 inch

TREAD SPACING 1-1/2 Width: 1-1/2 inch on center

TREAD OPTION 1-1/2 inch FRAMES Level Bed or Deep Pit ROLLING LOAD 1000 lbs/wheel

FRAMES



Level Bed.



3 inch Deep Pit.



4 inch Deep Pit,



Level Red Mech. Fastened

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|--------------------------|----------|--------|---------|
| GD74A | 1-3/4" Serrated Aluminum | Scraping | 1-3/4" | Heavy |

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------------------------|----------------------------------|----------------------------|------------|----------|
| | Level Bed, Cast-In | Aluminum | | 1-7/8" |
| ED74D4C | DZADAC Dana Dit Cont la Aluminum | Aluminum | 1/2" | 1-3/4" |
| FD74D4C Deep Pit, Cast-In | Atummum | 1/2" | 4-1/4" pit | |
| ED74D2C | FD74D3C Deep Pit, Cast-In | Aluminum | 1/2" | 2-13/16" |
| FD14D3C | Deep Pit, Cast-III | reep Pit, Cast-in Aluminum | | 3" pit |
| FD74LBM | Level Bed, Mech. Fastened | Aluminum | 1/8" | 1-7/8" |

GRATEdesign[®]

RIGID GRILLE

Nystrom's GRATEdesign Rigid Grille is sturdy and offers design flexibility and is effective in any type of high-traffic entrance.

FEATURES

DUAL TREADS The only grille in the industry to offer the design flexibility to mix and match treads.

STRONG AND SILENT This durable grille is constructed with I-beams for added strength and cushions to deaden sound.

STOP THE DIRT AT THE DOOR Protect your building floors from dirt and moisture with the use of entrance mats and grilles.



ZONES 1 - 3

DETAILS

MATERIAL Aluminum

DEPTH 1-3/4 inch

TREAD SPACING 1-1/2 inch on center

TREAD OPTIONS Single or Dual FRAMES Level Bed or Deep Pit ROLLING LOAD 1000 lbs/wheel

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|----------------|----------------------|--------|---------|
| GD74P | Premium Carpet | Absorbent & Scraping | 1-3/4" | Heavy |
| GD74R | Rugged Scrub | Scraping | 1-3/4" | Heavy |
| GD74V | Vinyl | Scraping | 1-3/4" | Heavy |
| GD74U | Ribbed Rubber | Scraping | 1-3/4" | Heavy |
| GD74E | EcoTread | Slip Resistant | 1-3/4" | Heavy |
| GD74G | Vinyl Abrasive | Slip Resistant | 1-3/4" | Heavy |
| GD74B | Brush | Scraping | 1-3/4" | Heavy |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------------------------|---------------------------------|----------|---------|------------|
| | Level Bed, Cast-In | Aluminum | 1/2" | 1-7/8" |
| ED74D4C | AD4C Deep Pit, Cast-In Aluminum | 1/2" | 1-3/4" | |
| | | , | 1/2" | 4-1/4" pit |
| ED74D2C | | Aluminum | 1/2" | 2-13/16" |
| FD74D3C Deep Pit, Cast-In | Atummum | 1/2" | 3" pit | |
| | Level Bed,Mech. Fastened | | | 1-7/8" |

TREAD INSERTS



Premium Carpet



Rugged Scrub





Ribbed Rubber



EcoTread™



Vinyl Abrasive Insert



Brush



FRAMES



Level Bed. Cast-In



3 inch Deep Pit,





Level Red Mech. Fastened



EnvIRONtreadII®

RIGID GRILLE

Nystrom's EnvIRONtreadII Rigid Grille is constructed of recycled, reversible, and sustainable materials and is effective in any type of high-traffic entrance.

FEATURES

RECYCLED Minimum of 59% post-consumer and 29% of pre-consumer recycled content. Buffed nylon-reinforced truck and airplane tire strips.

REVERSIBLE Double sided treads make symmetrical grilles perfectly reversible. Just flip over to increase product life.

RELIABLE Buffing the fibers out of used tires creates tread strips with an attractive velvety surface that allows the inserts to maintain their new appearance over time.

ZONES 2 - 3

Interior Only

DETAILS

MATERIAL Aluminum

DEPTH 11/16 inch or 15/32 inch

TREAD SPACING

• Single Tread: 1-1/8 inch on center • Double Tread: 1-11/16 inch on center

TREAD OPTIONS Closed

FRAMES Level Bed or Surface Mount **ROLLING LOAD** 1500 lbs/wheel

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|-----------------|----------------------|--------|--------------------|
| GV34 | envIRONtreadII® | Absorbent & Scraping | 11/16" | Medium to Heavy |
| GV12 | envIRONtreadII® | Absorbent & Scraping | 15/32" | Light to Medium |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|-------|-------------------------------|----------|---------|--------|
| | Level Bed, Cast-In | Aluminum | . – | 1-3/8" |
| | Level Bed, Mech. Fastened | Aluminum | | 3/4" |
| | Level Bed, Cast-In | Aluminum | | 5/8" |
| | Surface Mount, Mech. Fastened | | - | 15/32" |

TREAD OPTIONS





Sinale Closed Tread

Double Closed Tread







Level Bed. Mech. Fastened



Surface Mount. Mech. Fastened

GRATEdesign®

ROLL-UP GRILLE

Nystrom's GRATEdesign roll-up grille is constructed of hollow extrusion rails joined by low-density polyethylene (LDPE) hinge. The cushion retained in the captive aluminum tread port, along with drainage holes, allows debris and moisture to flow through the grille.

FEATURES

DUAL TREADS FOR DUAL PURPOSE Now offering the design flexibility to mix and match treads. Simply select treads for absorption, scraping or slip resistance.

PVC FREE HINGES Our PVC free, LDPE hinges raise the industry bar for performance in both flexibility and durability. Insist on LDPE hinges!

ROLL BACK FOR EASY CLEANING Easily maintain your entry system by rolling back the grille for regular sweeping or vacuuming to extend the life of your system.



ZONES 1 - 3

DETAILS

RAIL MATERIAL Aluminum

DEPTH 3/4 inch

TREAD SPACING 1-1/2 inches on center

TREAD OPTIONS Single or Dual

FRAMES Level Bed

ROLLING LOAD 1000 lbs/wheel

GRILLE

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|----------------|----------------------|-------|---------|
| GR34P | Premium Carpet | Absorbent & Scraping | 3/4" | Medium |
| GR34R | Rugged Scrub | Scraping | 3/4" | Medium |
| GR34V | Vinyl | Scraping | 3/4" | Medium |
| GR34U | Ribbed Rubber | Scraping | 3/4" | Medium |
| GR34E | EcoTread | Slip Resistant | 3/4" | Medium |
| GR34G | Vinyl Abrasive | Slip Resistant | 3/4" | Medium |
| GR34B | Brush | Scraping | 3/4" | Medium |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|---------------------------|----------|---------|--------|
| | Level Bed, Cast-In | Aluminum | 1/2" | 1-3/8" |
| FR34LBM | Level Bed, Mech. Fastened | Aluminum | 1/8" | 3/4" |

TREAD INSERTS







Rugged Scrub





Ribbed Ruhher



EcoTread™



Vinyl Abrasive Insert



Brush



Level Red Cast-In



Level Red Mech. Fastened



QuietFLEX®

ROLL-UP MAT

Nystrom's QuietFLEX roll-up mat is constructed of LDPE hinges to reduce traffic noise. The lightweight aluminum rails make this mat easy to roll back for routine maintenance.

FEATURES

DESIGNED TO BE QUIET Lightweight rails, LDPE hinges and a wide range of tread insert options make this an ideal mat for any interior entry with light to medium traffic.

ROLL BACK FOR EASY CLEANING Proper maintenance extends the life of your entry system. Regular vacuuming is necessary for all 3/8 inch deep mats.

DUAL TREADS FOR DUAL PURPOSE Now offering the design flexibility to mix and match treads. Simply select treads for absorption, scraping or slip resistance.

ZONES 1 - 3

DETAILS

MATERIAL Aluminum

DEPTH % inch

TREAD SPACING 2 inches on center

TREAD OPTIONS Single or Dual

FRAMES Level Bed or Surface Mount

ROLLING LOAD 300 lbs/wheel

MAT

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|-------------------|----------------------|-------|---------|
| MQ38P | Premium Carpet | Absorbent & Scraping | 3/8" | Light |
| MQ38R | Rugged Scrub | Scraping | 3/8" | Light |
| MQ38V | Vinyl | Scraping | 3/8" | Light |
| MQ38U | Ribbed Rubber | Scraping | 3/8" | Light |
| MQ38E | EcoTread | Slip Resistant | 3/8" | Light |
| MQ38G | Vinyl Abrasive | Slip Resistant | 3/8" | Light |
| MQ38A | Serrated Aluminum | Scraping | 3/8" | Light |
| MQ38B | Brush | Scraping | 3/8" | Light |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|-------------------------------|----------|---------|-------------------|
| FQ38LBC | Level Bed, Cast-In | Aluminum | 1/2" | 1-3/8" |
| FQ38SAM | Surface Mount, Mech. Fastened | Aluminum | 1-5/8" | 3/8" |
| FQ38SV | Surface Mount, Mat Attached | Vinyl | 1-5/8" | 3/8" |
| - | Level Bed, Mech. Fastened | Aluminum | , - | ⁷ /16" |

TREAD INSERTS



Premium Carnet



Rugged Scrub



Vinyl



Ribbed Rubber



EcoTread™



Vinyl Abrasive Insert



Serrated Aluminum



Brush



Level Bed. Cast-In



Surface Mount, Mech. Fastened



Surface. Mat Attached



Level Bed. Mech. Fastened

MATdesign[®]

ROLL-UP MAT

Nystrom's MATdesign Roll-Up Mat is engineered with aluminum rails, ball and socket aluminum hinges and drain holes to allow debris and moisture to flow through the mat.

FEATURES

ECONOMICAL Strong, durable aluminum rails offer a long-lasting entrance flooring solution at an affordable price.

DUAL TREADS FOR DUAL PURPOSE Now offering the design flexibility to mix and match treads. Simply select treads for absorption, scraping or slip resistance.

ROLL BACK FOR EASY CLEANING Proper maintenance extends the life of your entry system. Regular vacuuming is necessary for all 3/8 inch deep mats.



ZONES 1 - 3

DETAILS

MATERIAL Aluminum

DEPTH 3/8 inch

TREAD SPACING 2 inches on center FRAMES Level Bed or Surface Mount **ROLLING LOAD** 350 lbs/wheel

MAT

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|----------------|----------------------|-------|---------|
| MD38P | Premium Carpet | Absorbent & Scraping | 3/8" | Light |
| MD38R | Rugged Scrub | Scraping | 3/8" | Light |
| MD38V | Vinyl | Scraping | 3/8" | Light |
| MD38U | Ribbed Rubber | Scraping | 3/8" | Light |
| MD38E | EcoTread | Slip Resistant | 3/8" | Light |
| MD38G | Vinyl Abrasive | Slip Resistant | 3/8" | Light |
| MD38B | Brush | Scraping | 3/8" | Light |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|-------------------------------|----------|---------|--------|
| FD38LBC | Level Bed, Cast-In | Aluminum | 1/2" | 1-3/8" |
| FD38SAM | Surface Mount, Mech. Fastened | Aluminum | 1-5/8" | 3/8" |
| FD38LBM | Level Bed, Mech. Fastened | Aluminum | 1/8" | 7/16" |

TREAD INSERTS



Premium

Rugged Scrub





Ribbed Rubber



EcoTread™



Vinyl Abrasive Insert



Brush



Level Bed. Cast-In



Surface Mount, Mech. Fastened



Level Bed. Mech. Fastened



MATrac[™]

ROLL-UP MAT

Nystrom's new sleek vinyl roll-up mat is the most economical to the market. Ideal for low traffic and retrofit applications, this lightweight mat is a perfect solution for tight budgets.

FEATURES

LIGHTWEIGHT & EASY INSTALLATION The mat is lightweight and can easily be installed by one person, making the process quick and practically pain-free.

SIMPLE, ELEGANT DESIGN The streamlined black rails add a touch of refinement at an affordable price.

DUAL TREADS FOR DUAL PURPOSE Now offering the design flexibility to mix and match treads. Simply select treads for absorption, scraping or slip resistance.

ZONES 2 - 3

Interior Only

DETAILS

MATERIAL Vinyl **DEPTH** % inch

TREAD SPACING 1-7/8 inch on center FRAMES Level Bed or Surface Mount **ROLLING LOAD** 350 lbs/wheel

MAT

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|----------------|----------------------|-------|---------|
| MT38P | Premium Carpet | Absorbent & Scraping | 3/8" | Light |
| MT38R | Rugged Scrub | Scraping | 3/8" | Light |
| MT38U | Ribbed Rubber | Scraping | 3/8" | Light |
| MT38E | EcoTread | Slip Resistant | 3/8" | Light |
| MT38G | Vinyl Abrasive | Slip Resistant | 3/8" | Light |
| MT38B | Brush | Scraping | 3/8" | Light |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|---------------------------|----------|---------|--------|
| FT38SV | Surface | Vinyl | 1-5/8" | 3/8" |
| FT38SAM | Surface | Aluminum | 1-5/8" | 3/8" |
| FT38LBC | Level Bed | Aluminum | 1/2" | 1-3/8" |
| FT38LBM | Level Bed, Mech. Fastened | Aluminum | 1/8" | 7/16" |

TREAD INSERTS



Premium Carpet



Rugged Scrub



Ribbed Rubber



EcoTread™



Vinyl Abrasive Insert



Brush



Level Bed. Cast-In



Surface Mount. Mech. Fastened



Surface. Mat Attached



Level Bed. Mech. Fastened

MAXtread™

VINYL MAT

Nystrom's new MAXtread is a flexible, open weave, vinyl mat with carpet inlays. This system will trap dirt, snow and sand while retaining the debris within the grid and can be easily rolled back for cleaning. Ideal for retail applications with heavy pedestrian traffic.

FEATURES

HINGE-FREE, **NOISE-FREE** The injection molded mats are fused together to form a flexible mat. The flexible PVC can be rolled back for easy cleaning.

PATENTED HOLD-DOWN SYSTEM The mats are secured in place with a unique, hidden, retainer system. Engineered for easy installation and removal for cleaning.

HEAVY-DUTY, HIGH TRAFFIC The combination of the deep well, and the open weave dsign, creates a large debris collection area; necessary for high pedestrian traffic.



ZONES 1 - 3

DETAILS

MATERIAL Vinyl **DEPTH** ½ inch

TREAD SPACING 2-1/4 inches on center

TREAD OPTIONS Polypropylene Carpet with hook and loop (replaceable) or glued (permanent) attachment

FRAME Level Bed or Surface Mount ROLLING LOAD 1200 lbs/wheel

MAT

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|---------------------------|----------|-------|-----------------|
| MX12H | Poly Carpet, Hook & Loop* | Scraping | 1/2" | Medium to Heavy |
| MX12Z | Poly Carpet, Glued | Scraping | 1/2" | Medium to Heavy |

*Replaceable carpet

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|---|----------|---------|-------|
| FX12SV | Surface | Vinyl | 2-3/4" | 1/2" |
| FX12SAM | Surface | Aluminum | _ | 1/2" |
| FX12LCH | Level Bed, Mech. Fastened Channel | Aluminum | , . | 1/2" |
| FX12LTR | Level Bed, Mech. Fastened Transition | Aluminum | | 1/2" |
| FX12LTO | Level Bed, Mech. Fastened Transition with Overhang | Aluminum | _ | 1/2" |

TREADS



(Permanent)



Hook & Loop (Replaceable)

ATTACHMENT



Lockdown



Surface. Vinyl



Surface. Aluminum




Level Bed. Mech. Fastened Channel



Level Bed. Mech. Fastened Transition



Level Bed, Mech. Fastened Transition with Overhang

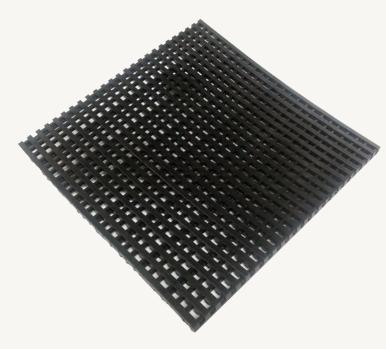

ZONES 1 - 3

MAXgrid™

VINYL MAT

Nystrom's new MAXgrid is a flexible, open weave, vinyl mat. The patented grid rib system is heel resistant. This system will trap dirt and sand while retaining the debris within the grid. Easily roll back the mat for cleaning. Ideal for retail applications with heavy pedestrian traffic.

FEATURES

HINGE-FREE, **NOISE-FREE** The injection molded mats are fused together to form a flexible mat. The flexible PVC can be rolled back for easy cleaning.

PATENTED HOLD-DOWN SYSTEM The mats are secured in place with a unique, hidden, retainer system. Engineered for easy installation and removal for cleaning.

HEAVY-DUTY, HIGH TRAFFIC The combination of the deep well, and the open weave dsign, creates a large debris collection area; necessary for high pedestrian traffic.

DETAILS

MATERIAL Vinyl **DEPTH** ½ inch

TREAD SPACING 3/4 inch on center

TREAD OPTIONS Vinyl Rails

FRAME Level Bed or Surface Mount ROLLING LOAD 1200 lbs/wheel

MAT

| MODEL | TREAD | FUNCTION | DEPTH | TRAFFIC |
|-------|-------|----------|-------|-----------------|
| MG12 | Vinyl | Scraping | 1/2" | Medium to Heavy |

FRAME

| MODEL | MOUNTING | MATERIAL | PROFILE | DEPTH |
|---------|---|----------|---------|-------|
| FG12SV | Surface | Vinyl | 2-3/4" | 1/2" |
| FG12SAM | Surface | Aluminum | _ | 1/2" |
| FG12LCH | Level Bed, Mech. Fastened Channel | Aluminum | 3/4" | 1/2" |
| FG12LTR | Level Bed, Mech. Fastened Transition | Aluminum | | 1/2" |
| FG12LTO | Level Bed, Mech. Fastened Transition with Overhang | Aluminum | 1" | 1/2" |

ATTACHMENT



Lockdown







Surface. Aluminum



Level Bed. Mech. Fastened Channel



Level Bed. Mech. Fastened Transition



Level Bed. Mech. Fastened Transition with Overhang

Color Anodizing

Color anodizing is available for all aluminum frames and for the following aluminum rails: GRATEdesign, MATdesign, QuietFLEX and alumaGRIL.



Dual Treads

Nystrom now offers dual treads on mats and grilles. Dual treads offer design flexibility to mix and match treads, and to offer both absorbant and scraping treads in one system.

AVAILABLE SYSTEMS INCLUDE

GRATEdesign® Rigid Grille GRATEdesign® Roll-Up Grille QuietFLEX® Roll-Up Mat MATdesign™ Roll-Up Mat MATrac™ Roll-Up Mat

| PRIMARY TREAD | SECOND TREAD |
|----------------|--|
| PREMIUM CARPET | EcoTread Vinyl Ribbed Rubber Abrasive Insert Serrated Aluminum* Brush |
| RUGGED SCRUB | EcoTread Vinyl Ribbed Rubber Abrasive Insert Serrated Aluminum* Brush |



^{*}Not available for MATdesign Roll-Up Mat and GRATEdesign Roll-Up Grille.

Sandbar Espresso Smoke Slate Chrome Wrought Iron Castle Gray Gun Metal Graphite Fern Denim

Premium Carpet

COLOR OPTIONS

Nystrom uses the highest-quality carpet available for our mats and grilles.

CONSTRUCTION Carpet fibers are 3700 denier solution-dyed woven nylon and shall include a minimum of 100 10 ml mono filament fibers per square inch. Carpet weight shall be 33 oz. per square yard.

| APPLICATION | FUNCTION |
|-------------|----------------------|
| INTERIOR | Absorbent & Scraping |





Rugged Scrub COLOR OPTIONS

This rugged carpet alternative is perfect for heavy-duty applications, is easy to maintain and the ideal solution for exterior and interior applications.

CONSTRUCTION 600 denier, solution-dyed polypropylene, tufted.

| INTERIOR/EXTERIOR | Absorbent & Scraping |
|-------------------|----------------------|
| APPLICATION | FUNCTION |

$EcoTread^{TM}$

COLOR OPTIONS

Recycled rubber with EPDM backing. Provides a minimum of 64% post-consumer, 5.5% pre-consumer recycled content.

STANDARD COLOR Midnight black

| APPLICATION | FUNCTION |
|-------------------|----------------|
| INTERIOR/EXTERIOR | Slip Resistant |

EnvIRONtreadII®

COLOR OPTIONS

Constructed of truck and airplane tire strips, EnvIRONtreadII lasts longer than other textile entrance mats and grilles.

STANDARD COLOR Gray. Black may carry an additional charge.

NOTE Due to the recycled contents, there may be a significant color variation in this product.

| APPLICATION | FUNCTION |
|-------------|----------------------|
| INTERIOR | Absorbent & Scraping |





Black Gray

Ribbed Rubber

COLOR OPTIONS

The new dual durometer, TPV rubber tread is ideal for interior/exterior areas where moisture absorbency is not required.

CONSTRUCTION Vinyl base and a TPV, PVC-free, convex shaped tread with continuous serrations.

| INTERIOR/EXTERIOR | Scraping |
|-------------------|----------|
| APPLICATION | FUNCTION |



Black

Vinyl **COLOR OPTIONS**

Use vinyl in high-traffic, interior areas where moisture absorbency is not required.

CONSTRUCTION Extruded vinyl convex shape, continuous serrations.

| APPLICATION | FUNCTION |
|-------------------|----------|
| INTERIOR/EXTERIOR | Scraping |







Beige





Dark Brown



Abrasive Insert

COLOR OPTIONS

Use abrasive inserts in interior areas where slip resistance is critical.

CONSTRUCTION Flexible abrasive bonded to a rigid bio-based/recycled plastic tread insert.

| APPLICATION | FUNCTION |
|-------------|----------------|
| INTERIOR | Slip Resistant |







Brick Red

Dark Brown

Ocean Gray



Safety Yellow

Flat Black

Serrated Aluminum Brush

COLOR OPTIONS

Use serrated aluminum in interior areas where scraping is critical.

CONSTRUCTION Serrated aluminum, mill finish.

| APPLICATION | FUNCTION |
|-------------------|----------|
| INTERIOR/EXTERIOR | Scraping |



Mill

COLOR OPTIONS

Nystrom's new rugged, brush is a premier scraping tread, ideal for snowy northern climates.

CONSTRUCTION Brush tread insert is constructed of rigid nylon bristles, 9 tufts per inch, each tuft contains 80 bristles.

| INTERIOR/EXTERIOR | Scraping |
|-------------------|----------|
| APPLICATION | FUNCTION |



Black

Polyester Carpet

COLOR OPTIONS

For MAXtread systems only. Use polyester carpet in interior or exterior areas where moisture removal and scraping is critical.

CONSTRUCTION Crimped solution-dyed 2750 denier polypropylene fibers tufted into a woven double backing and glued tread rails. Carpet weigh shall be 26

| APPLICATION FUNCTION | INTERIOR/ EXTERIOR | Absorbent & Scraping |
|----------------------|--------------------|----------------------|
| | APPLICATION | FUNCTION |







Vinyl Mat

COLOR OPTIONS

Use vinyl grilles in interior areas where scraping is

CONSTRUCTION Injection molded Polyvinyl Chloride (PVC).

| APPLICATION | FUNCTION Scraping |
|-------------------|----------------------|
| INTERIOR/EXTERIOR | |







Brown

Visit nystrom.com for the latest version of this document and more information.



9300 73rd Avenue North Minneapolis, MN 55428

Phone (800) 547-2635 Fax (866) 900-1959

info@nystrom.com





