

Elastomeric

EXTERIOR WALL SYSTEM (EW/EWN)



This Elastomeric Exterior Wall System is a weather tight system that accommodates thermal and seismic movement. The visual seal matches many exterior building colors and the rear moisture barrier prevents exterior moisture or condensation from entering the wall cavity.

FEATURES

COLOR COORDINATION Available in four elastomeric seal color options: beige, white, gray or black.

WEATHER TIGHT The combination of the visual seal and moisture barrier ensures the elements are kept outside.

INTEGRATED MOISTURE BARRIER Assembly of the moisture barrier is simplified with internal logs.

DETAILS

MATERIAL 6063-T6 Aluminum

FINISH Mill

MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

MOUNTING Recess

JOINT SIZE 2 inches to 24 inches


LENGTH 10 Linear Feet

APPLICATION Exterior

INSTALLATION Wall

OPTIONS Seal Color, Fire Barrier

SEAL COLORS

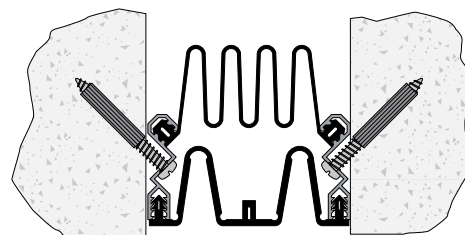

MODELS

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
EWN-200MB	Wall-to-Wall	2" (51mm)	2" (51mm)	2.63" (67mm)
EWN-300MB	Wall-to-Wall	3" (76mm)	3" (76mm)	5.13" (130mm)
EWN-400MB	Wall-to-Wall	4" (102mm)	4" (102mm)	4.75" (121mm)
EWN-500MB	Wall-to-Wall	5" (127mm)	5" (127mm)	6.75" (171mm)
EWN-600MB	Wall-to-Wall	6" (152mm)	6" (152mm)	9.5" (241mm)
EW-800MB	Wall-to-Wall	8" (203mm)	8" (203mm)	9.63" (245mm)
EW-900MB	Wall-to-Wall	9" (229mm)	9" (229mm)	15.38" (391mm)

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
EW-1000MB	Wall-to-Wall	10" (254mm)	10" (254mm)	13.63" (346mm)
EW-1200MB	Wall-to-Wall	12" (305mm)	12" (305mm)	19.13" (486mm)
EW-1500MB	Wall-to-Wall	15" (381mm)	15" (381mm)	20.25" (514mm)
EW-1600MB	Wall-to-Wall	16" (406mm)	16" (406mm)	19" (483mm)
EW-1800MB	Wall-to-Wall	18" (457mm)	18" (457mm)	28.5" (724mm)
EW-2000MB	Wall-to-Wall	20" (508mm)	20" (508mm)	27" (686mm)
EW-2400MB	Wall-to-Wall	24" (610mm)	24" (610mm)	38" (965mm)