


Existing Opening

FLOOR DOOR, 300PSF

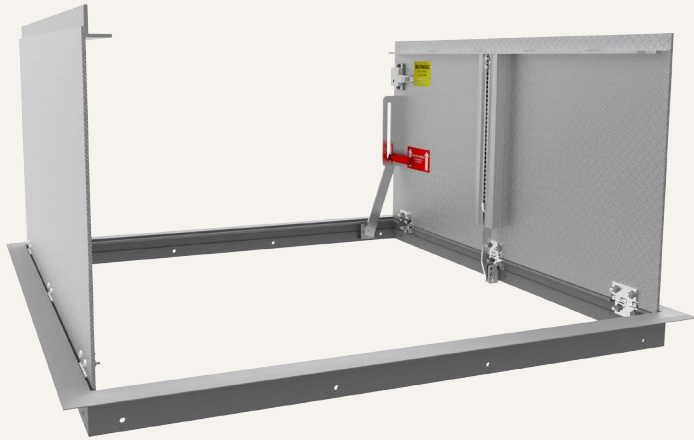

The Existing Opening Floor Door is designed for retrofit applications and is constructed with an angle frame. While providing a quality, economical option this is ideal for areas where water or moisture intrusion is not a concern.

FEATURES

PEDESTRIAN LOAD Designed for standard duty loads and tested up to 300psf live load in interior areas.

MATERIAL OPTIONS Upgrade the material to steel for added strength and durability or stainless steel for areas where corrosion is a concern.

DETAILS

LOAD 300 psf live load

MATERIAL Aluminum: 1/4 inch, mill finish with gray primer on exterior frame

COVER Diamond tread plate

FRAME Angle

INSTALLATION Bolt-in

SPRING Enclosed coil, Type 17-7 Stainless Steel


HINGES Heavy-duty Type 316 Stainless Steel

HOLD OPEN ARM Type 316 Stainless Steel, automatic, locks cover in open position

LATCH Slam latch, Type 316 Stainless Steel, with inside lever handle, includes removable threaded plug and key


GASKET Gasket around frame perimeter

MATERIALS



Aluminum

INSTALLATION



Bolt-in

ORDER GUIDE

MODEL	WIDTH	X	LENGTH	COVER	FL	-	OPTIONS
FDEPA		X					
	Standard Sizes (W x L)						
	Single Leaf		Double Leaf				
	24" x 24"		48" x 48"	S Single Door			Locks
	30" x 36"		48" x 72"	D Double Door			Finishes
	36" x 36"		60" x 60"				Operation
	42" x 42"						Safety
							Skirting
							Other