


Single Wing Hinged

FLOORING INFILL SYSTEM (FA)

The Single Wing Hinged Flooring Infill System is designed with a hinged cover to accommodate horizontal and vertical thermal movement. This surface mounted system is designed to integrate with carpet and VCT flooring and provides a minimal sight line.

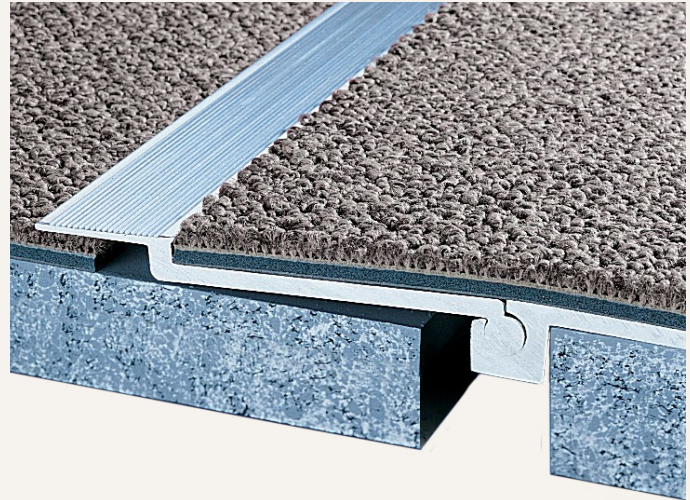

FEATURES

HINGED DESIGN Constructed with a single wing, hinged design to allow for limited vertical movement.

INTEGRATED FLOORING Designed to coordinate with main flooring material and accepts floor infill.

SURFACE MOUNT No block out is required. Simply screw onto subfloor.

DETAILS

MATERIAL 6063-T6 Aluminum

FINISH Mill

MOVEMENT

- Thermal: Horizontal and Vertical

MOUNTING Surface


JOINT SIZE 3 inches

LENGTH 10 Linear Feet

LOAD Pedestrian and Light Cart

INSTALLATION Floor

OPTIONS Moisture Barrier, Fire Barrier

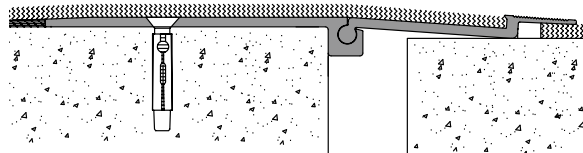

MODELS

MODEL	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT-LINE	FLOOR INFILL HEIGHT	MOVEMENT
FA150-125	3" (75mm)	1.5" (38mm)	0.125" (3mm)	1" (25mm)
FA150-250	3" (75mm)	1.5" (38mm)	0.25" (6mm)	1" (25mm)
FA150-375	3" (75mm)	1.5" (38mm)	0.375" (10mm)	1" (25mm)