


Safety Grating

FALL PROTECTION

Nystrom's newly redesigned OSHA compliant Safety Grating provides a permanent means of fall protection under floor doors and allows maintenance professionals and workers access in underground areas. Designed with a 6 inch opening for maintenance access. It is available as a factory installed option with most floor door styles.

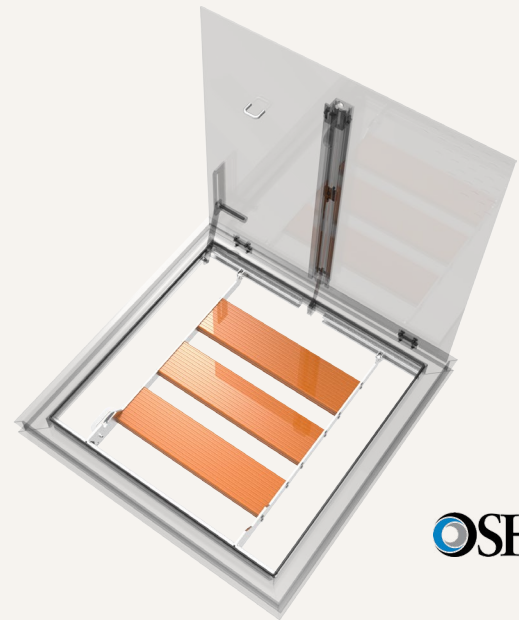

DETAILS

LOAD 300psf live load

MATERIAL

- Aluminum: extruded, 6 inch by 1/4 inch serrated plate, powder coat
- Plastic: fiber reinforced (FRP), yellow

HOLD OPEN LATCH Stainless steel with padlock hasp

COMPLIANCE OSHA 29 CFR1926.502(c)


ORDER GUIDE

MODEL	MATERIAL
-SG	
	T Aluminum, Orange Powder Coat
	YT Yellow, Fiber Reinforced Plastic

Safety Nets

FALL PROTECTION

Nystrom's Safety Net is designed to be installed in floor door openings to reduce risks associated with falls. The safety net easily slides on guide rails to facilitate entry and then repositioned to prevent fall through. This system also prevents objects from falling through the opening onto people below.

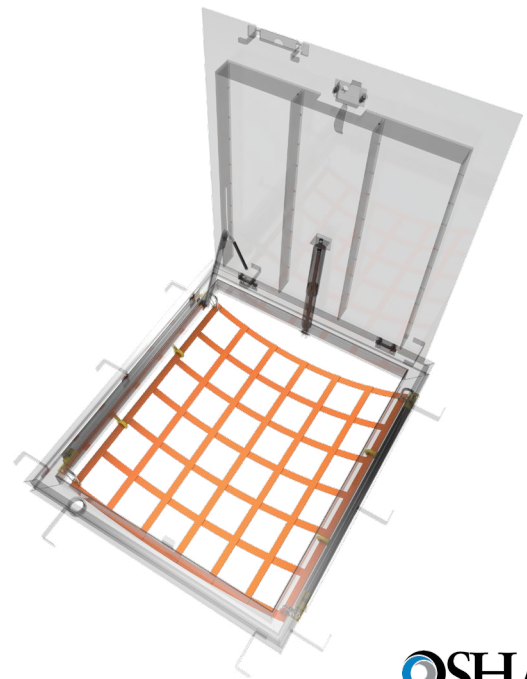

DETAILS

LOAD 5000 lb breaking strength

MATERIAL

- Rail: Extruded aluminum 6061 T6
- Netting: Nylon webbing
- Rings: Aluminum alloy

INSTALLATION

- New Construction: 1/2 inch nuts and bolts
- Retrofit: 1/2 inch wedge-style concrete anchors

COMPLIANCE OSHA 29 CFR1926.502(c)



Drainable frame only



Retrofit or non-drainable frame

ORDER GUIDE

MODEL	WIDTH	X	LENGTH	INSTALL
SN		X		-
A Aluminum	Standard Sizes (W x L)			R Retrofit
S Stainless Steel	36" x 30"	48" x 60"	48" x 48"	