

GL10B

· ·				
QTY.	MODEL	WIDTH	LENGTH	LOCATION


RECESS OPENING DIMENSIONS:

_____ WIDTH X _____ LENGTH

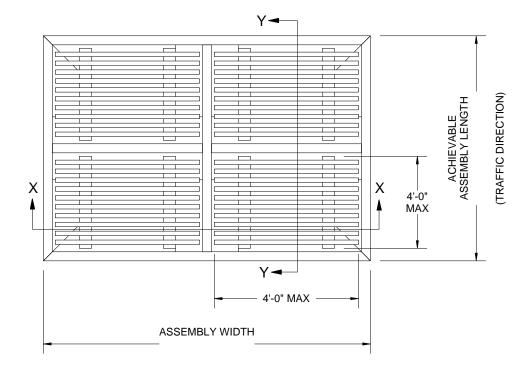

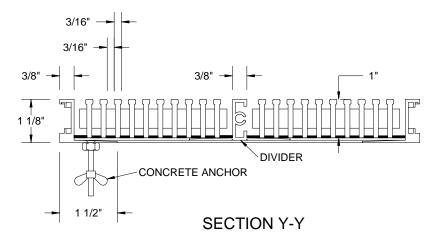

В

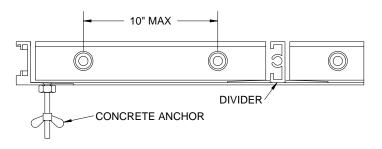

SECTION X-X

NOTES:

Α

В

- MAXIMUM GRATE SECTION SIZE NOT TO EXCEED 48" X 48"
 GRATE MUST BE INSTALLED IN A LEVEL BED RECESS
- RAILS ARE 6061-T6 ALUMINUM ALLOY; FRAMES ARE 6063-T6 ALUMINUM ALLOY
- TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION
- DESIGN CLEARANCE BETWEEN GRATE AND FRAME IS 1/8"
- ACTUAL ACHIEVEABLE GRATE LENGTH IS DEPENDANT ON BOTH NUMBER AND SIZE OF SECTIONS
- SITE OPENING LENGTH MUST BE ADJUSTED TO GRATE AND FRAME ACHIEVABLE LENGTH
- ADDITIONAL INFORMATION CAN BE FOUND IN THE PRODUCT SPECIFICATION AND IS CONSIDERED PART OF THIS TRANSMITTAL

PROJECT: ARCHITECT: CONTRACTOR: RAIL: GL10B FRAME: FL10LBC TITLE: AlumaGRIL Grate Level Bed Cast In Frame 3/16" Wide Rail 9300 73rd Avenue North Minneapolis, MN 55428 NAME DATE SIZE DWG. NO. REV Nystrom EFS GL10B-LBC ShpDr Α Α DRAWN 01/12/18 RELEASED DT WEIGHT: SHEET 1 OF 1 01/12/18

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

2

1