


# Fire Barrier

## COMPRESSION SYSTEM (HTS/VTS)

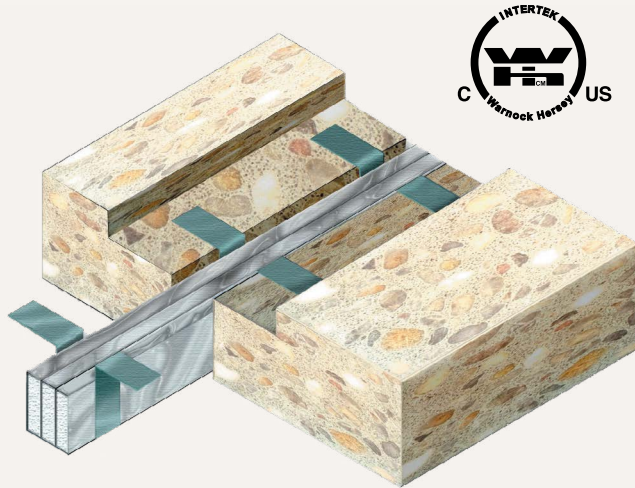

This Fire Barrier Compression System is recommended for nominal openings with thermal movement both vertical and horizontal application. This system is meant for openings with a maximum of 4 inches nominal.

### FEATURES

**FIRE-RATED** Warnock-Hersey listed fire barrier - constructed of fire retardant materials to contain fires from spreading thru joint openings.

**LIGHTWEIGHT** No metal flanges on this compression seal fire barrier reducing the overall weight.

**QUICK SHIP** Shorter lead time than most fire barriers, reduces wait time in the field.

### DETAILS

#### MOVEMENT

- Thermal: Horizontal and Vertical

**MOUNTING** Recessed

**JOINT SIZE** 1 inch to 4 inches

**LENGTH** 25 linear foot rolls


**FIRE-RATING** 2 hour

**APPLICATION** Interior

**INSTALLATION** Horizontal or Vertical

**COMPLIANCE** ASTM E119, UL 263, NFPA 251

**OPTIONS** 3-Hour Fire-Rating (horizontal only)

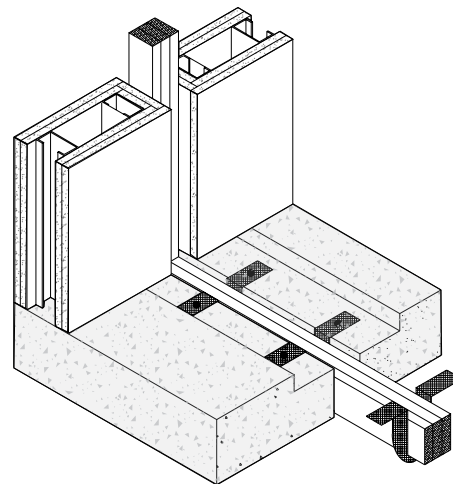

### MODELS

#### HORIZONTAL

MODEL	JOINT SIZE AT MEAN T°F	FIRE-RATING
HTS-1-2	1" (25mm)	2-Hour
HTS-2-2	2" (51mm)	
HTS-3-2	3" (76mm)	
HTS-4-2	4" (102mm)	

#### VERTICAL

MODEL	JOINT SIZE AT MEAN T°F	FIRE-RATING
VTS-1-2	1" (25mm)	2-Hour
VTS-2-2	2" (51mm)	
VTS-3-2	3" (76mm)	
VTS-4-2	4" (102mm)	