


Elastomeric

CORRIDOR SYSTEM (LCWF)

Nystrom's Elastomeric Corridor System limits the sight line of the expansion joint by mounting inside the joint opening. Available in a variety of attachment solutions for various applications with standard santoprene color selection to match your surrounding substrate and finish material.

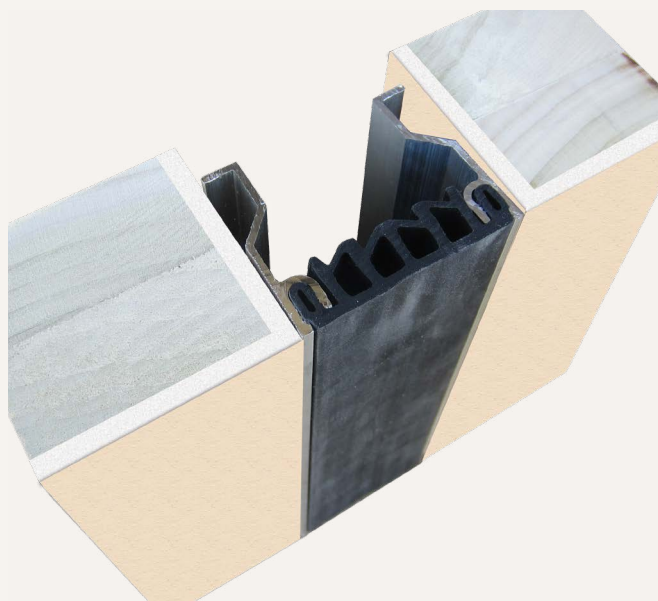

FEATURES

COMPLEMENTARY SEAL COLORS Available in four elastomeric seal color options: beige, white, gray or black.

QUICKER INSTALLATION Reduce installation time and labor costs with fast and easy installation.

CONTINUOUS SIGHT LINE This system can be used on walls, ceilings and corners to provide seamless and continuous aesthetics.

DETAILS

MATERIAL 6063-T6 Aluminum with Rubber Seal

FINISH Mill

MOVEMENT

- Thermal: Horizontal

MOUNTING Flush

JOINT SIZE 1 inch to 2 inches

SEAL LENGTH Continuous

APPLICATION Interior

INSTALLATION Wall or Ceiling

OPTIONS Seal Color, Moisture Barrier, Fire Barrier

SEAL COLORS



Beige


White

Gray

Black

MODELS

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
LCWF-100	Wall-to-Wall or Wall/Ceiling Corner	1" (25mm)	1" (25mm)	0.5" (13mm)
LCWF-200	Wall-to-Wall or Wall/Ceiling Corner	2" (51mm)	2" (51mm)	1" (25mm)

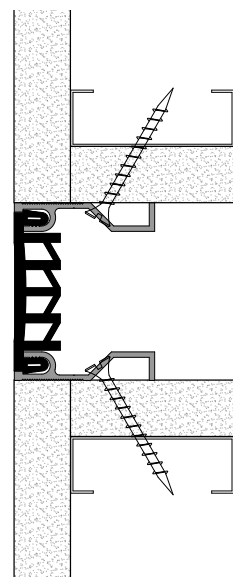

Wall-to-Wall