

Seismic Glide

FLOORING INFILL SYSTEM (NBR/W)



Nystrom's Seismic flooring infill systems is designed to accept most traditional Floor Systems and allow for multi-directional thermal movement, yet minimize the sight-line when installed.

FEATURES

EASIER INSTALLATION The beveled edge relief on the extrusion virtually eliminates any need to remove concrete from the block-out.

FLOORING INFILL Designed with a recess for vinyl, carpet or tile (VCT) flooring to cover the aluminum plate and reduce the overall sight-line.

COORDINATING CORNERS Available with corner option for a complete floor solution.

DETAILS

MATERIAL 6063-T6 Aluminum

FINISH Mill

MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

MOUNTING Block Out

JOINT SIZE 1 inch to 4 inches

LENGTH 10 Linear Feet

APPLICATION Interior


LOAD Pedestrian and Light Cart

INSTALLATION Floor

OPTIONS Moisture Barrier, Fire Barrier

MODELS


MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
NBR-100	Floor-to-Floor	1" (25mm)	2" (50mm)	2" (51mm)
NBR-100W	Floor-to-Wall	1" (25mm)	1.5" (38mm)	1" (25mm)
NBR-200	Floor-to-Floor	2" (51mm)	3" (76mm)	3.75" (95mm)
NBR-200W	Floor-to-Wall	2" (51mm)	2.5" (64mm)	2.25" (57mm)
NBR-300	Floor-to-Floor	3" (76mm)	4" (102mm)	3" (76mm)
NBR-300W	Floor-to-Wall	3" (76mm)	3.5" (89mm)	2.25" (57mm)
NBR-400	Floor-to-Floor	4" (102mm)	5" (127mm)	4" (102mm)
NBR-400W	Floor-to-Wall	4" (102mm)	4.5" (114mm)	2.25" (57mm)

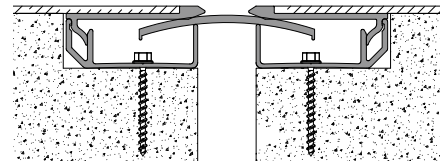


Floor-to-Floor (NBR100/NBR200 shown)



Floor-to-Floor (NBR300/NBR400 shown)

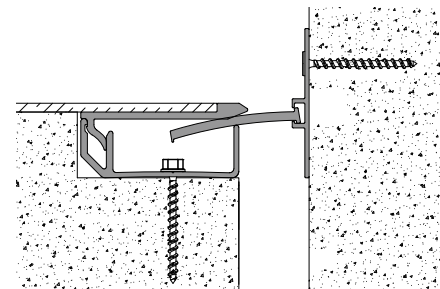

Floor-to-Wall/Corner (NBR100W/NBR200W shown)

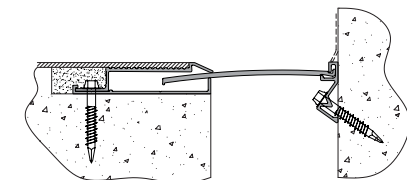

Floor-to-Wall/Corner (NBR300W/NBR400W shown)