


ITEM NO.	PART NUMBER	Description Line 1	QTY.
10	27496-37.75	RAIL, 1-1/4" X 37.75L,	2
20	27496-50.50	RAIL, 1-1/4" X 50.50L,	2
30	27496-51.75	RAIL, 1-1/4" X 51.75L,	2
500	27180-A	PKG, CORNER POST, ZPS	4
505	27259-A	PKG, SIDE POST, GALV	1
510	27185	FTG, ELBOW,	2
515	27188	FTG, TEE,	2
520	27186	FTG, CROSS ELBOW,	1
525	27231	FTG, DBL TEE,	1
530	27189	FTG, END CAP	1
575	SRCA-GATE-30	GATE, 30,	1

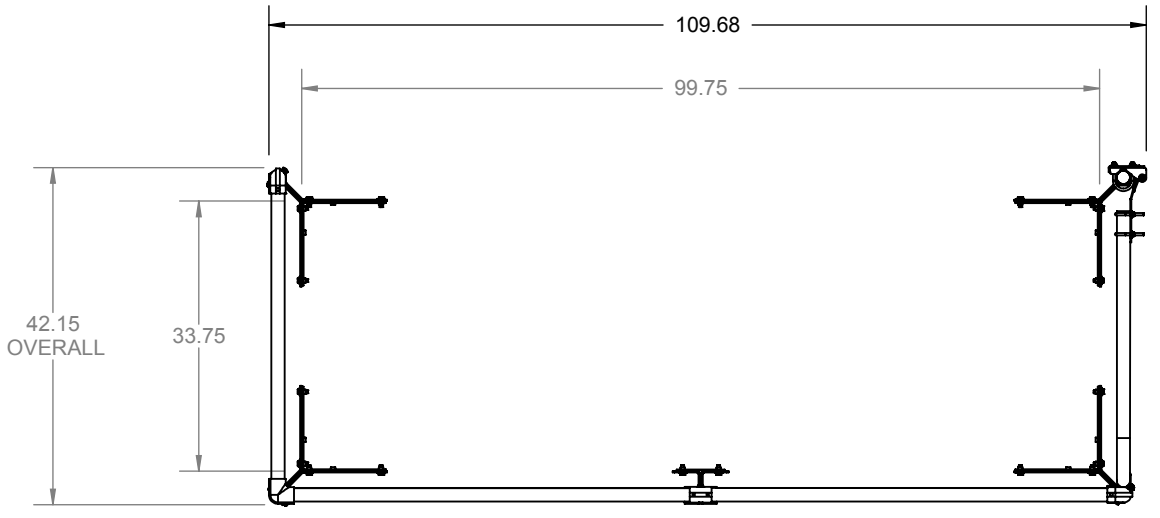

**SPECIFICATIONS**

RAILS, POSTS: 6061 TG ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 1/4" TUBULAR ALUMINUM SELF CLOSING WITH COIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEEL BACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 30" X 96"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.23 GUARDING FOR OPENINGS REQUIREMENTS; SUPPORTS 200 LBS. FORCE

**SRCA30X96SG**



9300 73rd Avenue North  
Minneapolis, MN 55428

TITLE: Safety Railings for Roof Hatch  
30X96, Side Exit, Sngl Door  
Alum, Mill, Self Closing Gate

NAME	DATE	SIZE	DWG. NO.	REV
DRAWN SJB	TODAY	B	SRCA30X96SG	A
RELEASED DWO	4/16/2018			

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

WEIGHT: Weight SHEET 1 OF 1