

8 7 6 5 4

ITEM NO. PART NUMBER DESCRIPTION QUANTITY 27496-43.75 RAIL, 1 1/4" X 43.75 10 27180-A PKG, CORNER POST, ZPS, 500 510 27185 FTG, ELBOW, 4 27188 FTG, TEE, 515 4 SRCA-GATE-30 575 GATE, 30, 1

3

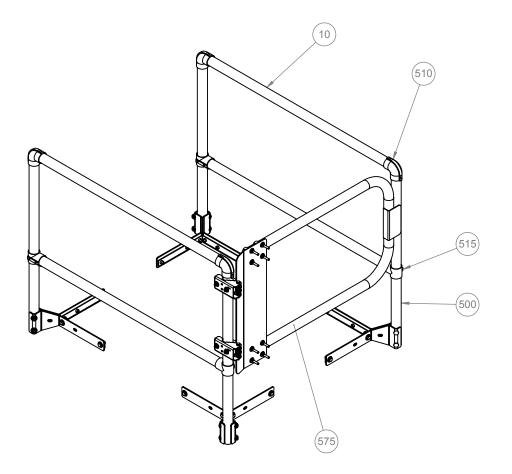

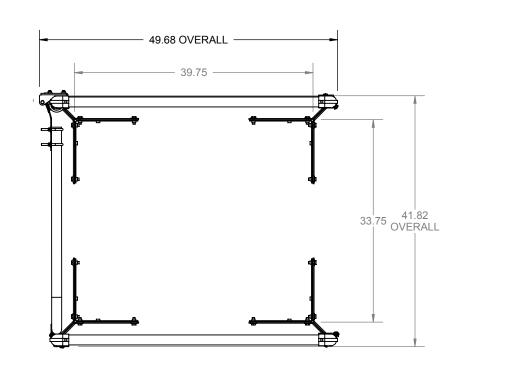

SPECIFICATIONS

D

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 1/4" TUBULAR ALUMINUM SELF CLOSING WITH C OIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEEL BACKING PLATE, SLATE GRAY POWDER COAT

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 36" X 30"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.23 GUARDING FOR OPENINGS REQUIREMENTS; SUPPORTS 200 LBS. FORCE

SRCA36X30FG

Safety Railings for Roof Hatch
36X30, Front Exit,
Alum, Mill, Self Closing Gate

NAME DATE
DRAWN SJB TODAY
RELEASED DWO 4/16/2018

NAME DATE
DRAWN SJB TODAY
RELEASED DWO 4/16/2018

NAME DATE
B SRCA36X30FG
WEIGHT: Weight SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

8 7 6 5 4 3 2