


B

B

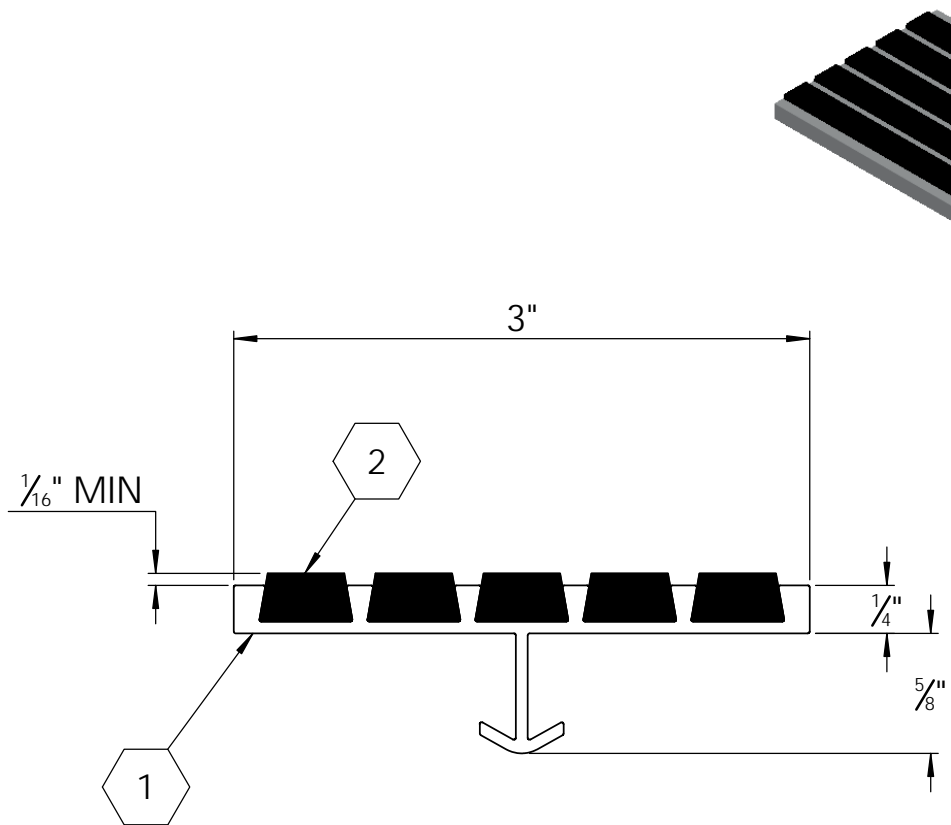

**MODEL N3E-ECO**


(SINGLE STAGE RIBBED ABRASIVE BARS)

**SPECIFICATIONS:**

- 1. **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-6
- 2. **ECOTREAD:** RECYCLED RUBBER SHEET  
8MM RECYCLED RUBBER GRANULES  
ENCAPSULATED IN A WEAR AND WATER  
RESISTANT ELASTOMERIC NETWORK. 2 PART  
EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL  
TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING  
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"  
CLEARANCE

- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW,  
BLACK-BLUE, BLACK-GRAY
- 7. **LENGTH:** 12'0" MAXIMUM
- 8. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-  
LUMINESCENT MATERIAL SHALL NOT BE LESS  
THAN 1"

LENGTH	QTY	COLOR

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:		STSB-N3E-ECO	
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:	
		V151, Stair Tread, 5 Eco-Tread Ribs, No Nose, Alum Extruded Anchor	
NAME	DATE	SIZE	DWG. NO.
DRAWN: DKL	3/31/23	A	Nystrom STN STSB-N3E-ECO ShpDr
RELEASED: GLN	3/31/23	WEIGHT: 1.27 LB	REV: A

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

A

A