


Seismic Seal System

RECESSED EPOXY-BONDED APPLICATION (EES)

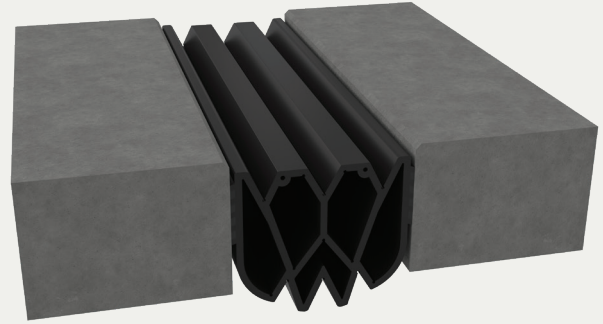

BENEFITS

DESIGN Assures profile will not protrude above surface level minimizing dirt and debris accumulation. Ribs on sides of profile assure greater adhesion.

VERSATILE Allows free movement of structure in any direction.

DETAILS

MATERIAL Santoprene, 65-A Durometer

FINISH Black

MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

MOUNTING Recessed

JOINT SIZE 2 to 4 Inches

LENGTH Continuous

APPLICATION Exterior

LOAD Vehicular

INSTALLATION Slab or Deck

OPTIONS Fire Barrier

INSTALLATION

DECK-TO-DECK



For more information, download our *Installation and Operating Manuals (IOM)* and *Shop Drawings* on Nystrom.com

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
EJN-EES-200	Deck to Deck	2" (51mm)	2" (51mm)	2.5" (64mm)
EJN-EES-300	Deck to Deck	3" (76mm)	3" (76mm)	3.25" (83mm)
EJN-EES-400	Deck to Deck	4" (102mm)	4" (102mm)	3.88" (98mm)

Additional options available, email info@nystrom.com for more information.