

Roof Bellow System

COVER MEMBRANE APPLICATION (EWCF/EWCFw)



BENEFITS

CUSTOM APPLICATION Designed for roof systems when wider curb widths are required.

EASY TRANSITION Water and weathertight factory manufactured transitions available.

DETAILS

MATERIAL 60-mil EPDM Membrane

MOVEMENT

Thermal: Horizontal and Vertical
Seismic: Lateral Shear

MOUNTING Surface

JOINT SIZE 1 to 8 Inches

LENGTH 50 or 100 Linear Foot Roll


APPLICATION Exterior

INSTALLATION Roof


OPTIONS Additional Materials, Sizes available upon request

INSTALLATION

ROOF-TO-ROOF

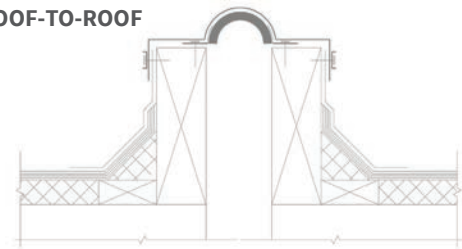

ROOF-TO-WALL



For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on nystrom.com

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	TOTAL MOVEMENT
EJN-EWCF-100	Roof to Roof	1" (25mm)	1" (25mm)
EJN-EWCF-200	Roof to Roof	2" (51mm)	2" (51mm)
EJN-EWCF-300	Roof to Roof	3" (76mm)	3" (76mm)
EJN-EWCF-400	Roof to Roof	4" (102mm)	4" (102mm)
EJN-EWCF-500	Roof to Roof	5" (127mm)	5" (127mm)
EJN-EWCF-600	Roof to Roof	6" (152mm)	6" (152mm)
EJN-EWCF-700	Roof to Roof	7" (178mm)	7" (178mm)
EJN-EWCF-800	Roof to Roof	8" (203mm)	8" (203mm)
EJN-EWCF-100W	Roof to Wall	1" (25mm)	1" (25mm)
EJN-EWCF-200W	Roof to Wall	2" (51mm)	2" (51mm)
EJN-EWCF-300W	Roof to Wall	3" (76mm)	3" (76mm)
EJN-EWCF-400W	Roof to Wall	4" (102mm)	4" (102mm)
EJN-EWCF-500W	Roof to Wall	5" (127mm)	5" (127mm)
EJN-EWCF-600W	Roof to Wall	6" (152mm)	6" (152mm)
EJN-EWCF-700W	Roof to Wall	7" (178mm)	7" (178mm)
EJN-EWCF-800W	Roof to Wall	8" (203mm)	8" (203mm)

Additional options available, email info@nystrom.com for more information.