


Seismic Fire Barrier Floor System

INSIDE, TOP OR BOTTOM APPLICATION (FLF/FLFw)

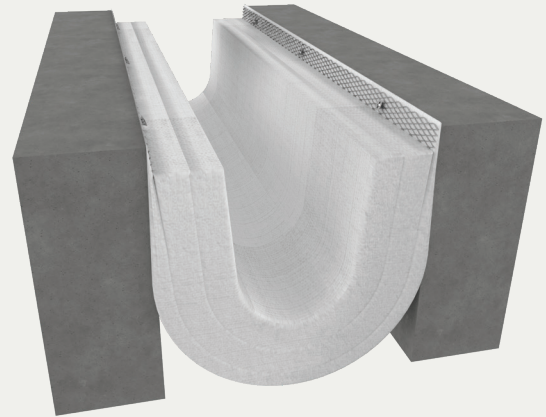

BENEFITS

FIRE-RATED Constructed of fire retardant materials to contain fires from spreading through joint openings. Available in 1-, 2- or 3-hour ratings.

EASY INSTALLATION The system installs with tongue and groove process with limited or no caulking requirements.

DETAILS

MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: +/- 50% Lateral Shear

MOUNTING

- Inside: All sizes
- Top: 4 inches and greater
- Bottom: 6 inches and greater

JOINT SIZE 2 Inches to 24 Inches

LENGTH

- FLF: TM/IM 10 Linear Feet, up to 12"; 4 Linear Feet, 14" and up
- BM 4 Linear Feet

FIRE-RATING 1, 2 or 3 Hour (3 hour available for 6" and larger joint sizes)

APPLICATION Interior

INSTALLATION Floor


COMPLIANCE Tested in accordance with:

- UL 2079/ ULC S-115 "FTH" (FTH: Rating Fire, Temperature and Hose)
- ASTM-E119, E1399, E1966
- BS EN 1366.4


OPTIONS Additional Movement, Transitions and Weather Barrier Options are Available Upon Request.

INSTALLATION

FLOOR-TO-FLOOR

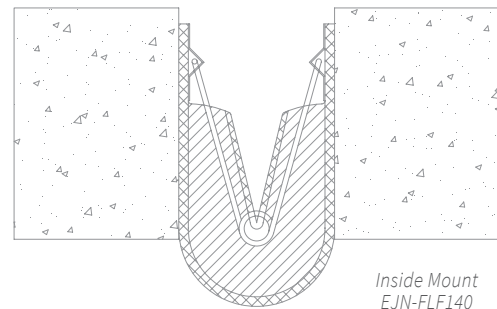

FLOOR-TO-FLOOR

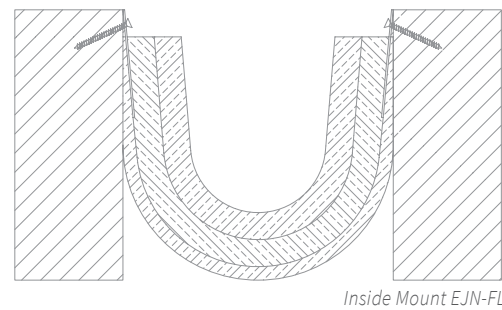

For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on Nystrom.com

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	TOTAL MOVEMENT
EJN-FLF140-200	Floor to Floor/Wall	2" (51mm)	2" (51mm)
EJN-FLF140-300	Floor to Floor/Wall	3" (76mm)	3" (76mm)
EJN-FLF140-400	Floor to Floor/Wall	4" (102mm)	4" (102mm)
EJN-FLF-400	Floor to Floor	4" (102mm)	4" (102mm)
EJN-FLF-600	Floor to Floor	6" (152mm)	6" (152mm)
EJN-FLF-800	Floor to Floor	8" (203mm)	8" (203mm)
EJN-FLF-1000	Floor to Floor	10" (254mm)	10" (254mm)
EJN-FLF-1200	Floor to Floor	12" (305mm)	12" (305mm)
EJN-FLF-1400	Floor to Floor	14" (356mm)	14" (356mm)
EJN-FLF-1600	Floor to Floor	16" (406mm)	16" (406mm)
EJN-FLF-1800	Floor to Floor	18" (457mm)	18" (457mm)
EJN-FLF-2000	Floor to Floor	20" (508mm)	20" (508mm)
EJN-FLF-2200	Floor to Floor	22" (558mm)	22" (558mm)
EJN-FLF-2400	Floor to Floor	24" (609mm)	24" (609mm)

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	TOTAL MOVEMENT
EJN-FLF-400W	Floor to Wall	4" (102mm)	4" (102mm)
EJN-FLF-600W	Floor to Wall	6" (152mm)	6" (152mm)
EJN-FLF-800W	Floor to Wall	8" (203mm)	8" (203mm)
EJN-FLF-1000W	Floor to Wall	10" (254mm)	10" (254mm)
EJN-FLF-1200W	Floor to Wall	12" (305mm)	12" (305mm)
EJN-FLF-1400W	Floor to Wall	14" (356mm)	14" (356mm)
EJN-FLF-1600W	Floor to Wall	16" (406mm)	16" (406mm)
EJN-FLF-1800W	Floor to Wall	18" (457mm)	18" (457mm)
EJN-FLF-2000W	Floor to Wall	20" (508mm)	20" (508mm)
EJN-FLF-2200W	Floor to Wall	22" (558mm)	22" (558mm)
EJN-FLF-2400W	Floor to Wall	24" (609mm)	24" (609mm)

Additional options available, email info@nystrom.com for more information.