

# Seismic Pre-Compressed Parking Deck Foam System

## RECESSED APPLICATION (PDM)



### BENEFITS

**WATERTIGHT** This primary seal creates a watertight joint system for Decks and Stadiums.

**TRAFFIC-DURABLE** This system holds up against high movement and traffic loads found in parking structures.

### DETAILS

**MATERIAL** Foam with Silicone Bellow

**SIZE** 1/2 inch to 4 inches, additional sizes available in 1/4-inch increments from 1 to 4 Inches. Joints 3" and larger will require cover plates.

**LENGTH** 6.56 linear feet (2m)

**APPLICATION** Interior or Exterior

**INSTALLATION** Floor or Deck

**OPTIONS** Terminations, Transitions, Seal Depths, and Dual Sided

**MOVEMENT** +/- 50% (Total 100%)

### ORDER GUIDE

MODEL	JOINT SIZE AT MEAN T°F	SEAL DEPTH
EJN-PDM-050	1/2" (13mm)	2" (51mm)
EJN-PDM-063	5/8" (16mm)	2" (51mm)
EJN-PDM-075	3/4" (19mm)	2" (51mm)
EJN-PDM-100	1" (25mm)	2" (51mm)
EJN-PDM-200	2" (51mm)	3" (76mm)
EJN-PDM-300	3" (76mm)	3" (76mm)
EJN-PDM-400	4" (102mm)	4" (102mm)


Additional options available, email [info@nystrom.com](mailto:info@nystrom.com) for more information.

### OPTIONS


#### TERMINATIONS



#### TRANSITIONS

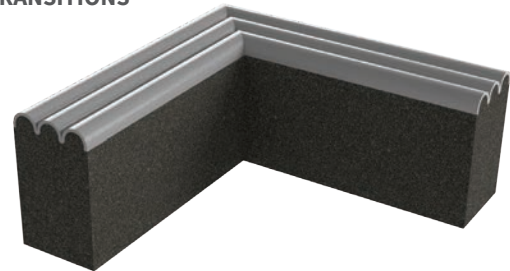


### SEAL COLORS



Traffic Grade  
Black



Highway  
Gray



Concrete  
Gray  
Standard