


# Seismic Wing Parking System

## RECESSED BLOCKOUT APPLICATION (WS/WSw)

### BENEFITS

**WATERTIGHT** Designed to provide a continuous, watertight seal under rigorous seismic and low-speed traffic conditions.

**HEAVY DUTY** Designed for low speed vehicular traffic and is commonly used in parking ramps and across walkways and pedestrian traffic.

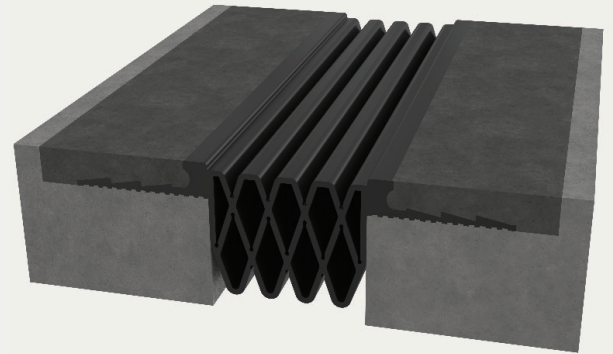

### DETAILS

**MATERIAL** Santoprene, 65A Durometer

**FINISH** Black

**MOVEMENT**

Thermal: Horizontal and Vertical

Seismic: Lateral Shear

**MOUNTING** Blockout

**JOINT SIZE** 2 to 6 Inches

**LENGTH** Continuous

**APPLICATION** Exterior


**LOAD** Vehicular

**INSTALLATION** Slab or Deck


**OPTIONS** Fire Barrier

### INSTALLATION

#### DECK-TO-DECK

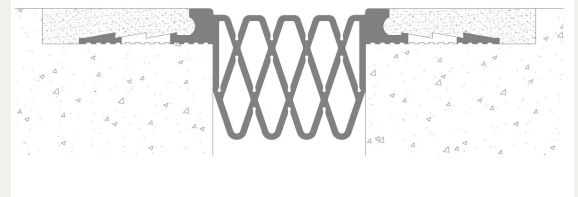

#### DECK-TO-WALL

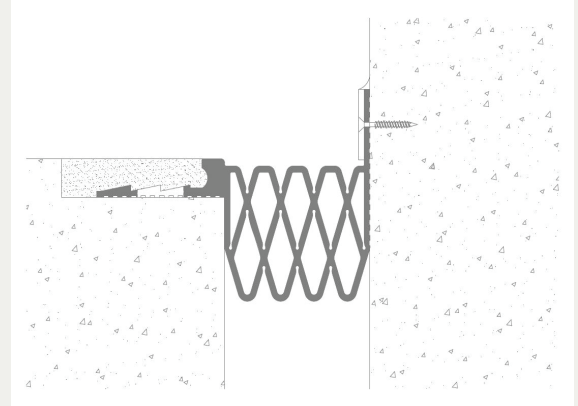

For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on [nystrom.com](http://nystrom.com)

### ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
EJN-WS-200	Deck to Deck	2" (51mm)	Approx. 2" (51mm)	2.25" (57mm)
EJN-WS-300	Deck to Deck	3" (76mm)	Approx. 3" (76mm)	3" (76mm)
EJN-WS-400	Deck to Deck	4" (102mm)	Approx. 4" (102mm)	4.50" (114mm)
EJN-WS-500	Deck to Corner	5" (127mm)	Approx. 6" (152mm)	5" (127mm)
EJN-WS-600	Deck to Corner	6" (152mm)	Approx. 2" (51mm)	6.5" (165mm)
EJN-WS-200W	Deck to Corner	2" (51mm)	Approx. 3" (76mm)	2.25" (57mm)
EJN-WS-300W	Deck to Corner	3" (76mm)	Approx. 4" (102mm)	3" (76mm)
EJN-WS-400W	Deck to Corner	4" (102mm)	Approx. 6" (152mm)	4.5" (114mm)
EJN-WS-500W	Deck to Corner	5" (127mm)	Approx. 6" (152mm)	5" (127mm)
EJN-WS-600W	Deck to Corner	6" (152mm)	Approx. 6" (152mm)	6.5" (165mm)

Additional options available, email [info@nystrom.com](mailto:info@nystrom.com) for more information.