


# Uncoated Non-Precompressed Closed Cell Foam System

## RECESSED APPLICATION (ESU)

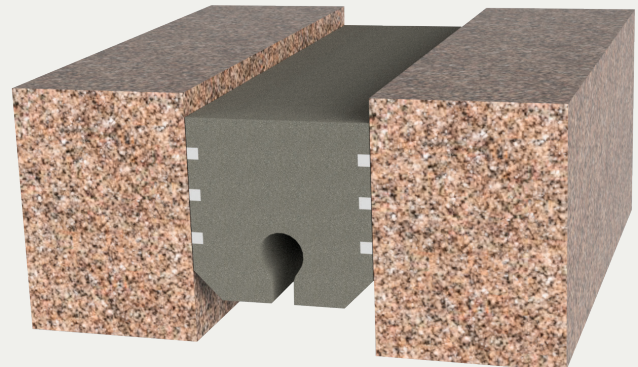

### BENEFITS

**SIMPLICITY** Minimal components and flexibility of seal allows for quick joint repairs and short traffic closures.

**TRAFFIC CAPABLE** Water tight, closed cell foam system that doesn't require invasive anchoring

### DETAILS

**MATERIAL** Closed Cell Foam Core

**SIZE** 1/2 inch to 10 inches

- Sizes available in 1/4-inch increments starting at 1/2 inch
- Product supplied uncompressed at a standard 25% larger than the mean joint size

**LENGTH** 6 linear feet

**APPLICATION** Interior or Exterior


**INSTALLATION** Ceiling, Wall or Floor

**OPTIONS** Terminations, Transitions, and Seal Depths


**MOVEMENT** +/- 25% (Total 50%)

### OPTIONS

#### TRANSITIONS



### COLORS



Gray

### ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	SEAL DEPTH
EJN-ESU-050	Surface	1/2" (13mm)	1-1/2" (38mm)
EJN-ESU-063	Surface	3/8" (16mm)	1-1/2" (38mm)
EJN-ESU-075	Surface	3/4" (19mm)	1-1/2" (38mm)
EJN-ESU-100	Surface	1" (25mm)	1-1/2" (38mm)
EJN-ESU-200	Surface	2" (51mm)	2" (51mm)
EJN-ESU-300	Surface	3" (76mm)	2" (51mm)
EJN-ESU-400	Surface	4" (102mm)	3" (76mm)
EJN-ESU-500	Surface	5" (127mm)	3" (76mm)
EJN-ESU-600	Surface	6" (152mm)	4" (102mm)
EJN-ESU-700	Surface	7" (178mm)	4" (102mm)
EJN-ESU-800	Surface	8" (203mm)	4" (102mm)
EJN-ESU-900	Surface	9" (229mm)	4" (102mm)
EJN-ESU-1000	Surface	10" (254mm)	4" (102mm)

Additional options available, email [info@nystrom.com](mailto:info@nystrom.com) for more information.