


## **Elastomeric Corridor** Wall & Ceiling System DRYWALL BEAD APPLICATION (LCW/LCWw)

## **BENEFITS**

**COMPLEMENTARY SEAL COLORS** Available in four elastomeric colors: beige, white, gray or black.

QUICKER INSTALLATION Reduce installation time and labor costs with fast and easy installation.



## **DETAILS**

MATERIAL 6063-T5 Aluminum, Meets ASTM B221 and Santoprene

FINISH Mill

**MOVEMENT** Thermal: Horizontal

MOUNTING Flush with Drywall Bead

**JOINT SIZE** 1 inch to 3 inches


**LENGTH** Aluminum 10 Linear Feet, Seals Longest Practical Continuous Length


**APPLICATION** Interior

**INSTALLATION** Wall or Ceiling

**OPTIONS** Moisture barrier, Fire barrier and Additional Materials, Sizes and Finishes upon request

## **SEAL COLORS**



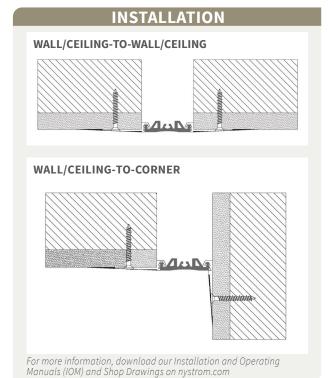

ORDER GUIDE				
MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
EJN-LCW-100	Wall/Ceiling to Wall/Ceiling	1" (25mm)	1" (25mm)	.5" (13mm)
EJN-LCW-200	Wall/Ceiling to Wall/Ceiling	2" (51mm)	2" (51mm)	1" (25mm)
EJN-LCW-300	Wall/Ceiling to Wall/Ceiling	3" (76mm)	3" (76mm)	1.5" (38mm)
EJN-LCW-100W	Wall/Ceiling to Corner	1" (25mm)	1" (25mm)	.5" (13mm)
EJN-LCW-200W	Wall/Ceiling to Corner	2" (51mm)	2" (51mm)	1" (25mm)
EJN-LCW-300W	Wall/Ceiling to Corner	3" (76mm)	3" (76mm)	1.5" (38mm)

© 2024 Nystrom 04/30/2024