


Elastomeric Corridor Wall & Ceiling System

RECESSED APPLICATION (LCWF/LCWFw)

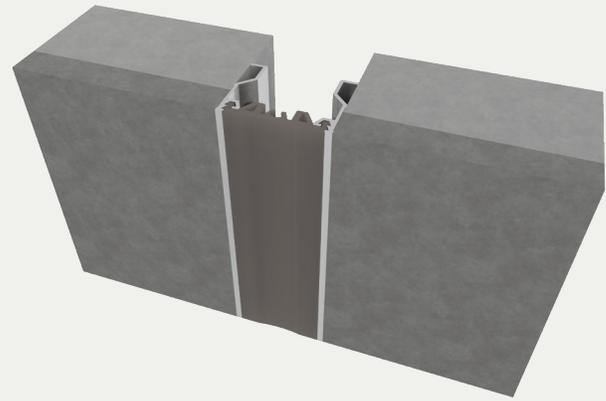

BENEFITS

- COMPLEMENTARY SEAL COLORS** Available in four elastomeric seal color options: beige, white, gray or black
- CONTINUOUS SIGHT LINE** This system can be used on walls, ceilings and corners to provide seamless and continuous aesthetics

DETAILS


- MATERIAL** 6063-T5 Aluminum, Meets ASTM B221 and santoprene
- FINISH** Mill
- MOVEMENT** Thermal: Horizontal
- MOUNTING** Flush
- JOINT SIZE** 1 inch to 3 inches
- LENGTH** 10 Linear Feet
- APPLICATION** Interior
- INSTALLATION** Wall or Ceiling
- OPTIONS** Fire Barrier, Additional Materials, Sizes and Finishes Available Upon Request

SEAL COLORS




INSTALLATION

WALL-TO-WALL

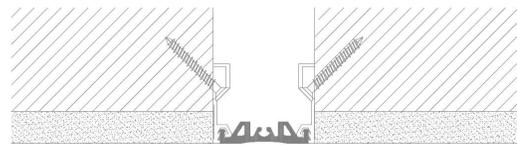

WALL-TO-WALL/CORNER

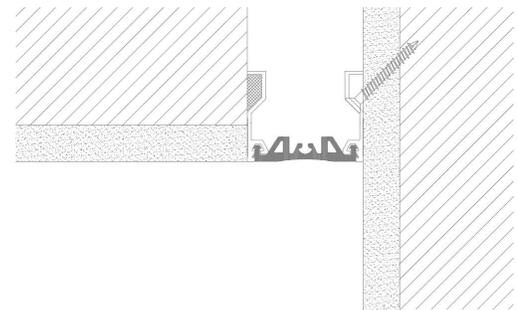

For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on Nystrom.com

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
EJN-LCWF-100	Wall/Ceiling to Wall/Ceiling	1" (25mm)	1" (25mm)	.5" (13mm)
EJN-LCWF-200	Wall/Ceiling to Wall/Ceiling	2" (51mm)	2" (51mm)	1" (25mm)
EJN-LCWF-300	Wall/Ceiling to Wall/Ceiling	3" (76mm)	3" (76mm)	1.5" (38mm)
EJN-LCWF-100W	Wall/Ceiling to Corner	1" (25mm)	1" (25mm)	.5" (13mm)
EJN-LCWF-200W	Wall/Ceiling to Corner	2" (51mm)	2" (51mm)	1" (25mm)
EJN-LCWF-300W	Wall/Ceiling to Corner	3" (76mm)	3" (76mm)	1.5" (38mm)

Additional options available, email info@nystrom.com for more information.