


# Seismic Aluminum Glide Flooring System

## INFILL BLOCKOUT APPLICATION (NBR/NBRw)

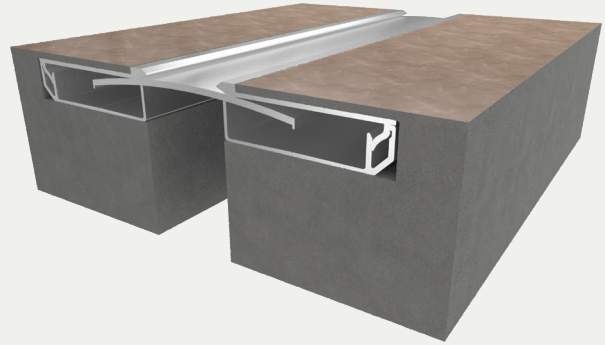

### BENEFITS


- FLOORING INFILL** Designed with a recess for vinyl, carpet or tile (VCT) flooring to cover the aluminum plate and reduce the overall sight-line.
- COORDINATING CORNERS** Available with corner option for a complete floor solution.

### DETAILS


- MATERIAL** 6063-T5 Aluminum
- FINISH** Mill
- MOVEMENT**
  - Thermal: Horizontal and Vertical
  - Seismic: Lateral Shear
- MOUNTING** Block Out
- JOINT SIZE** 1 inch to 4 inches
- LENGTH** 10 Linear Feet
- APPLICATION** Interior
- LOAD** Pedestrian and Light Cart
- INSTALLATION** Floor
- OPTIONS** Moisture Barrier, Fire Barrier, and Additional Sizes Upon Request

### INSTALLATION

#### DECK-TO-FLOOR

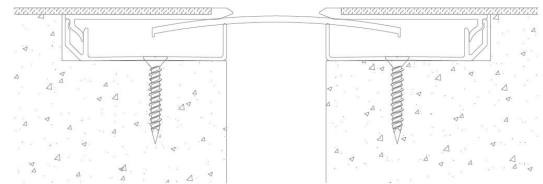

#### DECK-TO-WALL/CORNER

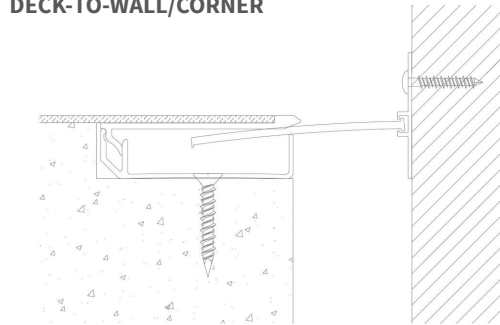

For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on [Nystrom.com](http://Nystrom.com)

### ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	INFILL HEIGHT	TOTAL MOVEMENT
EJN-NBR-100	Floor to Floor	1" (25mm)	1.75" (44mm)	0.125" (3mm)	1" (25mm)
EJN-NBR-200	Floor to Floor	2" (51mm)	2.75" (70mm)	0.125" (3mm)	2" (51mm)
EJN-NBR-300	Floor to Floor	3" (76mm)	3.75" (95mm)	0.125" (3mm)	3" (76mm)
EJN-NBR-400	Floor to Floor	4" (102mm)	4.75" (120mm)	0.125" (3mm)	4" (102mm)
EJN-NBR-100W	Floor to Wall	1" (25mm)	1.375" (35mm)	0.125" (3mm)	.5" (13mm)
EJN-NBR-200W	Floor to Wall	2" (51mm)	2.375" (60mm)	0.125" (3mm)	1" (25mm)
EJN-NBR-300W	Floor to Wall	3" (76mm)	3.375" (88mm)	0.125" (3mm)	1.5" (38mm)
EJN-NBR-400W	Floor to Wall	4" (102mm)	4.375" (111mm)	0.125" (3mm)	2" (51mm)

Additional options available, email [info@nystrom.com](mailto:info@nystrom.com) for more information.