

Pre-Compressed Primary Foam System

VERTICAL APPLICATION (PBF)

BENEFITS

The Nystrom Pre-Compressed Primary Foam system is specifically suited for vertical applications. The “breathability” and ability to keep dust and debris out of environments is unmatched. Suitable for exterior and interior applications.

- Allows air to pass through while keeping dust/debris out.
- R-Value: 2.8 per inch of depth



DETAILS

MATERIAL Open cell foam

SIZE 1/8 inches to 4 inches

LENGTH For Joint widths Smaller than 2.00" (51mm)
length = Rolls

For Joint widths 2.00" (51mm) and larger, length = 6.5 foot
(2.0M) Sticks

APPLICATION Exterior and Interior


INSTALLATION Wall

CERTIFICATIONS C518

EXPOSED FINISH Black (prior to any optional wet seal)

MOVEMENT +/- 25% Nominal Joint Width

INSTALLATION

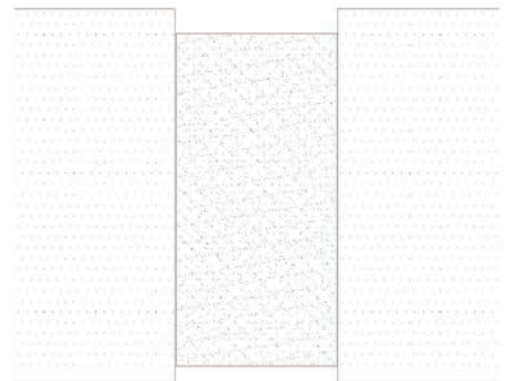

For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on nystrom.com

ORDER GUIDE

MODEL	JOINT SIZE AT MEAN T°F	SEAL DEPTH
EJN-PBF-013	1/8" (3mm)	3/8" (10mm)
EJN-PBF-019	3/16" (5mm)	3/8" (10mm)
EJN-PBF-025	1/4" (6mm)	3/4" (19mm)
EJN-PBF-038	3/8" (10mm)	3/4" (19mm)
EJN-PBF-050	1/2" (13mm)	3/4" (19mm)
EJN-PBF-063	5/8" (16mm)	1" (25mm)
EJN-PBF-075	3/4" (19mm)	1" (25mm)
EJN-PBF-100	1" (25mm)	1-1/2" (38mm)
EJN-PBF-200	2" (51mm)	3" (76mm)
EJN-PBF-300	3" (76mm)	3" (76mm)
EJN-PBF-400	4" (102mm)	4" (102mm)

Additional options available, email info@nystrom.com for more information.