


Rubber Coated Heavy Duty System, Surface Application

SURFACE APPLICATION (RCP)

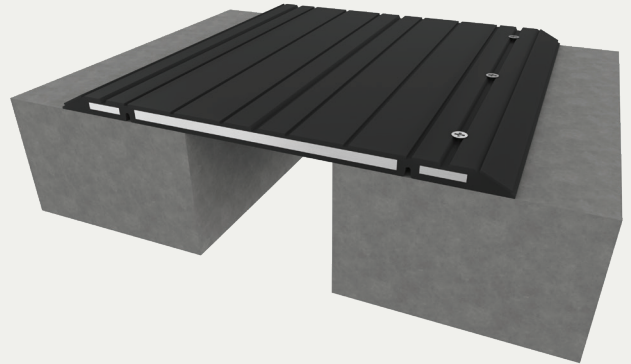

BENEFITS

SOUND DAMPENER The rubber coating with tapered edges assist in reducing noise from vehicle tires.

HEAVY DUTY Designed for low speed vehicular traffic and is commonly used in parking ramps and across walkways and pedestrian traffic.

DETAILS

MATERIAL Steel, Meets ASTM A588

FINISH Rubber Coated

MOVEMENT Thermal: Horizontal and Vertical

MOUNTING Surface

JOINT SIZE 3 to 15-1/8 inches

LENGTH Varies due to model, see shop drawing for specifics

APPLICATION Exterior or Interior

LOAD Vehicle and Pedestrian


INSTALLATION Floor or deck

OPTIONS Moisture barrier, Fire barrier

COMPLIANCE ADA Compliant

INSTALLATION

DECK-TO-DECK

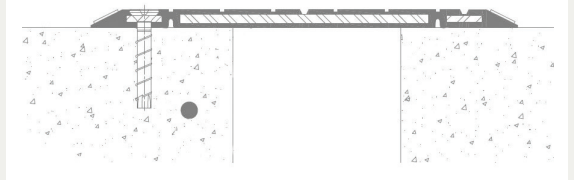

For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on nystrom.com

SEAL COLORS



Black



Gray

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	SERVICE MOVEMENT
EJ-RCP-600N	Deck to Deck	3" (76mm)	12" (305mm)	6" (152mm)
EJ-RCP-1000N	Deck to Deck	5" (127mm)	18" (457mm)	10" (254mm)
EJ-RCP-1200N	Deck to Deck	6" (152mm)	18" (457mm)	12" (305mm)
EJ-RCP-1800N	Deck to Deck	9" (229mm)	24" (610mm)	18" (457mm)
EJ-RCP-2400	Deck to Deck	11.63" (295mm)	29.75" (756mm)	23.25" (591mm)
EJ-RCP-3100	Deck to Deck	15.13" (384mm)	36.75" (933mm)	30.25" (768mm)

Additional options available, email info@nystrom.com for more information.