


Seismic Pre-Compressed Vertical Foam System

RECESSED APPLICATION (SES)

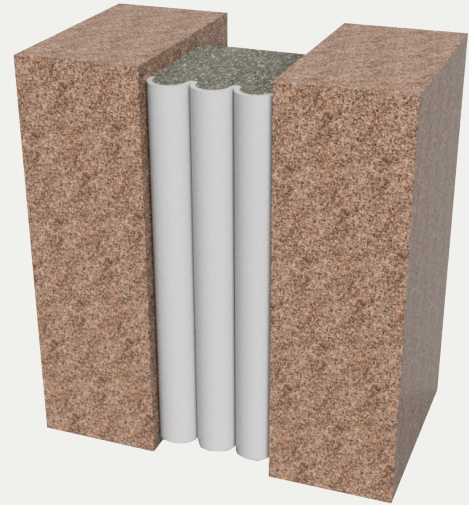

BENEFITS

COLOR COORDINATING Add a complementary color to your building with one of the available pretinted silicone colors

OMNI-DIRECTIONAL Curves and abrupt changes in building elements are easily accommodated while maintaining watertightness

DETAILS

MATERIAL Foam with Silicone Bellow

SIZE ½ inch to 10 inches

- Sizes available in ¼-inch increments from 1 inch to 10 inches
- Sizes from ½ inch to 1¼ inches are manufactured with a double silicone face bellow
- Larger sizes up to 10 inches are manufactured with multiple bellows

LENGTH 6.56 linear feet (2m)

APPLICATION Interior or Exterior

INSTALLATION Wall

CERTIFICATIONS STC52, OITC38

OPTIONS Terminations, Transitions, Seal Depths, Dual Sided, Uncoated and Pick-Resistant Sealant

MOVEMENT +/- 50% (Total 100%)

ORDER GUIDE

MODEL	JOINT SIZE AT MEAN T°F	SEAL DEPTH
EJN-SES-050	½" (13mm)	2" (51mm)
EJN-SES-063	⅝" (16mm)	2" (51mm)
EJN-SES-075	¾" (19mm)	2" (51mm)
EJN-SES-100	1" (25mm)	2" (51mm)
EJN-SES-200	2" (51mm)	3" (76mm)
EJN-SES-300	3" (76mm)	3" (76mm)
EJN-SES-400	4" (102mm)	4" (102mm)
EJN-SES-500	5" (127mm)	4" (102mm)
EJN-SES-600	6" (152mm)	6" (152mm)
EJN-SES-700	7" (179mm)	6" (152mm)
EJN-SES-800	8" (203mm)	6" (203mm)
EJN-SES-900	9" (229mm)	8" (203mm)
EJN-SES-1000	10" (254mm)	8" (203mm)

Additional options available, email info@nystrom.com for more information.

OPTIONS

TERMINATIONS



TRANSITIONS



For more information, download our Installation and Operating Manuals (IOM) and Shop Drawings on Nystrom.com

SEAL COLORS

