

## Notes:

1.) Please refer to the installation manual for information on splices, terminations, transitions, and additional details concerning adjacent construction.

2.) Maximum values shown on dimension chart are the limits for proper system performance.


3.) The system and all mechanical components are supplied to accommodate 6.0 foot section lengths. If required, please consult with a Nystrom representative for the types and quantities of any components needed for proper installation.

4) Anchor embedment length shown in details applicable for installing system directly into structural concrete. Contact a Nystrom representative when anchoring system into conditions where topping slabs or other non-structural support conditions occur at system interface for suggested adjustment to embedment length.

5). Edge distance shown in details in conformance to fastener recommendations. Contact a Nystrom representative for project specific conditions where potential interference may occur with concrete reinforcing steel, post tensioning details, or other conditions where adjustment to edge distance is desired.

6). The EJ-RCP-600N is too light to take a  $\pm 1/2"$  (13mm) substrate offset. A EJ-RCP-1200N or larger is required - please consult with a Nystrom representative for projects requiring a  $\pm 1/2"$  (13mm) substrate offset.

7.) An alternate Stainless Steel anchor (#32431) is available for an upcharge.

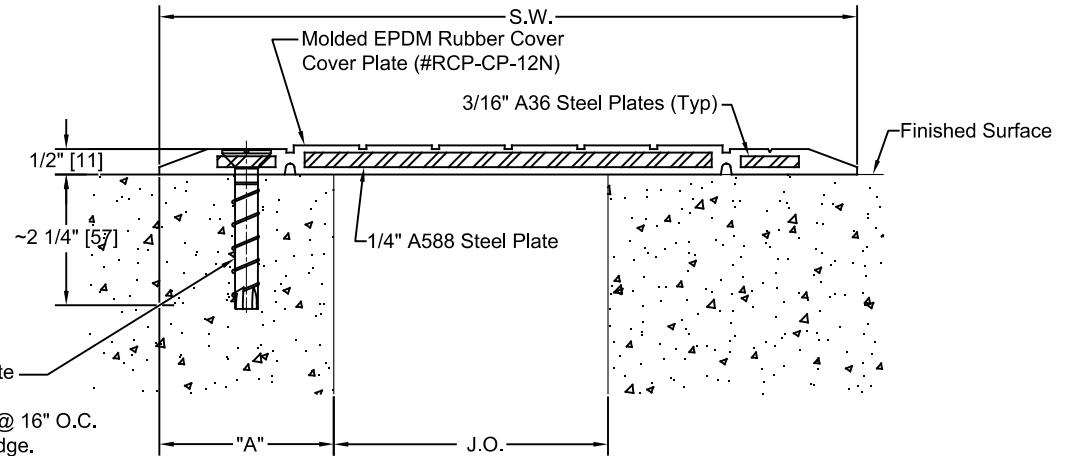

## MODEL "EJ-RCP-600N"


Designed For Pedestrian Foot Traffic And Slow Speed Non-Commercial Vehicular Traffic.  
(surface mounted condition)

### Dimension Chart

| Model       | System Width (S.W.) | Panel Length | Joint Opening @ Midrange Temperature | Vehicular Joint Opening (J.O.) Max |           | Setback "A" |
|-------------|---------------------|--------------|--------------------------------------|------------------------------------|-----------|-------------|
|             |                     |              |                                      | (Service)                          | (Seismic) |             |
| EJ-RCP-600N | 12"(305)            | 6ft (1829)   | 3"(76)                               | 6"(152)                            | 7" (178)  | 3"(76)      |

### RUBBER COLOR SELECTOR

BLACK \_\_\_\_\_ GRAY \_\_\_\_\_

|  |      |          |      |   |  |              |
|--|------|----------|------|---|--|--------------|
| PROJECT:   |      |          |      |   |  |              |
| ARCHITECT:   |      |          |      |   |  |              |
| CONTRACTOR:  |      |          |      |   |  |              |
| QTY:   |      |          |      |   |  |              |
| PART#:   |      |          |      | EJ-RCP-600N   |  |              |
| <br>9300 73 <sup>rd</sup> Ave N., Minneapolis, MN 55428<br>800-547-2635<br>info@nystrom.com |      |          |      | TITLE:<br>RUBBER COATED<br>HEAVY DUTY SYSTEM<br>SURFACE APPLICATION |  |              |
|  | NAME | DATE     | SIZE | DWG. NO.  |  | REV          |
| DRAWN  | JKP  | 12/03/24 | A    | EJ-RCP-600N   |  | A            |
| RELEASED   |      |          |      | WEIGHT:   |  | SHEET 1 OF 2 |

**Notes:**

1.) Please refer to the installation manual for information on splices, terminations, transitions, and additional details concerning adjacent construction.

2.) Maximum values shown on dimension chart are the limits for proper system performance.


3.) The system and all mechanical components are supplied to accommodate 6.0 foot section lengths. If required, please consult with a Nystrom representative for the types and quantities of any components needed for proper installation.

4) Anchor embedment length shown in details applicable for installing system directly into structural concrete. Contact a Nystrom representative when anchoring system into conditions where topping slabs or other non-structural support conditions occur at system interface for suggested adjustment to embedment length.

5). Edge distance shown in details in conformance to fastener recommendations. Contact a Nystrom representative for project specific conditions where potential interference may occur with concrete reinforcing steel, post tensioning details, or other conditions where adjustment to edge distance is desired.

6). The EJ- RCP-600N is too light to take a +/-1/2" (13mm) substrate offset. A EJ-RCP-1200N or larger is required - please consult with a Nystrom representative for projects requiring a +/-1/2" (13mm) substrate offset.

7.) An alternate Stainless Steel anchor (#32431) is available for an upcharge.

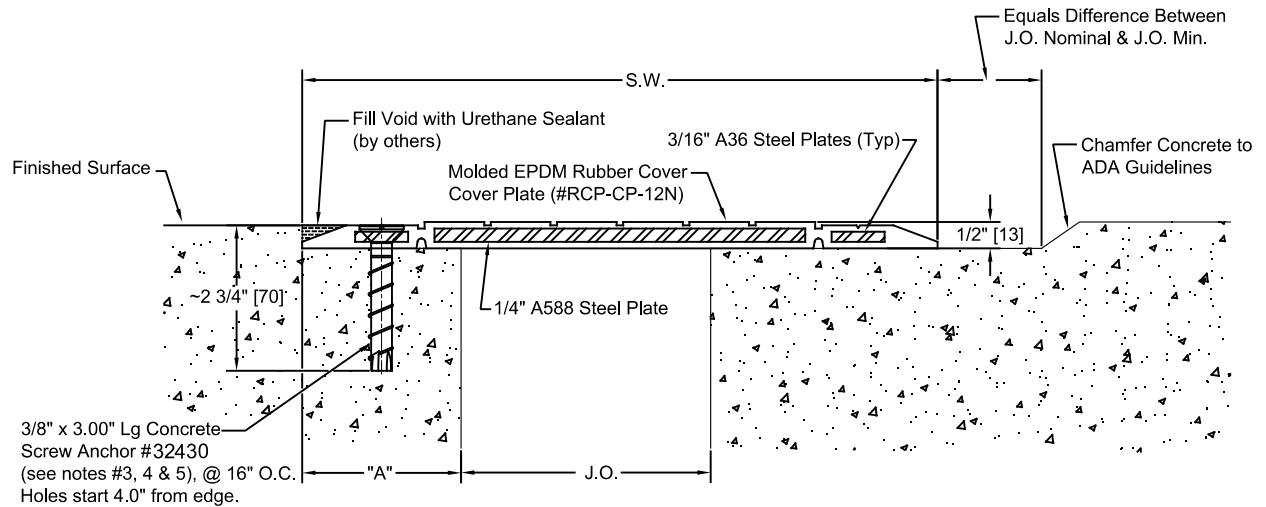

## MODEL "EJ-RCP-600N"

Designed For Pedestrian Foot Traffic And Slow  
Speed Non-Commercial Vehicular Traffic.  
(recessed condition)

Dimension Chart

| Model       | System Width (S.W.) | Panel Length | Joint Opening @ Midrange Temperature | Vehicular Joint Opening (J.O.) Max |           | Setback "A" |
|-------------|---------------------|--------------|--------------------------------------|------------------------------------|-----------|-------------|
|             |                     |              |                                      | (Service)                          | (Seismic) |             |
| EJ-RCP-600N | 12"(305)            | 6ft (1829)   | 3"(76)                               | 6"(152)                            | 7" (178)  | 3"(76)      |

PROJECT:

ARCHITECT:

CONTRACTOR:

QTY:

PART#:

EJ-RCP-600N



9300 73rd Ave N., Minneapolis, MN 55428  
800-547-2635  
info@nystrom.com

TITLE:

RUBBER COATED  
HEAVY DUTY SYSTEM  
SURFACE APPLICATION

NAME

DATE

SIZE

DWG. NO.

**EJ-RCP-600N**

REV

DRAWN

JPk

12/03/24

A

WEIGHT:

A

RELEASED

SHEET 2 OF 2