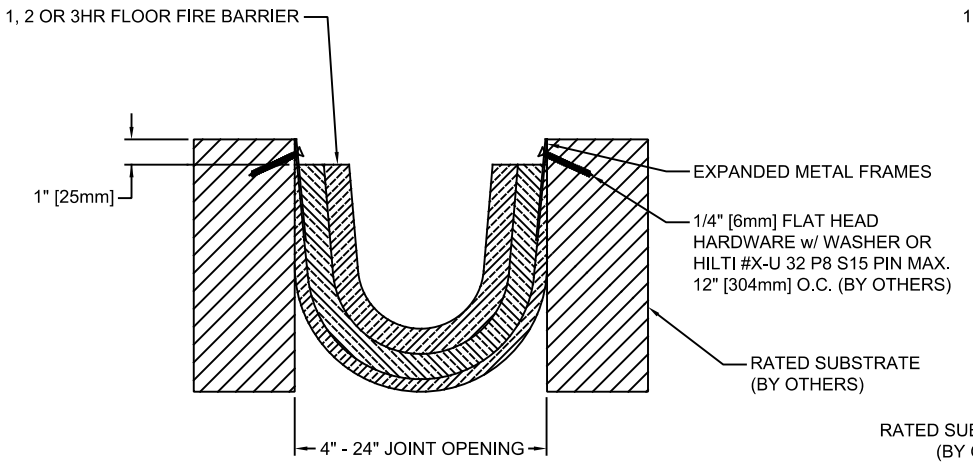

EJN-FLF SERIES

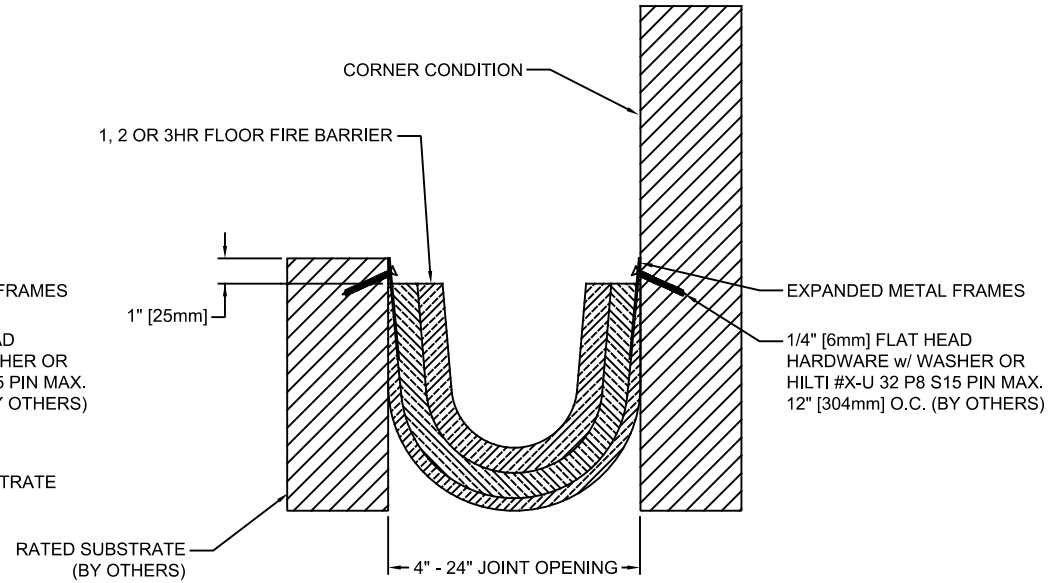

EJN-FLF/w SERIES

EXAMPLE P/N'S

2HR RATING
- *(6" JOINT OPENING : P/N = EJN-FLF-600)*
- *(10" JOINT OPENING : P/N = EJN-FLF-1000)*
- *(24" JOINT OPENING : P/N = EJN-FLF-2400)*

3HR RATING
- *(6" JOINT OPENING : P/N = EJN-FLF-600-3HR)*
- *(10" JOINT OPENING : P/N = EJN-FLF-1000-3HR)*
- *(24" JOINT OPENING : P/N = EJN-FLF-2400-3HR)*

EXAMPLE P/N'S

2HR RATING
- *(6" JOINT OPENING : P/N = EJN-FLF-600W)*
- *(10" JOINT OPENING : P/N = EJN-FLF-1000W)*
- *(24" JOINT OPENING : P/N = EJN-FLF-2400W)*

3HR RATING
- *(6" JOINT OPENING : P/N = EJN-FLF-600W-3HR)*
- *(10" JOINT OPENING : P/N = EJN-FLF-1000W-3HR)*
- *(24" JOINT OPENING : P/N = EJN-FLF-2400W-3HR)*

SEISMIC FIRE BARRIER FLOOR SYSTEM

- MOVEMENT: +/- 50% (TOTAL = 100%)
- STOCK LENGTHS:
  - : 4" - 12" JOINT OPENINGS = 10 FT (3.0M) INCREMENTS,
  - : 14" - 24" JOINT OPENINGS = 4 FT (1.2M) INCREMENTS
- RATED SUBSTRATE MUST BE IN COMPLIANCE WITH UL REQUIREMENTS (BY OTHERS)
- LISTED BY INTERTEK USA/CANADA 2HR RATING
- MEETS UL 2079, ULC S-115, ASTM E-1399 AND ASTM E-1966-01
- ALL SIZES ARE AVAILABLE WITH A 2HR RATING. 3HR IS AVAILABLE FOR 6" AND LARGER JOINT SIZES

THIS FIRE BARRIER IS TESTED WITH A METAL COVER. IN AREAS WHERE ONLY ELASTOMERIC OR NO COVERS ARE USED, WE CAN PRODIDE A STAINLESS-STEEL FOIL TO MAINTAIN THE RATING

DRA	DWG. NO. **EJN-FLF SERIES** A