# nystrom®




# NEW

Introducing the industry's only sustainable safety treads:

### EcoTread<sup>™</sup> Stair Nosings.


- Made from 90% recycled rubber
- 100% recyclable materials
- Fade and wear resistant
- Easy to clean and maintain
- Easily replaceable
- Contemporary color choices



### EcoTread<sup>™</sup> STAIR TREADS + NOSINGS

Sustainability, one step at a time.

The EcoTread Stair Nosings offer a sustainable and ecofriendly material option. An industry first, these treads are engineered with recycled aluminum and rubber. Multiple tread options provide a variety of coordinating color options that are perfect for both interior and exterior use.

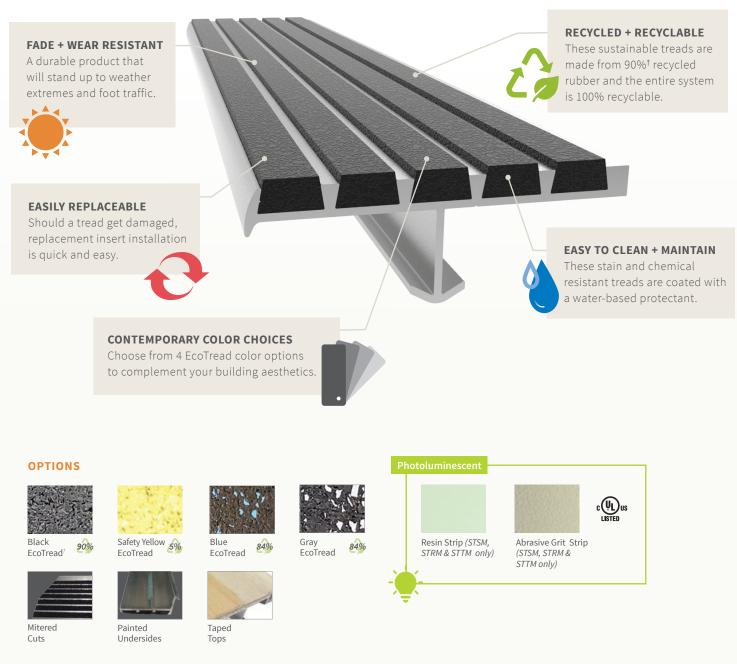

Colors shown give only an indication of shade. Samples are available upon request. '90% recycled rubber available in Black EcoTread only. All other recycled content noted by color swatches.

## **Ribbed Abrasive**

STAIR TREADS + NOSINGS

#### MODELS

MODEL	WIDTH	NOSING	TREAD INSERT	INSTALL	
STSB-C1.875E-ECO	1-7/8"	Short	EcoTread	Cast-In, Extruded Anchor	
STSB-C1.875D-ECO	1-7/8" Short		EcoTread	Drilled Hole, Mech. Fastened	
STSB-P1.875E-ECO	1-7/8"	Short Tipped	EcoTread	Cast-In, Extruded Anchor	
STSB-P1.875D-ECO	1-7/8"	Short Tipped	EcoTread	Drilled Hole, Mech. Fastened	
STSB-L1.875E-ECO	1-7/8"	Long	EcoTread	Cast-In, Extruded Anchor	
STSB-L1.875D-ECO	1-7/8"	Long	EcoTread	Drilled Hole, Mech. Fastened	
STSB-A1.875D-ECO	1-7/8"	Angled Long	EcoTread	Drilled Hole, Mech. Fastened	
STSB-C3E-ECO	3"	Short	EcoTread	Cast-In, Extruded Anchor	
STSB-C3D-ECO	3"	Short	EcoTread	Drilled Hole, Mech. Fastened	
STSB-P3E-ECO	3"	Short Tipped	EcoTread	Cast-In, Extruded Anchor	
STSB-P3D-ECO	3"	Short Tipped	EcoTread	Drilled Hole, Mech. Fastened	
STSB-L3E-ECO	3" Long		EcoTread	Cast-In, Extruded Anchor	
STSB-L3D-ECO	3" Long		EcoTread	Drilled Hole, Mech. Fastened	
STSB-A3E-ECO	3"	Angled Long	EcoTread	Cast-In, Extruded Anchor	
STSB-A3D-ECO	3"	Angled Long	EcoTread	Drilled Hole, Mech. Fastened	
STSB-C4E-ECO	4"	Short	EcoTread	Cast-In, Extruded Anchor	
STSB-C4D-ECO	4"	Short	EcoTread	Drilled Hole, Mech. Fastened	
STSB-P4E-ECO	4"	Short Tipped	EcoTread	Cast-In, Extruded Anchor	
STSB-P4D-ECO	4" Short Tipped		EcoTread	Drilled Hole, Mech. Fastened	

### Safe-T-Lume<sup>™</sup> STAIR TREADS + NOSINGS

#### MODELS

MODEL	WIDTH	NOSING	TREAD/INSERT	INSTALL	
STSM-P3E-ECO	3"	Short Tipped	EcoTread and Photoluminescent	Cast-In, Extruded Anchor	
STSM-P3D-ECO	3"	Short Tipped	Resin Strip	Drilled Hole, Mech. Fastened	
STSM-P3E-T-ECO	3"	Short Tipped	EcoTread and	Cast-In, Extruded Anchor	
STSM-P3D-T-ECO	3"	Short Tipped	Photoluminescent Abrasive Grit Strip	Drilled Hole, Mech. Fastened	

### Safe-T-Lume<sup>™</sup> Two-Part

STAIR TREADS + NOSINGS

#### RIBBED MODELS

MODEL	WIDTH	TREAD	INSTALL
STTM-P3.375E-ECO	3-3/8"	EcoTread and Photoluminescent Resin Strip	Cast-In, Extruded Anchor
STTM-P3.375E-T-ECO	3-3/8"	EcoTread and Photoluminescent Abrasive Grit Strip	Cast-In, Extruded Anchor

### Renovation

#### STAIR TREADS + NOSINGS

#### MODELS


MODEL	WIDTH	NOSING	TREAD	INSTALL	
STRB-L5D-ECO	5"	Long	EcoTread	Drilled Hole, Mech. Fastened	
STRB-L9D-ECO	9"	Long	EcoTread	Drilled Hole, Mech. Fastened	
STRB-L11D-ECO	11" Long		EcoTread	Drilled Hole, Mech. Fastened	
STRB-A5D-ECO	5"	Angled Long	EcoTread	Drilled Hole, Mech. Fastened	
STRB-A9D-ECO	9"	Angled Long	EcoTread	Drilled Hole, Mech. Fastened	
STRB-A11D-ECO	11"	Angled Long	EcoTread	Drilled Hole, Mech. Fastened	




Ribbed Bar Abrasive STSB-P3E-ECO shown



Safe-T-Lume™ STSM-P3E-ECO shown



Two-Part STTM-P3.375E-ECO shown



## Safe-T-Lume<sup>™</sup> Renovation

STAIR TREADS + NOSINGS

#### MODELS

MODEL	WIDTH	NOSING	TREAD/INSERT	INSTALL	
STRM-L5D-ECO	5"	Long	EcoTread and	Drilled Hole, Mech. Fastened	
STRM-A5D-ECO	5"	Angled Long	Photoluminescent Resin Strip	Drilled Hole, Mech. Fastened	
STRM-L5D-T-ECO	5"	Long	EcoTread and	Drilled Hole, Mech. Fastened	
STRM-A5D-T-ECO	5"	Angled Long	Photoluminescent Abrasive Grit Strip	Drilled Hole, Mech. Fastened	


# 

STAIR TREADS + NOSINGS


#### **RIBBED MODELS**

MODEL	WIDTH	TREAD	INSTALL
STSB-N1.375D-ECO	1-3/8"	EcoTread	Drilled Hole, Mech. Fastened
STSB-N1.375E-ECO	1-3/8"	EcoTread	Cast-In, Extruded Anchor
STSB-N3D-ECO	3"	EcoTread	Drilled Hole, Mech. Fastened
STSB-N3E-ECO	3"	EcoTread	Cast-In, Extruded Anchor

### **System Features**



Safe-T-Lume™ Rennovation STRM-L5D-ECO shown



Inset STSB-N1.375D-ECO shown

TREAD TYPE	FADE & WEAR RESISTANT	EASY TO CLEAN & MAINTAIN	PHOTOLUMINESCENT STRIPS	RECYCLED MATERIAL	REPAIRABLE	REPLACEABLE
Ribbed Aluminum with EcoTread™	<b>/</b>	<ul> <li>✓</li> </ul>	<ul> <li>✓</li> </ul>	<ul> <li>✓</li> </ul>	<b>~</b>	<b>/</b>
Ribbed Aluminum with Abrasive Grit	<ul> <li>✓</li> </ul>	No	<ul> <li></li> </ul>	No	~	✔ With difficulty
Cast Aluminum	Grit will wear over time	<ul> <li></li> </ul>	No	No	Full replace required	Full replace required



9300 73rd Avenue North Minneapolis, MN 55428

Phone (800) 547-2635 Fax (866) 900-1959



nystrom.com

ECOTREAD FLYER 05/23