**SPECIFICATIONS:**

① DOOR:
ALUMINUM 1/4" DIAMOND PLATE, MILL FINISH WITH A LIVE LOAD OF 250PSF WITH A MAX SPAN DEFLECTION OF L/150

② FRAME:
ALUMINUM, 1/4" EXTRUSION, GRAY PRIMER FINISH ON EXTERIOR SURFACES THAT COME INTO CONTACT WITH CONCRETE

③ HINGES: TYPE 316 STAINLESS STEEL

④ SLAM LATCH:
ZINC-PLATED STEEL WITH INSIDE HANDLE MECHANISM AND OUTSIDE REMOVABLE HANDLE

⑤ COUNTER-BALANCE SPRING:
ENCLOSED, TYPE 17-7 SST SPRING

⑥ HOLD-OPEN ARM: TYPE 316 STAINLESS STEEL

OPTIONAL SELF-CLOSING MECHANISM

⑦ ANCHOR: BOLT-ON ANCHOR STRAPS PROVIDED


⑧ PLUG SEAL: TYPE 316 STAINLESS STEEL



CERTIFICATION: 2-HOUR FIRE RATED, WARNOCK HERSEY LABELED AND TESTED TO NFPA 288: STD METHODS OF FIRE TEST OF HORIZONTAL FIRE DOOR ASSEMBLIES. MAX TEMPERATURE RISE OF 250F.

APPLICATION NOTE: FLOOR DOOR MUST BE KEPT DRY BEFORE, DURING, AND AFTER INSTALLATION. FOR DRY, INTERIOR INSTALLATION ONLY. NOT INTENDED FOR EXTERIOR OR WET ENVIRONMENTS OR FOR FREQUENT EGRESS. UNITS LARGER THAN 36" X 36" MAY REQUIRE TWO PEOPLE TO OPERATE SAFELY.


FLOOR DOOR SIZE:

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED. ©2020 NYSTROM, INC.

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:			
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:	
		FD, 2hr Fire Rated, 250 psf, Sngl Dr, Alum, 1/4" Dmd Plt, Mill, Angle Frame, Gray Primer, Cast-In, SST Spring Asst, 316 SST HDW, Slam Latch w/Hdl	
NAME	DATE	SIZE	DWG. NO.
DRAWN	BES		A
RELEASED	BES		WIGHT:
			REV
			SHEET 1 OF 2

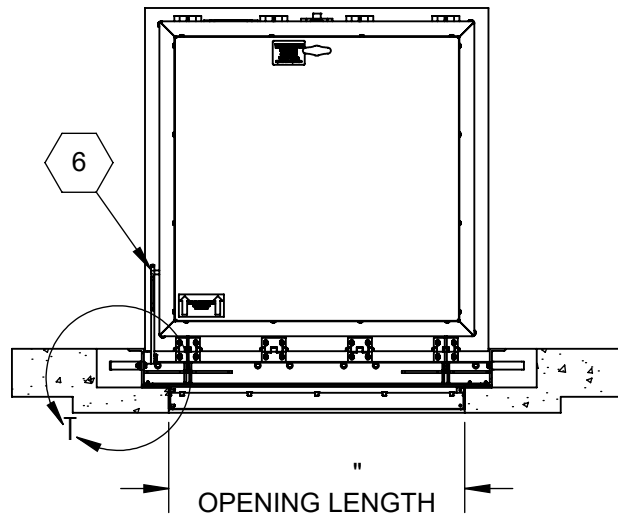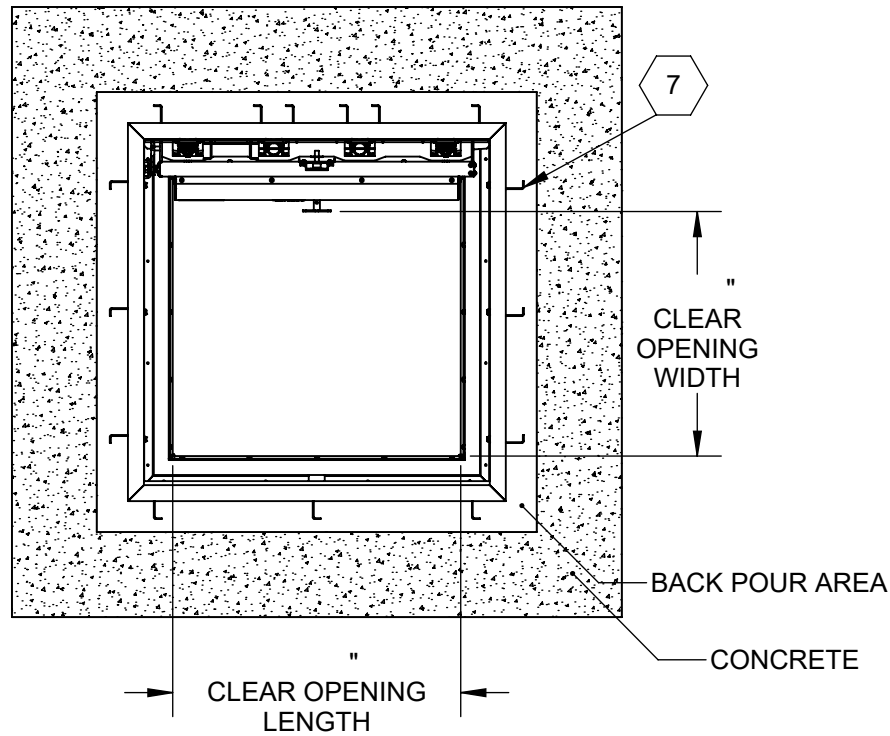

8"
MIN. DEPTH
REQUIRED TO
RETAIN FIRE
RATING


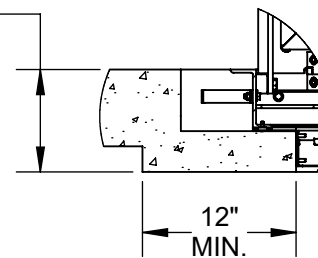


**CAST-IN
DETAIL**



9300 73rd Avenue North
Minneapolis, MN 55428

	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	BES		A	Nystrom FD FDFPA_X_SWL ShpDr	
RELEASED	BES		WEIGHT:	SHEET 2 OF 2	

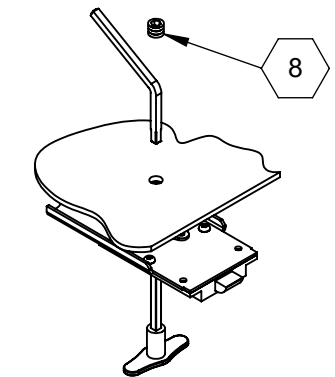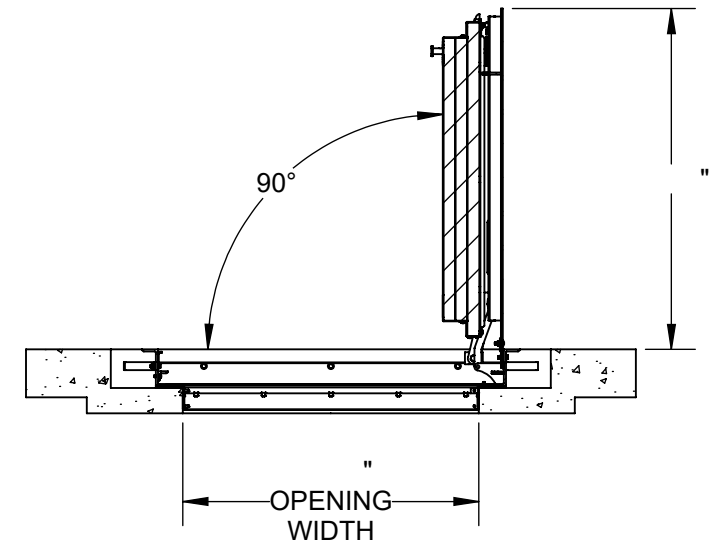

SLAM LATCH DETAIL

TITLE: FD, 2hr Fire Rated, 250 psf,
, Sngl Dr, Alum, 1/4" Dmd Plt,
Mill, Angle Frame, Gray Primer, Cast-In,
SST Spring Asst, 316 SST HDW, Slam Latch w/Hdl