



2














DETAIL D
DRYWALL BEAD DETAIL
SCALE 1:4

ROUGH OPENING: W + 0.25" x H + 0.25" CLEAR OPENING: W - 2.375" x H - 1.125"

DEGREE OF OPENING: 120°

NOTES:

1 FRAME: Cold Rolled Steel 16 ga, Drywall Bead

2 DOOR: Cold Rolled Steel, 14 ga

(3) **FINISH:** White Powder Coat


4 HINGE: Concealed Pin Hinge

 $\overline{\langle 5 \rangle}$ **SECONDARY LATCH:** Varies

 $\overline{(6)}$ **LOCK:** Knurled Knob/Keyed Slam Latch

PROJECT: ARCHITECT: CONTRACTOR: QTY: PART#: DWK TITLE: Access Door, Non-Rated WxH, Uninsulated CRS, Flush Dr, Drywall Flg 9300 73rd Avenue North Brooklyn Park, MN 55428 NAME DATE SIZE DWG. NO. REV DWK ShpDr Α DRAWN RELEASED WEIGHT: VARIES SHEET 1 OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

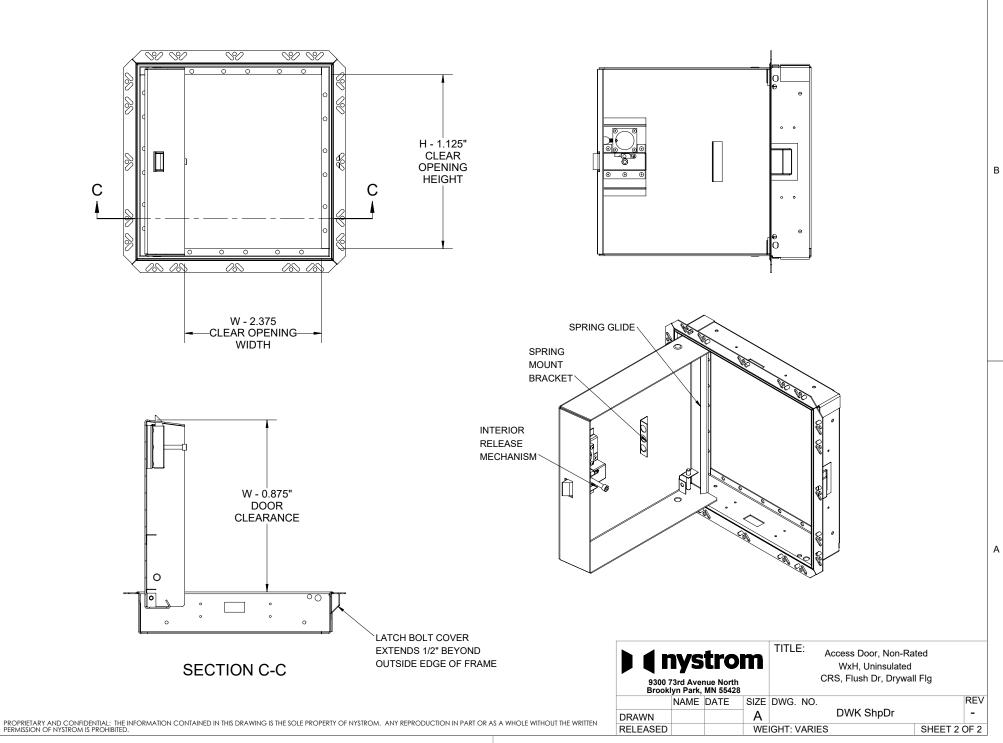

В