



Wing Infill

FLOORING SYSTEM (SA/DA)

Nystrom's Single Wing and Double Wing Flooring Infill System is designed to cover thermal expansion joint openings. Constructed of aluminum and designed to integrate with carpet, tile and VCT flooring, this system provides a minimal 1-1/2 inch sight line.

FEATURES

COORDINATE WITH FLOORING Seamless integration with existing VCT, carpet and tile flooring.

DOUBLE WING OPTION Add a double sight line to coordinate with a matching wall system.

ADA COMPLIANT This system is not a trip hazard as the no bump design provides a finished flush floor transition.

DETAILS

MATERIAL 6063-T6 Aluminum

FINISH Mill

MOVEMENT

- Thermal: Horizontal

MOUNTING Surface


JOINT SIZE Up to 2 inches

LENGTH 10 Linear Feet


LOAD Pedestrian and Light Cart

INSTALLATION Floor

OPTIONS Moisture Barrier, Fire Barrier

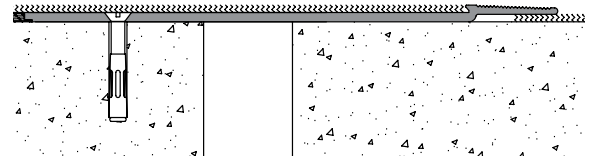

Single Wing Floor-to-Floor

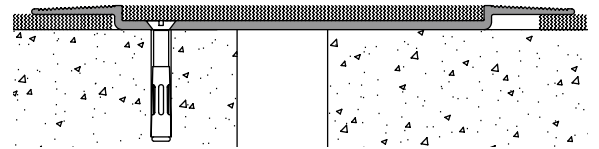

Double Wing Floor-to-Floor

MODELS

SINGLE WING

MODEL	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT-LINE	FLOOR INFILL HEIGHT	TOTAL MOVEMENT
SA150-125	2" (51mm)	1.5" (38mm)	0.125" (3mm)	1" (25mm)
SA150-250	2" (51mm)	1.5" (38mm)	0.25" (6mm)	1" (25mm)
SA150-375	2" (51mm)	1.5" (38mm)	0.375" (10mm)	1" (25mm)

DOUBLE WING

MODEL	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT-LINE	FLOOR INFILL HEIGHT	TOTAL MOVEMENT
DA150-125	2" (51mm)	4" (102mm)	0.125" (3mm)	1" (25mm)
DA150-250	2" (51mm)	4" (102mm)	0.25" (6mm)	1" (25mm)
DA150-375	2" (51mm)	4" (102mm)	0.375" (10mm)	1" (25mm)