


2

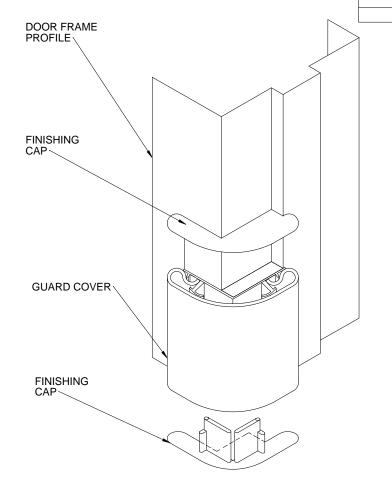

COLOR

В

LENGTH

QUANTITY

NOTES:

1. **PROFILE**: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.100" (2.54mm) THICK

- 2. CLASS A FIRE RATING, TESTED TO ASTM E84
- 3. RETAINER: CONTINUOUS 6063 T-5 ALUMINUM, NOMINAL 0.060" (1.52mm) THICK
- 4. **EXTRUSION**: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- 5. MAXIMUM LENGTH: VINYL CORNER GUARDS 20'
- 6. **HARDWARE**: #6 X 1-5/8" DRYWALL SCREWS INCLUDED
- 7. PARTITION COMPONENTS PROVIDED BY OTHERS. FINISHED LENGTH INCLUDES END CAPS.

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

F	PROJEC	CT:					
ARCHITECT:							
CONTRACTOR:							
9300 73rd Avenue North Minneapolis, MN 55428				TITLE: DOOR FRAME GUARD 2 11/16" X 2 11/16", 1 1/4" RADIUS			
	NAME	DATE	SIZE	DWG. NO.			REV
DRAWN	MDS	05SEP12	Α	DGV26875 A			
RELEASED PGE 190CT12 WEI				IGHT: 4.31 lbs/ft		SHEET 1 OF 1	

2

1