

Architectural Aluminum Anti-Slip

FLOORING SYSTEM (DT)

The Nystrom DT Anti-Slip interior cover system is capable of thermal or multi-directional movement. Easily installs on the surface of the floor directly to the substrate without the requirement of preformed block outs.

FEATURES

ANTI-SLIP SURFACE Designed with serrations to create an anti-slip surface.

EASY INSTALLATION Surface mount - no block out required. Simply attach to subfloor with appropriate fasteners.

OPTIONAL FIRE BARRIER Add an optional fire barrier to install under the cover plate. See pages 43-45 for options.



DETAILS

MATERIAL 6063-T6 Aluminum

FINISH Mill

MOVEMENT

- Thermal: Horizontal

MOUNTING Surface


JOINT SIZE 1 inch to 6 inches

LENGTH 10 Linear Feet

LOAD Pedestrian and Light Cart

INSTALLATION Floor

OPTIONS Sound Dampening Gasket, Moisture Barrier, Fire Barrier

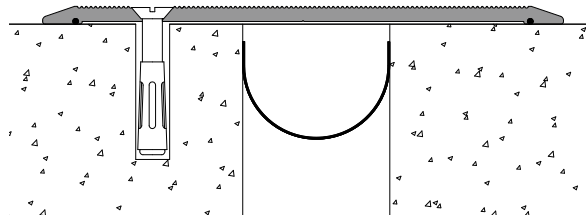

MODELS

MODEL	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
DT-100	1" (25mm)	4" (102mm)	1.65" (42mm)
DT-200	2" (51mm)	6" (152mm)	2.9" (74mm)
DT-300	3" (76mm)	8.5" (216mm)	5.65" (144mm)
DT-400	4" (102mm)	10" (254mm)	6.65" (169mm)
DT-600	6" (152mm)	11.5" (292mm)	8.65" (220mm)

Additional sizes available, call for more information.