


ITEM NO. PART NUMBER DESCRIPTION QUANTITY 27496-4.00-Y RAIL, 1-1/4" X 4.00L, 10 2 20 27496-18.00-Y RAIL, 1-1/4" X 18.00L, 1 30 27496-48.50-Y RAIL, 1-1/4" X 48.50L, 4 PKG, CORNER POST, ALUM 500 27180-A-Y 4 510 27185 FTG, ELBOW, 5 27188 FTG, TEE, 3 515 FTG, CROSS ELBOW, 520 27186 1 FTG, DBL TEE, 525 27231 1 GATE, 30, SRCA-GATE-30 1 575

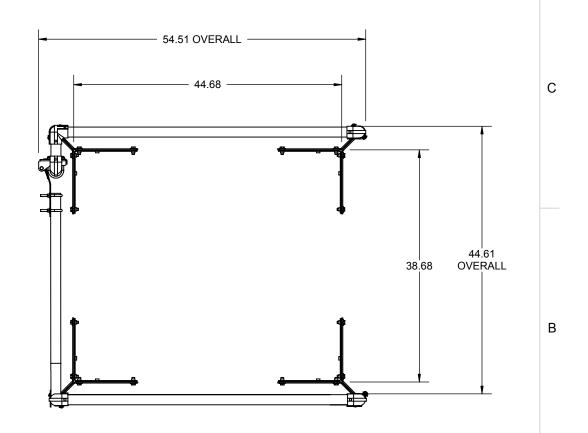

SPECIFICATIONS

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 1/4" TUBULAR ALUMINUM SELF CLOSING WITH COIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEEL BACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 36" X 30"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.23 GUARDING FOR OPENINGS REQUIREMENTS; SUPPORTS 200 LBS. FORCE

FINISH: SAFETY YELLOW POWDER COAT PAINT

SRBAY36X30FG

	9300 73rd Avenue North Minneapolis, MN 55428			Safety Railings for Roof Hatch 36X30, Front Exit, Therm-Brokn Aluminum, Safety Yellow Pwd, Self-Closing Gate, 3" Curb,				
		NAME	DATE	SIZE	DWG. NO.			REV
D.	DRAWN	SJB	TODAY	В	SRBAY36X30FG HT: Weight SHEET 1 OF 1		Α	
	RELEASED	DWO	7/22/2020					
	2				2		4	

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED ©2020 NYSTROM, INC.

5

D

3