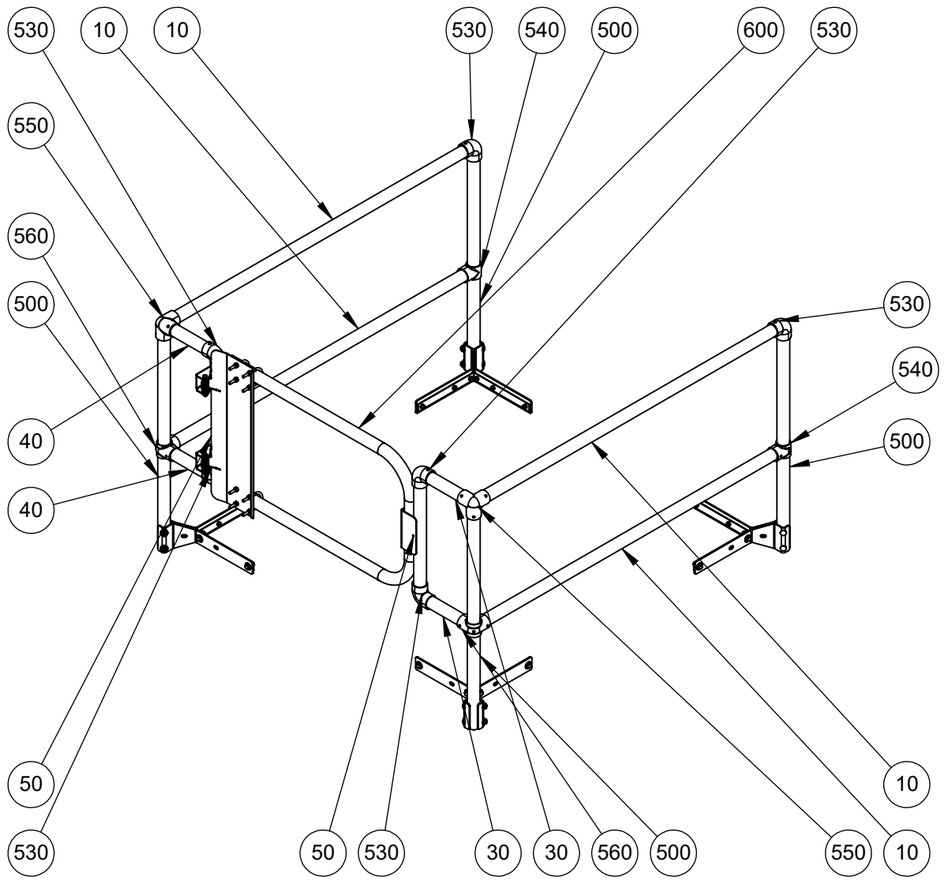

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
10	27496-55.75-Y	RAIL, 1-1/4" X 55.75L, ALUM	4
20	-	-	-
30	27496-8.00-Y	RAIL, 1-1/4" X 8.00L, ALUM	2
40	27496-8.00-Y	RAIL, 1-1/4" X 8.00L, ALUM	2
50	27496-18.00-Y	RAIL, 1-1/4" X 18.00L, ALUM	2
60	-	-	-
500	27180-A-Y	PKG, CORNER POST, ALUM,	4
510	-	-	-
520	-	-	-
530	27185	FTG, ELBOW,	6
540	27188	FTG, TEE,	2
550	27231	FTG, DBL TEE,	2
560	27186	FTG, CROSS ELBOW,	2
570	-	-	-
580	-	-	-
590	-	-	-
600	SRCAY-GATE-30	GATE, 30,	1

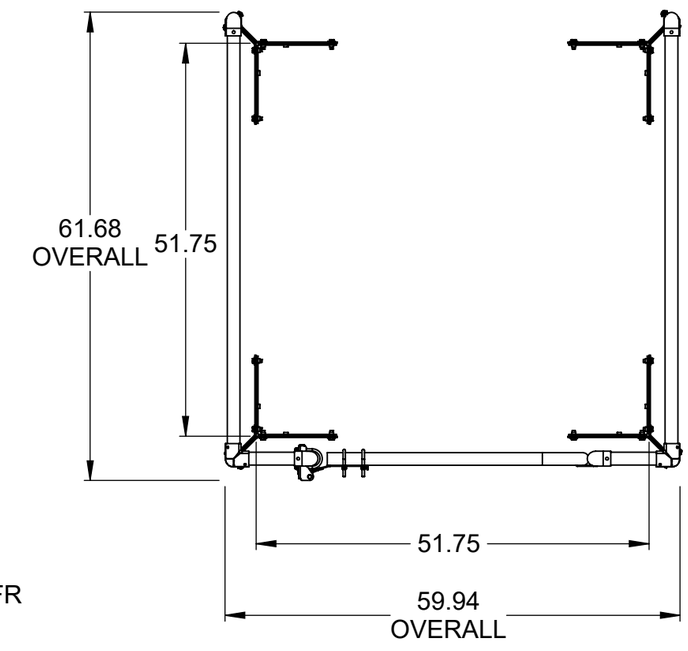

SPECIFICATIONS

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 1/4" TUBULAR ALUMINUM SELF CLOSING WITH COIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEELBACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 48" X 48"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.28 AND 1910.29 REQUIREMENTS

FINISH: SAFETY YELLOW POWDER COAT

SRCAY48X48FG

nystrom
9300 73rd Avenue North
Minneapolis, MN 55428

TITLE:
Safety Railings for Roof Hatch
48x48, Front Exit,
Aluminum, Safety Yellow Pwd, Self Closing Gate,

	NAME	DATE
DRAWN	DWO	9/4/2025
RELEASED	DWO	9/4/2025

SIZE B | DWG. NO. Nystrom SRCAY48X48FG | REV A
WEIGHT: 76.9 | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.