

SPECIFICATIONS:

- (1) DOOR: ALUMINUM, 1/4" DIAMOND PLATE, MILL FINISH WITH A LIVE LOAD OF 300 PSF AND MAX SPAN DEFLECTION OF L/150
- (2) FRAME: ALUMINUM, 1/4" EXTRUSION, GRAY PRIMER FINISH ON EXTERIOR SURFACES THAT COME IN CONTACT WITH CONCRETE
- (3) HINGES: TYPE 316 STAINLESS STEEL
- (4) SLAM LATCH: TYPE 316 STAINLESS STEEL WITH INSIDE LEVER HANDLE AND OUTSIDE HANDLE
- (5) COUNTER-BALANCE SPRING: ENCLOSED, TYPE 17-7 SST SPRING
- (6) HOLD-OPEN ARM: TYPE 316 STAINLESS STEEL WITH RED VINYL GRIP HANDLE

- **(7) DRAINAGE COUPLING:** 1-1/2"
- (8) FLUSH TYPE PLUG SEAL: TYPE 316 STAINLESS STEEL
- 9 GASKET: EPDM GASKET
- (1) SAFETY GRATE: ALUMINUM, 6" SERRATED RAILS WITH SAFETY ORANGE POWDER COAT, LIVE LOAD OF 300 PSF, SST HINGES AND INTEGRAL PADLOCK HASP
- (11) NUT-RAIL: ALUMINUM NUT-RAIL ON HINGE AND LATCH SIDES

PROJECT: ARCHITECT: CONTRACTOR: QTY: PART#: TITLE: nystrom Floor Door, Drainable Series, Dbl Dr, 316 SST Hdw, Alum, Mill, Pedestrian, Cast-In, Slam Latch Removbl L Hdl, Safety Grate 9300 73rd Avenue North Minneapolis, MN 55428 SIZE DWG. NO. REV NAME DATE Nystrom FD FDDPA_X_DFL-SGT ShpDr Α Α DRAWN 04/27/18

WEIGHT: 224 LB

SHEET 1 OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED. THIS SHOP DRAWING MAY NOT BE AN ACTUAL REPRESENTATION OF THE FINAL PRODUCT.


2

1

04/27/18

RELEASED

TR

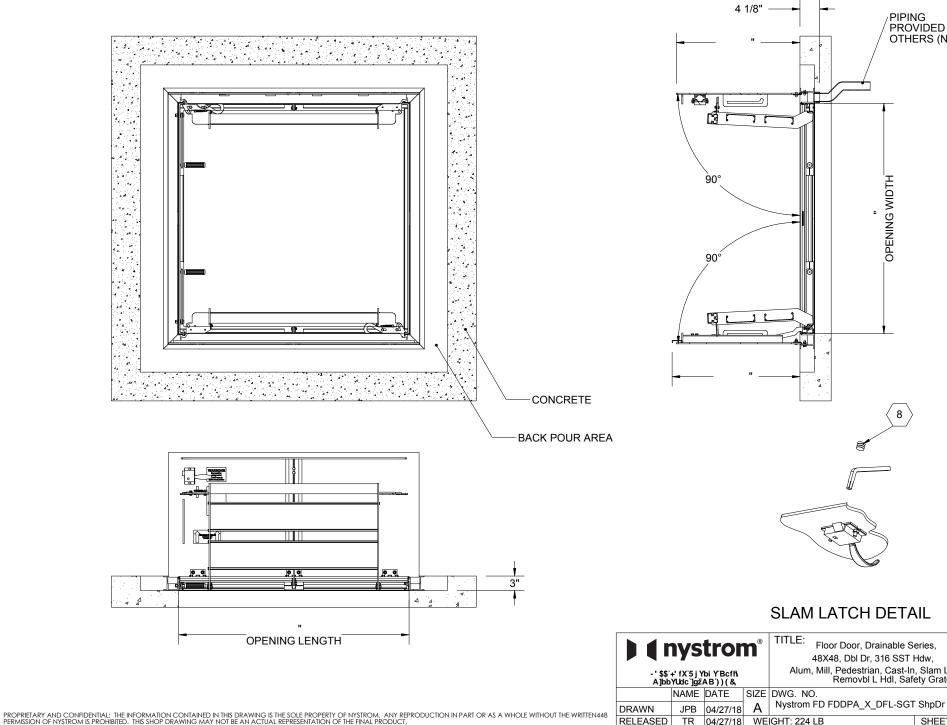

RELEASED

TR

04/27/18

WEIGHT: 224 LB

PIPING PROVIDED BY OTHERS (NIC) OPENING WIDTH SLAM LATCH DETAIL Floor Door, Drainable Series, 48X48, Dbl Dr, 316 SST Hdw, Alum, Mill, Pedestrian, Cast-In, Slam Latch Removbl L Hdl, Safety Grate

REV

Α

SHEET 2 OF 2