

SPECIFICATIONS:

(7) DOOR:
304 SST, 3/16" DIAMOND PLATE, BEAD BLAST FINISH WITH A
LIVE LOAD OF 300 PSF WITH A MAX SPAN DEFLECTION OF 1/150
ANCHOR: 3/8" HOLES PROVIDED FOR BOLT IN ON SITE,
ANCHORS PROVIDED BY OTHERS

304 SST, 3/16" FORMED SMOOTH PLATE, BEAD BLAST FINISH

(3) HINGES: TYPE 316 STAINLESS STEEL

 $\langle \overline{4} \rangle$ SLAM LATCH:

TYPE 316 STAINLESS STEEL WITH INSIDE LEVER HANDLE AND

OUTSIDE REMOVABLE HANDLE (5) COUNTER-BALANCE SPRING:

ENCLOSED, TYPE 17-7 SST SPRING

(6) HOLD-OPEN ARM:

TYPE 316 STAINLESS STEEL WITH RED VINYL GRIP HANDLE

(7) DRAINAGE COUPLING: 1-1/2"


FLOOR DOOR SIZE:

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

PROJECT:						
ARCHITECT:						
CONTRACTOR:						
QTY:						
PART#:						
9300 73rd Avenue North, Minneapolis, MN 55428				TITLE: Floor Door, Drainable Series, Sngl Dr, 316 SST Hdw, 304 SST, Bead Blast, Pedestrian, Bolt-In, Slam Latch Removbl L Hdl		
	NAME	DATE	SIZE	DWG. NO. Nystrom FD FDDPS X SWL-B	ll ShnDr	REV A
DRAWN	SWS	8/3/2018	Α	Nystioni i b i b b F 3_X_3 W L-b i 3 lipbi A		
RELEASED	TR	8/3/2018	WE	IGHT:	SHEET 1	OF 2

5



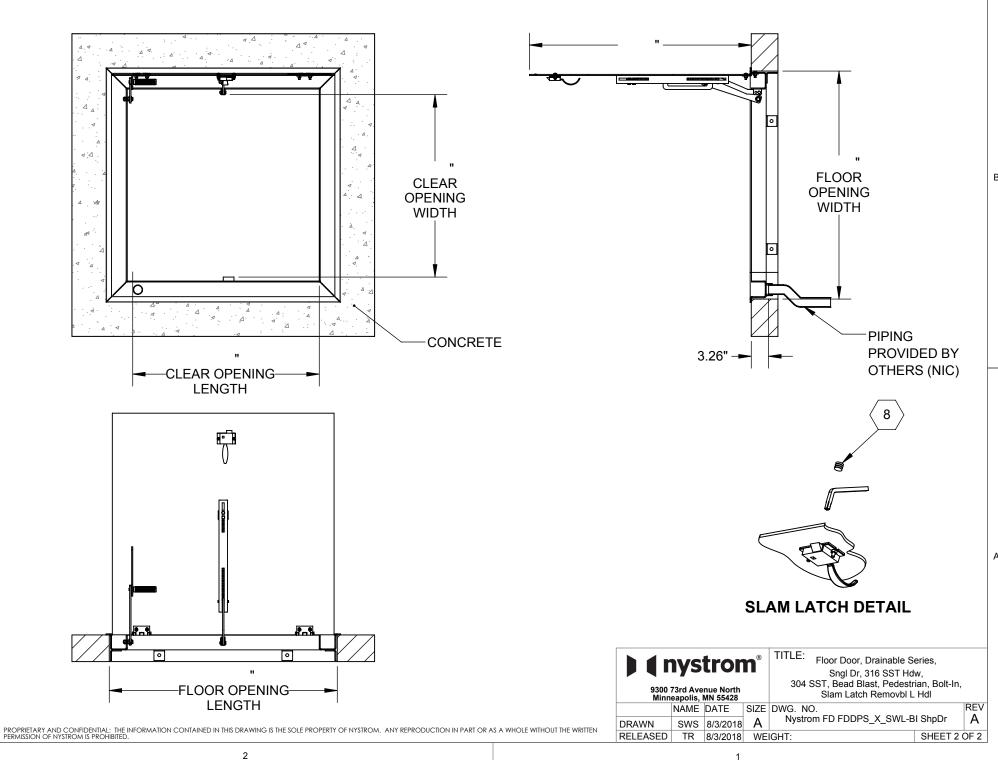

В