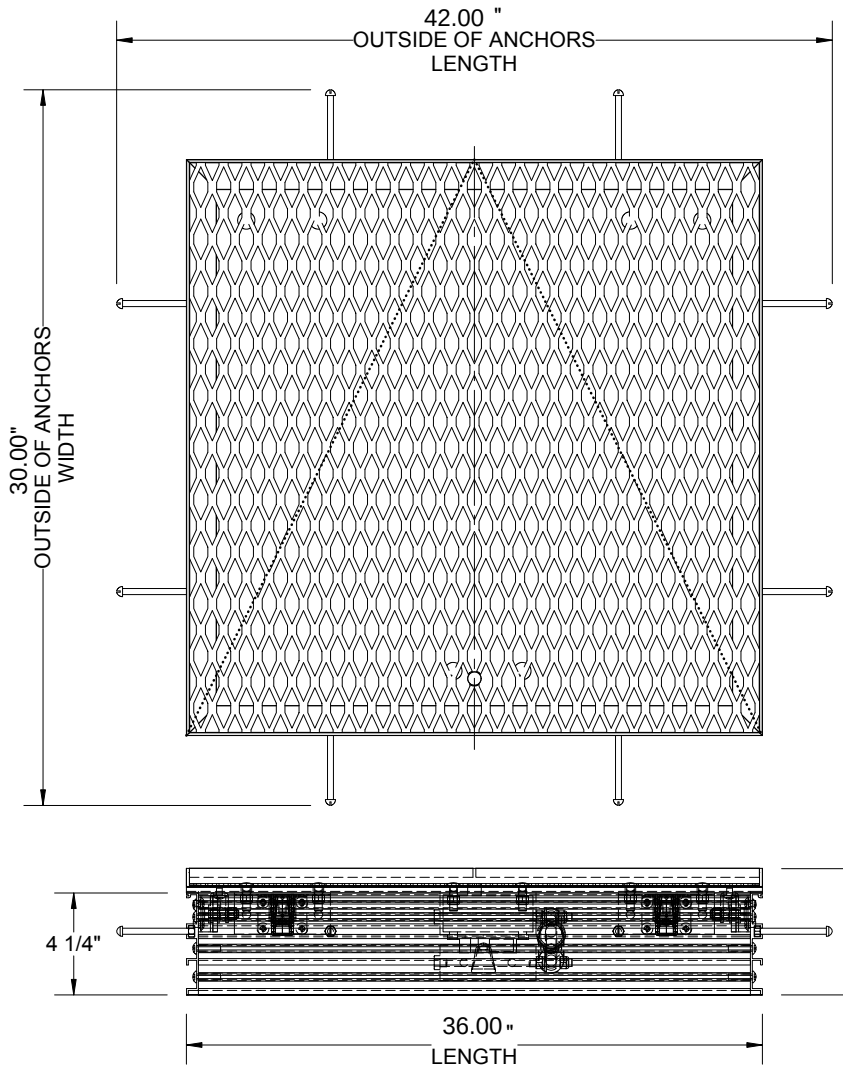

For dry, interior installation only. Not intended for wet or exterior environments.

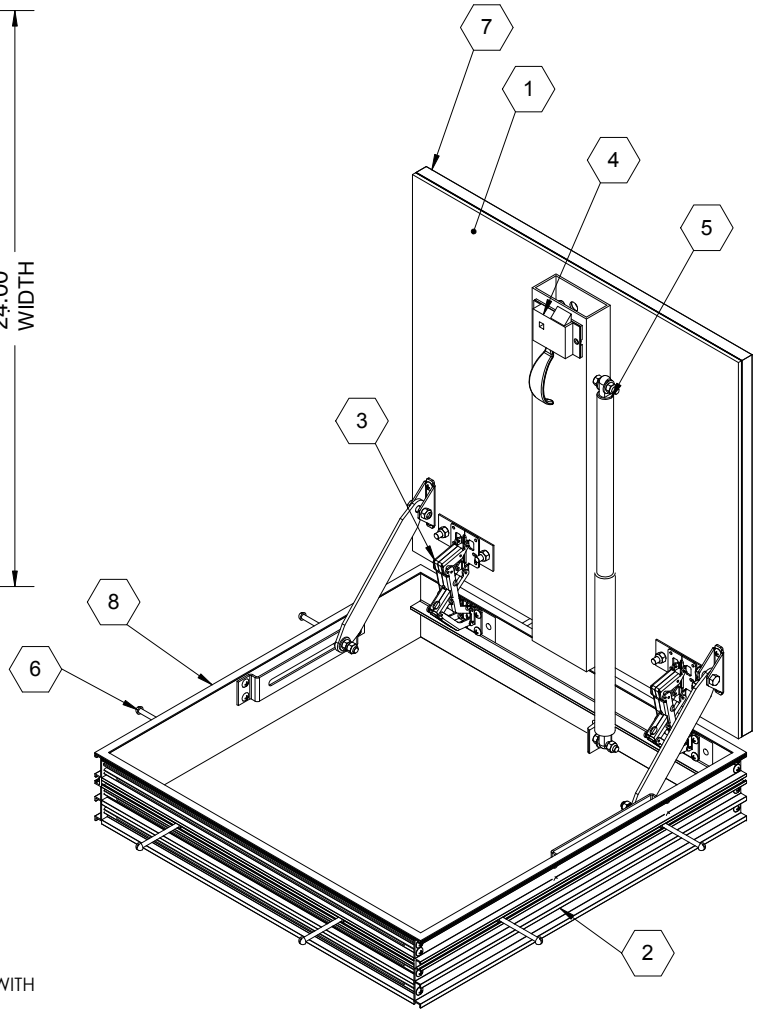

SPECIFICATIONS:

1. **DOOR:** ALUMINUM, 1/4" SMOOTH PLATE, MILL FINISH WITH A LIVE LOAD OF 300 PSF WITH A MAXIMUM DEFLECTION OF L/160
2. **FRAME:** ALUMINUM, F-2C EXTRUSION, PRIMER COAT FINISH ON EXTERIOR SURFACES THAT COME IN CONTACT WITH CONCRETE
3. **HINGES:** CABINET STYLE LIFT HINGE, SPRING LOADED NICKLE PLATED
4. **SLAM LATCH:** TYPE 316 STAINLESS STEEL WITH INSIDE LEVER HANDLE AND OUTSIDE REMOVABLE 5/16" SQUARE L-HANDLE
5. **COUNTER-BALANCE SPRING:** DAMPENED GAS SPRING WITH INTEGRATED HOLD OPEN MECHANISM, BLACK NITRIDE FINISH
6. **ANCHOR:** BOLT ON FORMED ANCHORS PROVIDED
7. **TILE EXTRUSION:** ALUMINUM EXTRUSION RECESSED 3/4" WITH EXPANDED METAL MESH BASE FOR CONCRETE. MESH IS REMOVABLE FOR WOOD OR RUBBER FILL.
8. **GASKET:** EPDM, ON FRAME AROUND PERIMETER

- (●) (WT1) Terrazzo Tile Fill, 3-7 lbs/ft2
- ( ) (WT2) Concrete Fill, 145 lbs/ft3
- ( ) (WT3) Wood Fill, 25-50 lbs/ft3
- ( ) (WT4) Rubber Fill, 95 lbs/ft3

FLOOR DOOR SIZE: 24" (WIDTH) x 36" (LENGTH)
CLEAR UNOBSTRUCTED OPENING: 18" (WIDTH) x 33" (LENGTH)
OPENING: 24.13" (WIDTH) x 36.13" (LENGTH)

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

PROJECT:	
ARCHITECT:	
CONTRACTOR:	
QTY:	
PART#:	FDPPA24X36SAL

nystrom®
9300 73rd Avenue North
Minneapolis, MN 55428

TITLE: Floor Door, Non-Drainable, 24X24, Sngl Dr, Corrosion Resistant Hdw, Alum, Mill, Pedestrian, Cast-In Anchors, Slam Latch Removbl L Hdl, 1" Recessed Pan

	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	JPB	2-10-17	A	Nystrom FD FDPPA_X_SAL ShpDr	A
RELEASED	TR	2-10-17	WEIGHT: TBD		SHEET 1 OF 1