
40





2

QTY.	MODEL	WIDTH	LENGTH	LOCATION

RECESS OPENING DIMENSIONS:

WIDTH X _ LENGTH

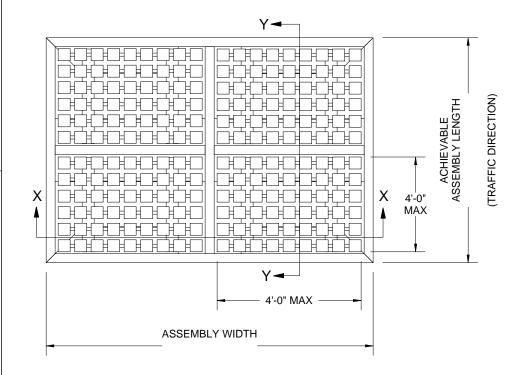

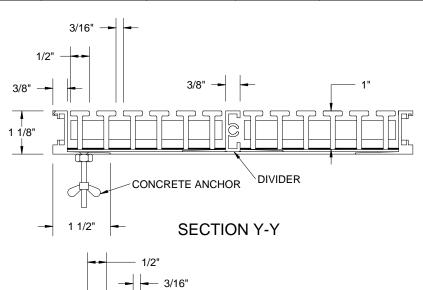

В

SECTION X-X

8" MAX

CONCRETE ANCHOR

- MAXIMUM GRATE SECTION SIZE NOT TO EXCEED 48" X 48"
 GRATE MUST BE INSTALLED IN A LEVEL BED RECESS
 RAILS ARE 6061-T6 ALUMINUM ALLOY; FRAMES ARE 6063-T6 ALUMINUM ALLOY
- TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION
- DESIGN CLEARANCE BETWEEN GRATE AND FRAME IS 1/8"
- ACTUAL ACHIEVEABLE GRATE LENGTH IS DEPENDANT ON BOTH NUMBER AND SIZE OF SECTIONS
- SITE OPENING LENGTH MUST BE ADJUSTED TO GRATE AND FRAME ACHIEVABLE LENGTH
- ADDITIONAL INFORMATION CAN BE FOUND IN THE PRODUCT SPECIFICATION AND IS CONSIDERED PART OF THIS TRANSMITTAL

PROJECT: ARCHITECT: CONTRACTOR: QTY: GL10W PART#: FL10LBC TITLE: AlumaGRIL Grate Level Bed Cast In Frame 9300 73rd Avenue North Minneapolis, MN 55428 Waffle Cut Grate NAME DATE SIZE DWG. NO. REV Nystrom EFS GL10W-LBC ShpDr Α Α DRAWN 01/12/18

DIVIDER

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

01/12/18

WEIGHT:

RELEASED

DT