





GP34


QTY	MODEL	WIDTH	LENGTH	FINISH	LOCATION

B

B

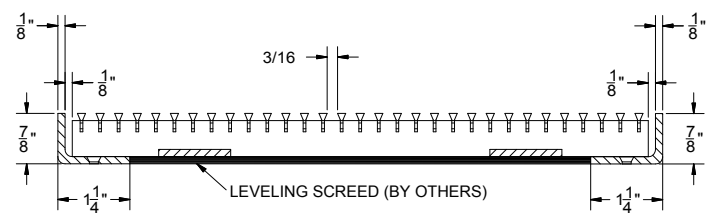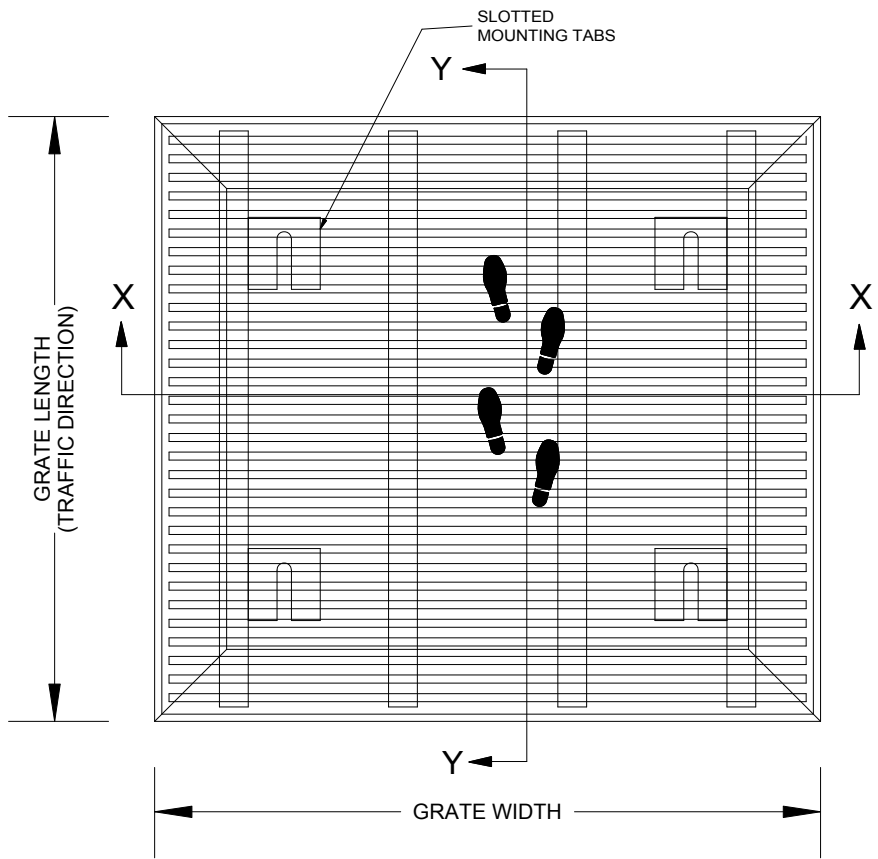

SECTION Y-Y

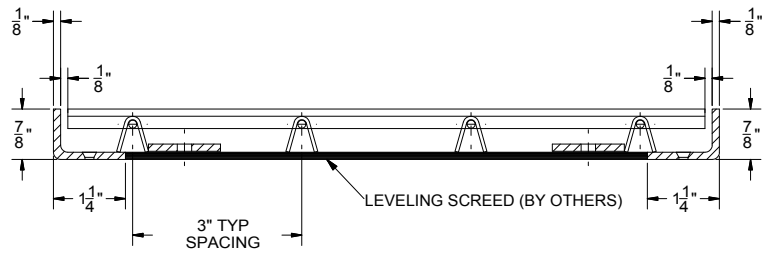

SECTION X-X

A

A

NOTES:

- FRAME ANCHOR SPACING: 6" FROM CORNERS, 24" MAX
- ALL RAIL COMPONENTS ARE MADE OF TYPE 304 STAINLESS STEEL, ALL FRAME COMPONENTS ARE MADE OF TYPE 304 STAINLESS STEEL.
- NON-WELDED MECHANICALLY INTERLOCKED CONSTRUCTION.
- GRATE IS MADE WITH .187" X .125" (3.6mm X 3.2mm) STAINLESS STEEL WIRE SPACED .1875 (4.8mm) O.C. AND WELDED SUPPORT RODS SPACED 3" (76.2mm) O.C.
- ADDITIONAL INFORMATION CAN BE FOUND IN THE PRODUCT SPECIFICATION AND IS CONSIDERED PART OF THIS TRANSMITTAL.
- FRAME PART NUMBER: FP34LBM

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
			DESCRIPTION: ProGril, 3/4", Stainless Steel, Grate with 1-1/4" x 1/8", Mechanically Fastened, Stainless Steel Frame		
DRAWN	DKL	7/24/14	A		
RELEASED	PE	7/24/14	SCALE: NTS	SHEET 1 OF 1	REV A

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.