

Seismic Elastomeric CEILING SYSTEM (LCE/W)



Nystrom's Seismic Elastomeric Ceiling System uses an aluminum channel attached to the grid system above the sight line. The finished Santoprene seal comes in four colors to match your surrounding substrate and finish material. This system accommodates seismic movement.

FEATURES

ACOUSTIC CEILING Fully integrated with suspended ceiling grid system.

MAXIMUM MOVEMENT Deep "V" design allows for maximum thermal and seismic movement.

COMPLEMENTARY SEAL COLORS Available in four elastomeric seal color options: beige, white, gray or black.

DETAILS

MATERIAL 6063-T6 Aluminum with Rubber Seal

FINISH Mill

MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

MOUNTING Flush - Suspended

JOINT SIZE 1 inch to 6 inches


SEAL LENGTH Continuous

APPLICATION Interior

INSTALLATION Ceiling

OPTIONS Seal Color

SEAL COLORS

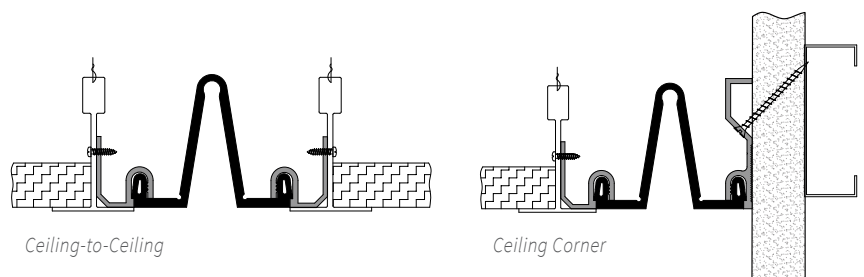

MODELS

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
LCE-100	Ceiling-to-Ceiling	1" (25mm)	0.75" (19mm)	0.5" (13mm)
LCE-100W	Ceiling Corner	1" (25mm)	0.75" (19mm)	0.5" (13mm)
LCE-200	Ceiling-to-Ceiling	2" (51mm)	1.75" (44mm)	2" (51mm)
LCE-200W	Ceiling Corner	2" (51mm)	1.75" (44mm)	2" (51mm)
LCE-300	Ceiling-to-Ceiling	3" (76mm)	2.75" (70mm)	3" (76mm)
LCE-300W	Ceiling Corner	3" (76mm)	2.75" (70mm)	3" (76mm)

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
LCE-400	Ceiling-to-Ceiling	4" (102mm)	3.75" (95mm)	4" (102mm)
LCE-400W	Ceiling Corner	4" (102mm)	3.75" (95mm)	4" (102mm)
LCE-500	Ceiling-to-Ceiling	5" (127mm)	4.75" (121mm)	5" (127mm)
LCE-500W	Ceiling Corner	5" (127mm)	4.75" (121mm)	5" (127mm)
LCE-600	Ceiling-to-Ceiling	6" (152mm)	5.75" (146mm)	6" (152mm)
LCE-600W	Ceiling Corner	6" (152mm)	5.75" (146mm)	6" (152mm)