

Floor-to-Floor

Floor-to-Wall/Corner

DETAILS

MOUNTING Surface

PRODUCT SPECIFICATIONS Refer to page 10


Elastomeric System

TOP MOUNT APPLICATION (LCFS/W)

The Top Mount System is designed for mounting directly over the expansion joint on top of the flooring material. The beveled edge provides smooth transition walking surface.

MODELS

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
LCFS-100	Floor-to-Floor	1" (25mm)	5" (127mm)	0.5" (13mm)
LCFS-100W	Floor-to-Wall	1" (25mm)	2.75" (70mm)	0.5" (13mm)
LCFS-200	Floor-to-Floor	2" (51mm)	6" (152mm)	1" (25mm)
LCFS-200W	Floor-to-Wall	2" (51mm)	3.78" (96mm)	1" (25mm)

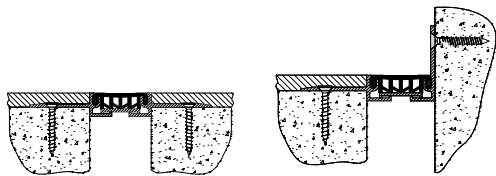

Floor-to-Floor

Floor-to-Wall/Corner

DETAILS

MOUNTING Surface

PRODUCT SPECIFICATIONS Refer to page 10


Elastomeric System

FLOORING INFILL APPLICATION (LCFC/W)

Nystrom's Flooring Infill Elastomeric Expansion Joint System is a surface mounted system that is designed for mounting directly over the expansion joint and receives flooring on top of the installed assembly.

MODELS

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
LCFC-100	Floor-to-Floor	1" (25mm)	1" (25mm)	0.5" (13mm)
LCFC-100W	Floor-to-Wall	1" (25mm)	1" (25mm)	0.5" (13mm)
LCFC-200	Floor-to-Floor	2" (51mm)	2" (51mm)	1" (25mm)
LCFC-200W	Floor-to-Wall	2" (51mm)	2" (51mm)	1" (25mm)

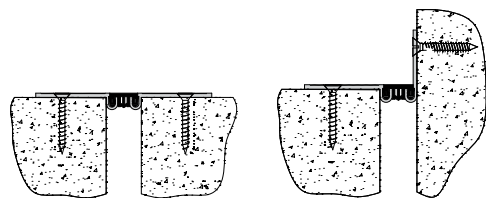

Floor-to-Floor

Floor-to-Wall/Corner

DETAILS

MOUNTING Surface

PRODUCT SPECIFICATIONS Refer to page 10

Elastomeric System

TILE APPLICATION (LCFT/W)

This system is designed to be mounted directly over the joint openings for tile applications. The flooring mounts flush to the edge of the assembly.

MODELS

MODEL	INSTALLATION	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
LCFT-100	Floor-to-Floor	1" (25mm)	5" (127mm)	0.5" (13mm)
LCFT-100W	Floor-to-Wall	1" (25mm)	2.78" (71mm)	0.5" (13mm)
LCFT-200	Floor-to-Floor	2" (51mm)	6" (152mm)	1" (25mm)
LCFT-200W	Floor-to-Wall	2" (51mm)	3.78" (96mm)	1" (25mm)