

Seismic Security

EXTERIOR WALL SYSTEM (RJX/W)

The seismic security exterior application provides an aluminum cover plate for security and includes a moisture barrier for added water and air protection.



FEATURES

SEISMIC MOVEMENT System realigns itself with the self-centering bar, maintaining a safe, clean look.

WEATHER TIGHT The integrated moisture barrier will keep the elements out and the comfort in.

ARCHITECTURAL ELEGANCE The clear anodized cover plate finish provides a high-end appearance.

DETAILS

MATERIAL 6063-T6 Aluminum

FINISH Clear Anodized

MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

MOUNTING Surface


JOINT SIZE 6 inches to 24 inches

LENGTH 10 Linear Feet


APPLICATION Interior or Exterior

INSTALLATION Wall or Ceiling

OPTIONS Brass, Stainless Steel, Fire Barrier, Smaller sizes available, specify RJE

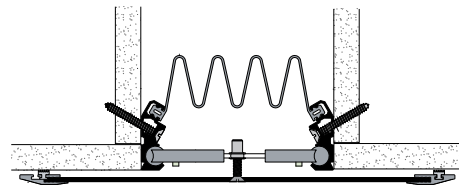

Wall-to-Wall

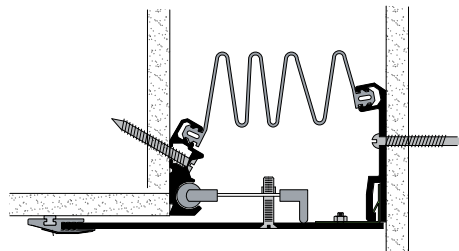

Wall/Ceiling Corner

MODELS

WALL-TO-WALL

MODEL	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
RJX-600	6" (25mm)	13.5" (343mm)	9.75" (248mm)
RJX-800	8" (51mm)	17.5" (445mm)	13.75" (349mm)
RJX-1000	10" (76mm)	21.5" (546mm)	17.25" (438mm)
RJX-1200	12" (305mm)	25.5" (648mm)	21" (533mm)
RJX-1800	18" (457mm)	37.5" (953mm)	33" (838mm)
RJX-2400	24" (610mm)	49.5" (1257mm)	45" (1143mm)

CORNER

MODEL	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
RJX-600W	6" (25mm)	9.75" (248mm)	6.25" (159mm)
RJX-800W	8" (51mm)	12.75" (324mm)	8.25" (210mm)
RJX-1000W	10" (254mm)	15.75" (400mm)	10.25" (260mm)
RJX-1200W	12" (305mm)	18.75" (476mm)	12.25" (311mm)
RJX-1800W	18" (457mm)	27.75" (705mm)	18.25" (434mm)
RJX-2400W	24" (610mm)	36.75" (984mm)	24.25" (616mm)