


Safe-T-Lume™

TWO-PART STAIR TREAD + NOSING



STTM-P3.375E-C1
shown

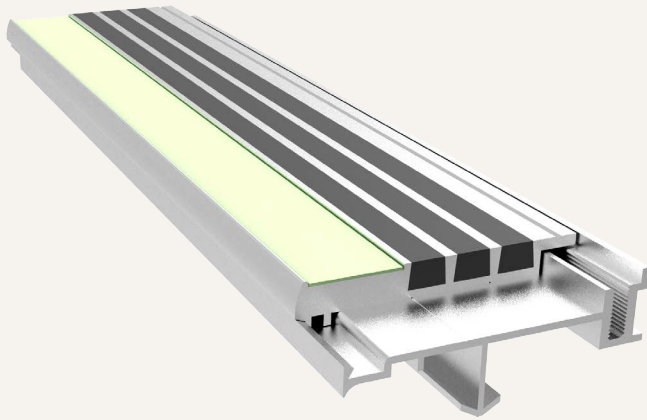

The Safe-T-Lume is a two-part system allows for quick and easy damage replacement. The 1 inch wide front rib provides a continuous photoluminescent stripe that will glow-in-the-dark when activated.

FEATURES

BRIGHTNESS The embedded glow-in-the-dark photoluminescent material provides needed illumination for a safe exit. Choose between an embedded resin with superior glow or abrasive grit insert that exceeds code requirements.

DURABILITY The stair treads and nosings are long-lasting. They are designed with materials that last, like extruded aluminum and abrasive grit.

INSTALLATION EASE Easily replace damaged or worn treads by installing new inserts. Installation and maintenance manuals are available at www.nystrom.com.

DETAILS

MATERIAL Extruded Aluminum, Abrasive Grit and 53 mil Resin or 21 mil Abrasive Grit Insert

COLOR Black and photoluminescent

APPLICATION Poured Concrete or Steel Pan

TREAD Ribbed Abrasive

WIDTH 3-3/8 inches

LENGTH Up to 12 linear feet

MOUNTING Anchor


NOSING Short-Tipped

OPTIONS Mitered Cuts, Painted Undersides or Taped Tops

CODE COMPLIANCE 2015/2018 IBC Section 1025, 2015/2018 IFC Section 1025

TEST STANDARD ASTM 2072, UL 1994

NOSING



Short-Tipped

INSERT




Resin




Abrasive Grit


OPTIONS



Mitered Cuts



Painted Undersides



Taped Tops

MODELS

MODEL	WIDTH	INSERT
STTM-P3.375E-C1	3-3/8"	Resin
STTM-P3.375E-C1-T	3-3/8"	Abrasive Grit